



3PS Network Server 3.0

System Administrator's Manual

For V3.0.06 Version

About This Manual

Target Audience

This manual is intended for **System Administrators** who are responsible for installing and setting up 3PS Network Server 3.0 surveillance system. The reader is expected to know the fundamentals of IP surveillance system integration and to own the administrative privileges to achieve all the tasks.

Content Overview

This manual provides information needed for planning the installation, installing, setting up the system and configuring the video streaming devices. Its main content consists of the following three sections:

- **Getting Started** provides the preparatory knowledge you should study before starting installation, such as system requirements, license registration and backup/restore procedures.
- **Log in to the System** explains how to log in to the system right after a successful installation.
- **System Setup** gives instructions on the tasks such as adding devices to the system, configuring the device settings, scheduling the recordings, managing events, managing storage, managing groups/users and setting up Live View. For each major task, you will be given a brief introduction of operation principles, step-by-step instructions, and a simple method to check if you have done it correctly.

Related Documentation

Since this manual focuses on how to accomplish the tasks for system installation and configurations, there is very limited information about operation-wise directions for **End Users** who will be operating 3PS Network Server system. To obtain the instructions on use of 3PS Network Server applications such as monitoring and playback, please download the latest [3PS Network Server 3.0 User's Manual](http://www.inaxsys.com/en/support/downloads/manuals-specifications.html) from Inaxsys website via <http://www.inaxsys.com/en/support/downloads/manuals-specifications.html>.

Technical support

If you have any questions during system installation, please feel free to contact our Technical Support at support@inaxsys.com

Conventions Used in This Manual

The following are typographic conventions used in this manual:

- **Bold**: Bold typeface is used for a keyword, major functions of 3PS Network Server, or a title of a section/column.
- *Italic*: Italic typeface is used for a filename or location path.
- Underlined: Underlined typeface is used for a document name or hyperlink.
- **"Bold"**: Bold interface enclosed in double quotation marks indicates the name of a button, a menu or a choice item.

Some notices are placed within the following boxes; each type of the box indicates different purposes or levels of importance for system:

Important Notice

The content within this box is an **important notice**. This notice is important for you to get certain functions to work properly, or to prevent from certain potential problems that may damage your system. Make sure you read this notice and follow the instructions.

Note

The content within this box is a **note**. A note is some necessary information you need to know about the action you are currently taking, like what will happen after you follow or don't follow certain procedure.

Tip

The content within this box is a **tip**. A tip gives you an alternative method to easily or quickly achieve an objective, usually for specific conditions.

Legal Notice

Disclaimer

- The information contained in this document is intended for general information purposes. Inaxsys Security Systems Inc. shall not be liable for errors contained herein or for incidental or consequential damages arising from the furnishing, performance, or use of this manual.
- The information contained herein is subject to change without notice.
- The English version of this document is the official one for all purposes. All the translated versions are provided as a convenience. Any discrepancies or differences created in the translations of any other languages are not legally binding.

Copyright

Copyright ©2003-2013 Inaxsys Security Systems Inc. All Rights Reserved.

Trademarks

- 3PS Network Server and its logo  are registered trademarks of Inaxsys Security Systems Inc.
- Microsoft® and Windows® are registered trademarks of Microsoft Corporation.
All other product or company names mentioned in this document may be trademarks or registered trademarks of their respective owners.

Table of Contents

1 About This Manual 2

Target Audience.....	2
Content Overview	2
Related Documentation	3
Technical support.....	3
Conventions Used in This Manual	4

2 Legal Notice 5

Disclaimer	5
Copyright	5
Trademarks	5

3 Table of Contents 6

4 Overview 11

3PS Network Server / Client Architecture.....	11
---	----

5 System Installation Check List 12

6 Getting Started 14

System Requirements	14
Prerequisites.....	16
1. Suitable System Specifications	16
2. Uninstall Previous 3PS Network Server 2.x.....	16
3. More than 40 GB Space on Storage Drive	16
4. Turn Off Windows UAC Function	16
Disable UAC in Windows 7	16
Server Installation	18
Install the Software	18

Workstation Installation.....	21
Install the Software	21
License and Activation.....	22
Online Activation	24
Offline Activation	24
Step-by-step Activation Process	25
Online Activation SOP	Error! Bookmark not defined.
Offline Activation SOP	25
Verify Your License	26

7 Log In to the System **27**

Access 3PS Network Server via Internet Explorer	27
From Server Computer Using Local Client.....	27
From Remote Client Computer	27
Accept ActiveX Controls Installation Requests	27
Login Failure Troubleshooting.....	27
Condition 1: Why can't I access 3PS Network Server via browser?	28
Condition 2: Why can't I install Active X controls after logging in?	29
Login	31
A. Enter Account & Password	31
B. Change UI language	31
C. Remember Account/Password	31
D. Retrieve the Forgotten Password	31
Access 3PS Network Server via 3PS Network Server Workstation ...	32
Login	32
A. Server IP & Server Port	32
B. Enter Account & Password	32
C. Choose the Initial Screen	32
D. Language	33
E. Remember Login Information	33
F. Retrieve the Forgotten Password	33
G. Server Name/Server Sites List	33

8 Set up the System **35**

Setup Wizard.....	35
System Settings	36

Storage	36
3PS Network Server Main Screen	38
Live View.....	38
Playback	38
Setup.....	38
Add Devices	39
Search Devices Within Local Area Network.....	40
Add Devices on WAN or Other Local Area Networks	42
Basic Settings Attributes	43
Device Status.....	44
Status Icon Description	44
Add Non-Inaxsys Cameras	45
Manage Multiple Devices	47
Modify Basic Connection Settings.....	47
Delete Devices.....	47
Copy Settings Across Devices	47
Add Video Streams from a Multi-channel Device	49
Configure Device Settings	50
Configure Video Format	50
Video Settings Attributes	50
Save Storage by Setting Event Recording Frame Rate	51
Schedule Recording	51
Event Recording	51
Event Recording with Frame Rate Adjustment	52
How to Make Use of Event Recording with Frame Rate Adjustment	52
Fine-tune the Image: Brightness/Contrast/Saturation/Hue	53
Video Adjustment Attributes	54
Configure Motion Settings.....	54
Adjustment Attributes	55
Configure PTZ Device.....	56
Adjustment Attributes	57
How to Do Live PTZ Operation	58
Set PTZ Preset Points.....	60
Set PTZ Preset Tour	61
Configure Fisheye Cameras	62
Schedule Recordings.....	65
Configure the Recording File Properties	65
Attributes Explanation	65
Set the Schedule.....	67

Use Time Setting Quick Buttons to Set the Time in One Click	68
Lock Specific Days	69
Copy an Existing Schedule to Others	70
View the Entire Recording Schedule.....	71
Event Management.....	72
How Does 3PS Network Server Handle Events.....	72
How to Edit an Event Rule	73
Manage the Event Rules.....	76
Delete the Event Rules	77
How to Setup SMTP Settings for Event Rules	77
How to Setup FTP Settings for Event Rules	78
System Log	80
Define Search Time	80
Choose Log Type.....	81
Read the Log	81
Export the Log.....	82
Storage Management	83
Change Recordings Folder Name.....	83
Set System Log Lifecycle.....	83
Set Hard Drives for the Recorded Files Deletion Rule	83
Manage User Groups/ Users	85
Overview	85
User Groups.....	86
Add Users	88
Domain Users Management	90
Customize Views	91
Step 1: Create a New View	92
Step 2: Enter Edit Mode	92
Step 3: Select a Layout	92
Step 4: Add Video Source.....	93
Step 5: Add a Map	93
Step 6: Add Devices to the Map.....	95
Step 7: Adjust the Channel Size & Layout	96
Step 8: Save the View.....	96
Step 9: Set Default View	96
Step 10: Set Default Hotspot Channel (Optional).....	97
Step 11: Set Fisheye Camera Mode	97
Manage the Views	98
Set View Link	99

Set View Patrol	99
Tips to Enhance Live View Performance	101
Let Windows Automatically Start with 3PS Network Server Live View	102
Customize System Language.....	103
System Languages List.....	103
Display Configurations	106
Video & Snapshot Export Configurations	107
Joystick	108
Joystick Configurations	108
Un-install Server Software	109
Step 1: Remove 3PS Network Server 3.0 Program	109
Step 2: Remove 3PS Network Server 3.0 Program Folder (Optional)	110
Step 3: Remove the Recordings Folder (Optional)	110
Back Up System Data.....	111
Step 1: Back up System Settings.....	111
Step 2: Back up Recording Files Folder (Optional)	112
Step 3: Back up Recording Files Index Folder (Optional)	112
Step 4: System Log (Optional)	112
Restore System Data.....	113
System Migration.....	114
Migrate from 3PS Network Server 2.3 to 3PS Network Server 3.0.....	114
3PS Network Server 2.3 to 3PS Network Server 3.0 Data Compatibilities	114
Migrate 3PS Network Server 3.0 to Another Computer	115
Advanced Administrative Tasks.....	116
3PS Network Server Status	116
Change Server Port	116
Change Authentication Method.....	117

Overview


3PS Network Server 3.0 (hereafter referred to as **3PS Network Server**) is a Windows-based software that provides distributed network video surveillance solution with full functionality. This software supports centralized management, scheduled recording, real-time monitoring and recording of up to **24** Inaxsys video streaming devices from local or remote network, with rule-based services to trigger multiple schedules and events.

Inaxsys 3PS Network Server / Client Architecture

3PS Network Server 3.0 is a typical web-based server/client system. In a video surveillance system architecture, the **Server** serves as a video management service provider, aimed to run 24/7 offering non-stop services for clients. A **Client** makes requests of monitoring video streams or playback recordings to **Server**, which can reside on the same computer with server program (as from local) or on another computer (as from remote). **Server** starts automatically as soon as the **Server computer** (where it is installed) boots up, and operates in the background without requiring login by administrator. It would provide services over the TCP/IP network to multiple **Clients** upon request through HTTP Protocol.

There are two types of **Clients** in 3PS Network Server 3.0 system: **Web Client** and **Workstation Client**. A user, connecting from whether web browser or workstation, will enjoy the same user interface and 3PS Network Server functions.

- **Web Client:** the web version of interface to access 3PS Network Server without need of installing any client program to become a client. Logging in the 3PS Network Server is as simple as visiting a website through IE browser.
- **Workstation Client:** the client application making accessing 3PS Network Server free from the use of browser. The workstation includes a set of programs that provide interface between users and the 3PS Network Server.

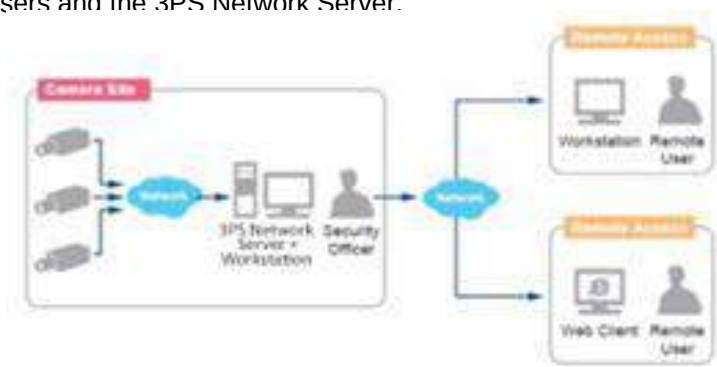

System Installation Check List



Pre-installation				
Item		Task	Description	Reference
1	☐	Prepare software license	3PS Network Server 3.0 comes with 16-channel free license. For additional channels, please purchase the license from your system supplier and get the license information ready before activation.	License and Activation on page 22
2	☐	Prepare the server computer	Make sure the computer's hardware spec, operating system and IE browser version are compatible with software requirements.	System Requirements on page 14
3	☐	Assign a fixed IP for server computer	The server computer should have a fixed IP to be used by 3PS Network Server 3.0.	
4	☐	Set up Active Directory (Optional)	To add users through the Active Directory service, please make sure an Active Directory server is available on your domain.	
Installation				
Item		Task	Description	Reference
5	☐	Install 3PS Network Server 3.0 software	Follow the instructions to install the software on server computer.	Server Installation on page 18
6	☐	Check if the installation is successful	Log in to 3PS Network Server to check if you can see the login page. (On server computer, type http://localhost in browser's URL bar).	Log In to the System on page 27
7	☐	Activate the license (When required number of channels exceeds 16)	Activate your license key to get your required number of channels ready for adding devices.	
Configuring the Devices				
Item		Task	Description	Reference
8	☐	Get the devices connected and ready for use	Finish the installation and basic settings of all devices (IP address, usernames, passwords), and attach all external hardware devices (alarms or sensors) if necessary.	
9	☐	Connect external devices with the 3PS Network Server Client PC	Attach necessary external hardware peripherals such as a joystick or a microphone to the client computer.	Joystick on page 108
System Setup				
Item		Task	Description	Reference
10	☐	Configure the Storage Settings	Activate the disks for recordings and make sure the total size is sufficient, and how many days the recordings are kept on disk.	Storage Management on page 83
11	☐	Add devices to 3PS Network Server	Add devices and configure camera settings: camera name, video/motion/PTZ settings.	Add Devices on page 39;

				Configure Device Settings on page 49
12	☐	Configure Recording Schedule	By default, each device will start 7/24 schedule recording as soon as it is added. Set recording schedule for each device.	Schedule Recordings on page 62
13	☐	Configure Email & FTP settings	Complete the Email or FTP settings and test if 3PS Network Server succeeds in sending emails and uploading files. This step is necessary if you will use these functions for Event Handling.	How to Setup SMTP Settings for Event Rules on page 77 ; How to Setup FTP Settings for Event Rules on page 78
14	☐	Configure Event rules	Set the event rules.	How to Edit an Event Rule on page 73
15	☐	Create Users Accounts & Groups	Configure User Group permissions and create required User Accounts.	Manage User Groups/ Users on page 85

Live View Setup

Item		Task	Description	Reference
16	☐	Create Views for Users	Customize and save views for Live View screen.	<u>Customize Views</u> on page 91

Back up System Settings

Item		Task	Description	Reference
17	☐	Create backup of system settings	Create a backup file of current system settings for future re-installation or in case of critical system failure.	Back Up System Data on page 111

Post-installation Validation

Item		Item	Description	Reference
18	☐	Live Preview basic operations	Make sure if user is able to see the live view with saved layouts and perform basic operations (e.g. PTZ controls or instant playback).	User's Manual
19	☐	Schedule Recording	Make sure the disk is recording normally according to the schedule.	
20	☐	Event Handling	Check if the expected actions (e.g. recording, alarms or email notification, etc) are correctly triggered by events.	
21	☐	User Access	Make sure User can access 3PS Network Server with right account/password, and perform operations based on given user rights.	
22	☐	Playback	Make sure user can perform playback and video search, and the export function can generate viewable files to designated folder.	

Getting Started

System Requirements

The **Minimum CPU Processor** spec will provide acceptable performance for systems that use mostly MPEG4 streams. Surveillance systems that use 4 or more H.264 streams should satisfy **Minimum CPU Processor** spec for good performance.

PC Spec		Server + Local Client PC		Server PC Only	Remote Client PC	
Number of Live Channels (*2)		1-16	17-64	0	1-16	17-64
CPU Processor	Minimum	Intel Core 2 Quad 2.4GHz	Intel i5 2.4 GHz	Intel Core 2 Quad 2.4GHz	Intel Core 2 Quad 2.4GHz	Intel i5 2.4 GHz
	Recommended	Intel i5 2.4 GHz	Intel Core i7-920 2.67 GHz	Intel i5 2.4 GHz	Intel i5 2.4 GHz	Intel Core i7-920 2.67 GHz
RAM		4GB (*3)				
Network		Ethernet (1000 Base-T recommended)				
Hard Disk (*4) Space		Minimum 40 GB (*5)				
Operation System (*6)		Windows 8, Windows 7, Windows Server 2012, Windows Server 2008				
Display Resolution		Minimum: 1024 X 768				
Browser		Internet Explorer 9 and 10				

***1** These specifications are based on following camera settings:

Single stream mode → 1280x1024, 3Mbps, 18fps, MPEG-4

Dual stream mode → 1280x1024, 3Mbps, 18fps, H.264 (recording);
640x480, Quality: 100, 18fps, MJPEG (live view).

***2** Live view for multiple channels requires good hardware for smooth performance. For more channels or heavy use of high resolution streaming, it is good to adopt computers with more advanced specifications than the requirements we suggest.

***3** Please use 64-bit system if your computer has more than 4GB RAM. Windows operation system has limits on memory and address space regardless of the real or virtual memory available on a particular computer. Take Windows 7 Professional for example, the maximum physical memory for a 32-bit(X86) system can address is 3.5 GB even though 16 GB of RAM has been installed on this computer. Therefore, if you consider increasing the computer's multi-tasking capability by adding more RAM, you will need a 64-bit version of Windows to

take advantage of it all.

Please visit the link below for more memory limitations on various Windows platforms.

http://msdn.microsoft.com/en-us/library/aa366778%28VS.85%29.aspx#physical_memory_limits_windows_7

Besides the limitation mentioned above, you may find the usable memory of your computer displayed here:  → **Computer** → **Properties** is still less than actual installed memory.

This is a common symptoms of all Windows platforms, please find explanations and solutions in this Windows official support document

<http://support.microsoft.com/kb/978610/en-us> and

<http://windows.microsoft.com/en-us/windows7/taking-the-mystery-out-of-64-bit-windows>

***4** Supports local hard drives and iSCSi NAS.

***5** The required free space of the disk drive where 3PS Network Server is installed should be at least 40 GB at all times; however, the actual necessary space depends on number of devices, recording and event rules settings. To get an approximate value, you may use the software tool

Bandwidth & Storage Calculator - <http://www.inaxsys.com/en/support/disk-calculator.html>.

It is also recommended to use a separate disk for video recordings.

***6** Please make sure your operation system is fully patched with the latest service packs.

Prerequisites

These prerequisites below are necessary before installation:

1. Suitable System Specifications

Ensure that the server computer meets the minimum system requirements, and that the server computer has **C Drive**.

2. Uninstall Previous 3PS Network Server 2.x

3PS Network Server 3.0 and 3PS Network Server 2.x cannot co-exist on the same server computer. You can find instructions on [System Migration](#) on page 114 for how to perform a 3PS Network Server system migration.

3. More than 40 GB Space on Storage Drive

Please make at least 20 GB memory space on the storage disk drive. You may choose different disk drive on **Setup** page→**Storage** tab.


4. Turn Off Windows UAC Function

UAC (User Access Control) is a security setting that restricts access in Microsoft Windows. You must disable UAC before installing 3PS Network Server in **Windows Vista** and **Windows 7**, for the installation of application components and certain program features would be interrupted by this security rule. You may disable UAC through Windows control panel.


If you are using **Windows 8**, please enable the built-in **Administrator** account and log in with this identity, or add this 3PS Network Server site to IE browser's trusted sites (please follow the solution provided for **Condition 2: Why can't I install Active X controls after logging in?** on page 30 to do so).

Disable UAC in Windows 7

1. Go to **Windows Control Panel**, type "**UAC**" in search box.
2. Click "**Change User Account Control settings**"

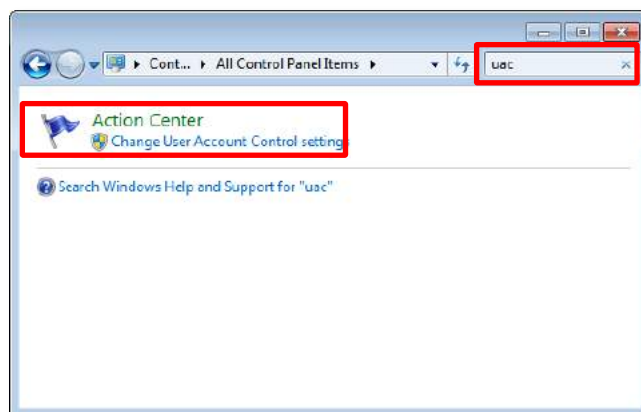

3. Move the slider to **"Never notify position"**, and then click **"OK"**. You will have to restart the computer for this change to take place.

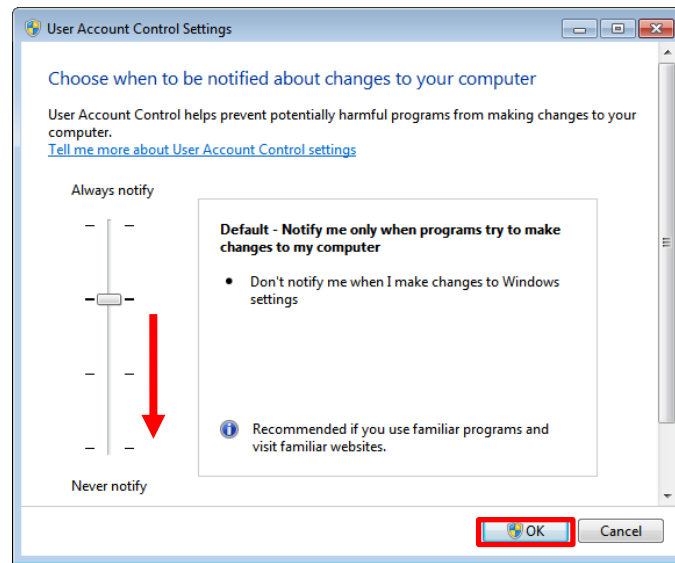

Server Installation


The server program installation is as easy as 1-2-3 by following the installation wizard's instructions. The server would start its service right after installation completes, without the need to restart the server computer.

Install the Software


1. Execute the install shield application .
2. Follow the onscreen instructions of **Install Shield Wizard**, accept the license agreement and proceed.




When selecting **Setup Type**, the default "**Complete**" will have the program installed on default **C drive**, you may select "**Custom**" to choose another program location.

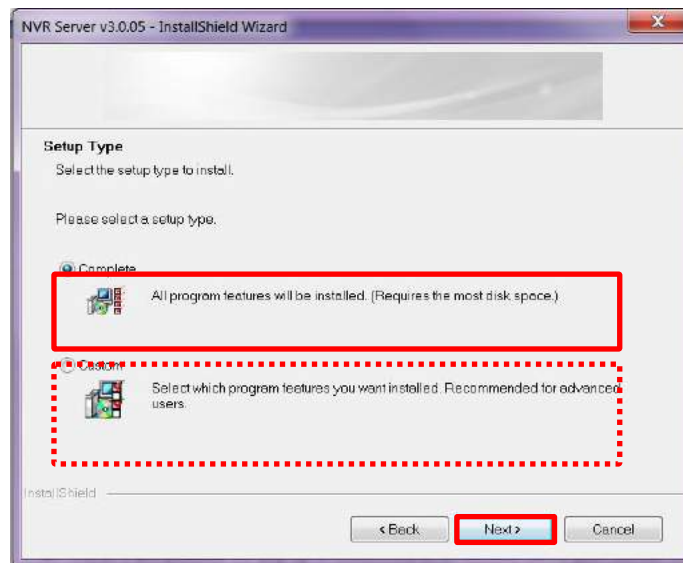


3. The **IP Port Checker** will pop up to confirm the 3PS Network Server port number with you. The installation program will use **80** as default. You may enter another available port number in "**Listen Port**" field and click "**Apply**".

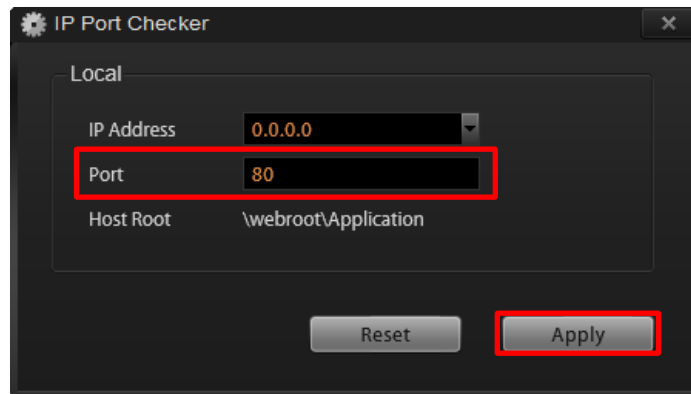

You may just click **“Apply”** if you are not sure whether this port has been taken or not. If the port is being used by another service, you will be asked to input another available port number.

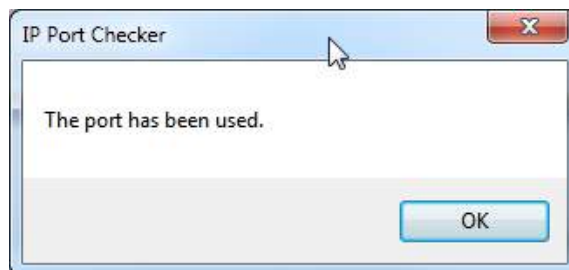

4. As the server port is confirmed, the installation process is done, click “**Finish**”.

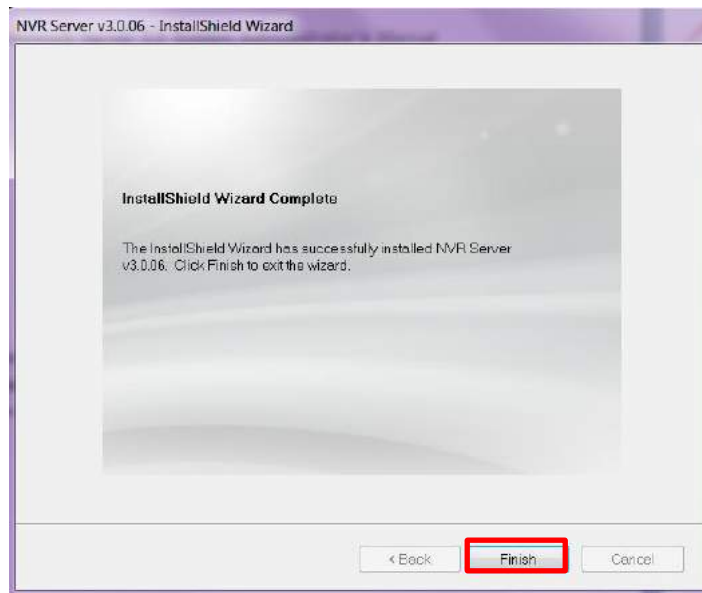

5. After the installation completes, connect to http://localhost:port_number with Internet Explorer browser, you will see 3PS Network Server Login page.

Note

If IIS Web Server has been installed on the computer and you are asked to restart the computer during installation process, please

1. Choose ☒ Yes, I want to restart my computer now. to restart right away.
2. After the computer reboots, this install shield will continue to complete the installation.

Important Notice



If the server computer has already installed previous 3PS Network Server 2.x versions, please remove the main program and patches from **Windows** → **Control Panel** before installing 3PS Network Server 3.0; or you should choose another computer as 3PS Network Server 3.0 computer.

Workstation Installation

3PS Network Server Workstation includes a set of programs that provide interface between users and the 3PS Network Server. It may be installed on the same PC as the 3PS Network Server, or they may be installed separately and connect to 3PS Network Server via network.

Install the Software

1. Execute the install shield application .
2. Follow the onscreen instructions of **Install Shield Wizard**, accept the license agreement and proceed.

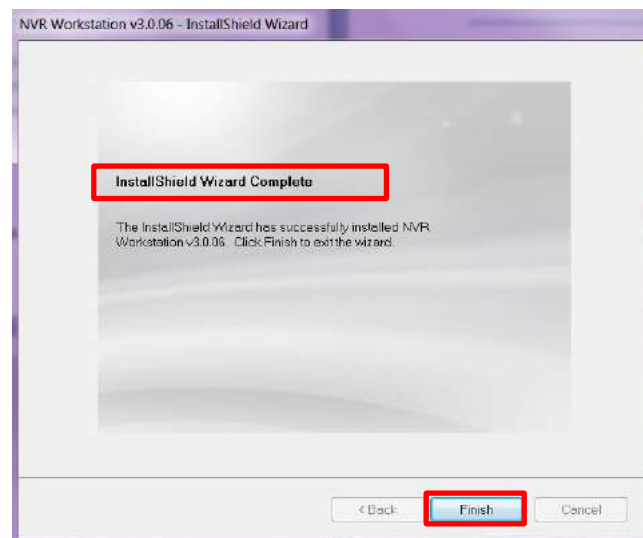

3. Double-click the shortcut  on desktop to execute the application.

License and Activation

In 3PS Network Server system, your required number of channels should be licensed and activated before connecting the devices. The **License Key**, provided by Inaxsys sales representative once your purchase of license is carried out, will be used to activate the license. After the license activation, the channels on 3PS Network Server will automatically become available.

Aside from Inaxsys brand devices, 3PS Network Server 3.0 system is able to support other vendors' devices. Inaxsys brand devices and non-Inaxsys brand devices are licensed by different license types:

- **Standard License**: Inaxsys brand devices

- **CDP License**: Other vendors' devices

(For supported non-Inaxsys cameras list, please refer to

<http://www.inaxsys.com/media/documents/3PSCameraSupportList.pdf>)

Please note:

- The license is cumulative and perpetual.
- The license is not version-specific, upgrading software version will not influence the existing license you have activated on 3PS Network Server 3.0.
- The number of CDP licensed channels (for non-Inaxsys brand cameras) and that of standard licensed channels (for Inaxsys devices) are counted separately.
- The maximum licensed channels (standard + CDP channels) on an 3PS Network Server 3.0 is **24**.
- After activating CDP license, please follow the instructions in [Add Non-Inaxsys Cameras](#) on page 45 to manually add those non-Inaxsys cameras to 3PS Network Server system.

License activation is the process of unlocking the channels on 3PS Network Server product with the received **License Key**. **License Key** is a serial number delivered as a printed card or an E-mail after the purchase is carried out.

During license activation, your **License Key** is matched against the MAC address of the Network Interface Card (NIC) on 3PS Network Server computer. Once this license key is used by the computer with given MAC, it cannot be activated with another MAC. This matching record will be stored on the Inaxsys license data server. If your computer has more than one network cards, 3PS Network Server will detect them and provide you a dropdown list to select from.

Note

Although certain fisheye camera view modes (e.g. **Quad** mode) display multiple regions in a view, they are still counted as one single channel in terms of licensing.

There are two ways to activate the licenses depending on your 3PS Network Server condition:

Online Activation and **Offline Activation**.

Online Activation


This feature is not yet active. Please contact Inaxsys for more information.

For activating licences, please go to OFFLINE registration.

Offline Activation

Offline activation does not require Internet access for 3PS Network Server. It is used when 3PS Network Server is located in network not connected to public Internet (e.g. in a military base).

You will need to get an activation file from another computer and transfer it to 3PS Network Server computer.

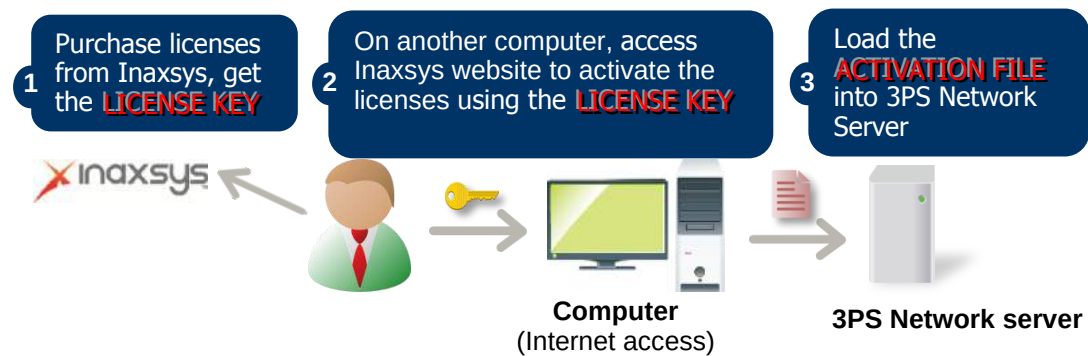

Step-by-step Activation Process


Based on the network conditions if your site, follow

[Offline Activation](#) SOP to activate your license.

Offline Activation SOP


Step 1: Purchase licenses from Inaxsys and get license key.

Step 2: Log in 3PS Network Server from local or via web client. Go to **Setup** page → **System** tab → **License** → “**Offline Registration**” → click “**Import**” and upload the license file(.lic). Click “**Apply**” to activate this license.

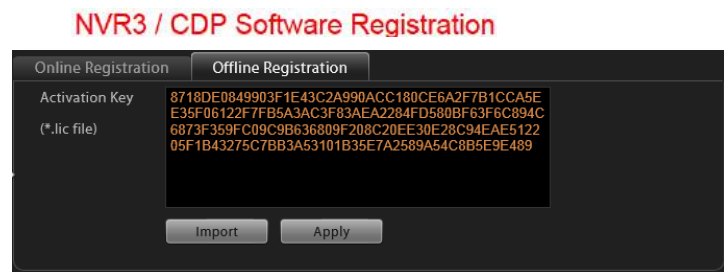

Verify Your License

Once your license is successfully activated, the license information will be shown on **License** page.

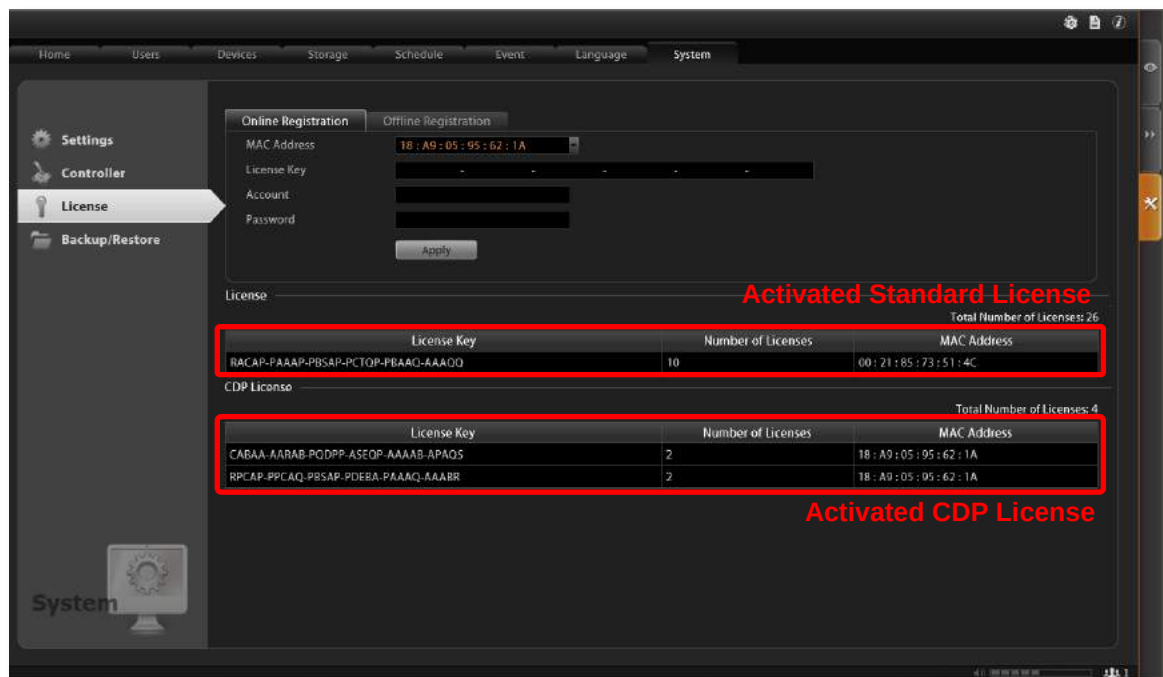

Important

The license data will be erased once 3PS Network Server 3.0 is uninstalled. Be sure to retain your license key information in a safe place because you may need to reinstall the software. After the software is uninstalled, you should contact **Inaxsys Technical Support** at support@inaxsys.com to clear the original registration data in our data server, and then you may activate the license again.


Tip

How to find MAC Address

1. Click **Windows Start**, in the run box on **Start** menu, input "**cmd**".
2. Execute the **cmd** program, and input the command "**ipconfig /all**" or "**getmac**".
3. The MAC address will be referred to as the **Physical Address**, made up of 12 characters e.g. **00-1E-65-FE-8E-98**

Log In to the System

Access 3PS Network Server via Internet Explorer

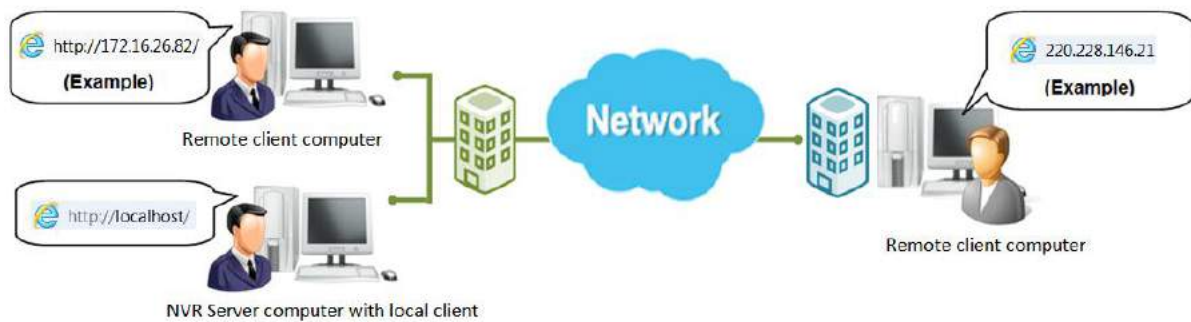

From Server Computer Using Local Client


Open Internet Explorer. If your computer is where 3PS Network Server 3.0 is installed, type <http://localhost/> or the computer's ip address in URL box.

From Remote Client Computer

A remote client refers to any client using a computer over WAN or LAN other than server computer. If you are connecting to a 3PS Network Server 3.0 as a remote client, please type server computer's ip (e.g. local network ip: <http://172.16.26.217> within LAN ;public IP <http://220.228.146.21> or domain name <http://nvr.inaxsys.com> over WAN) in URL box. Remember to append a colon and the port number after the hostname or IP address.

Accept ActiveX Controls Installation Requests

3PS Network Server 3.0 interface requires the add-on ActiveX Control components, please make sure browser's security settings allow ActiveX controls to be downloaded and installed. When your browser asks if you allow Inaxsys's add-on components to run, please allow the

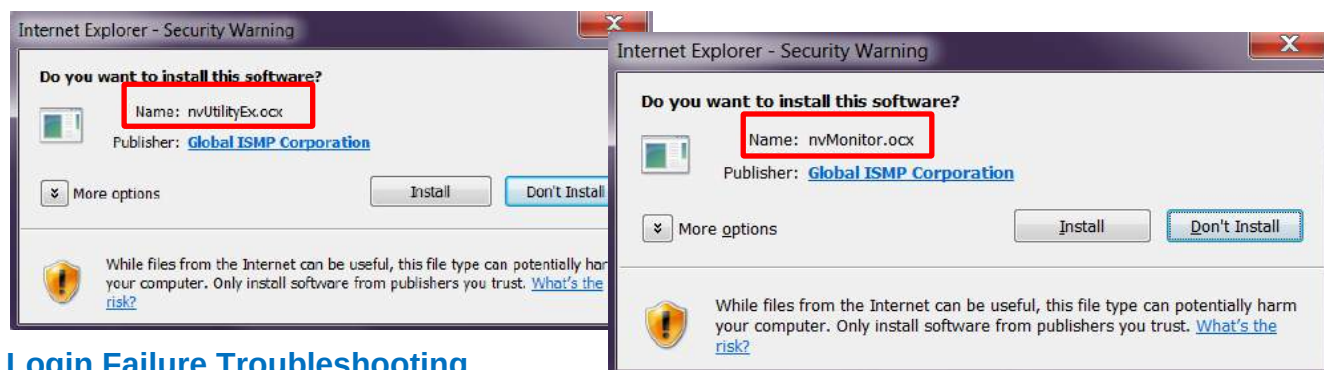


Login Failure Troubleshooting

Once you confront with problems accessing 3PS Network Server, refer to the possible conditions below and follow the instruction to solve your issues.

Condition 1: Why can't I access 3PS Network Server via browser?

After typing in the correct 3PS Network Server IP, if you cannot access 3PS Network Server Login page, you may get the below browser screens:

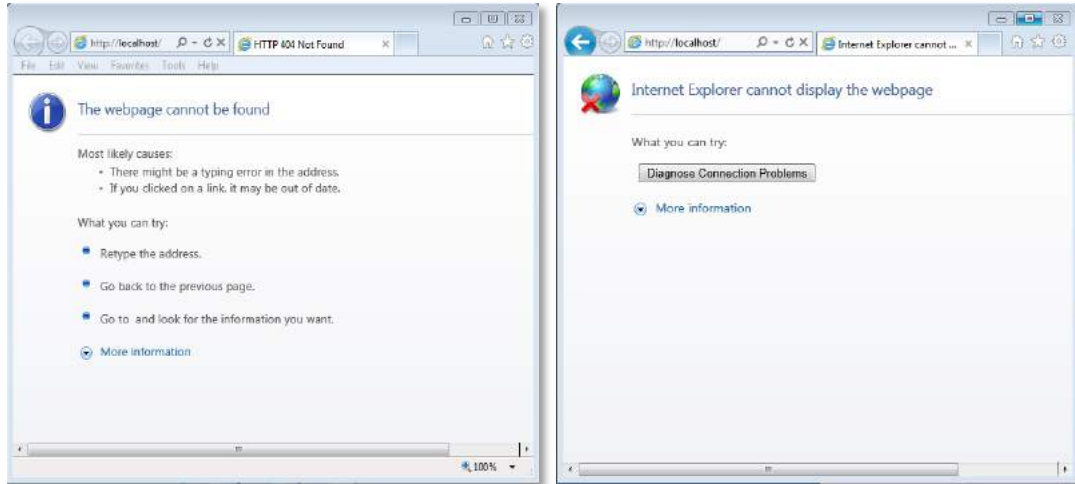


Cause 1: Server is not ready

Solution: It may happen when you just started the server computer or the server installation has just finished, please wait a few seconds and connect again.


Cause 2: Server is not able to respond to your request through current path because port 80 has been seized by another service running on server computer. This may happen when that service is executed right before 3PS Network Server starts its services.

Solution: Please check if there is another service using port 80 right now, and change the setting in that program to release port 80 for 3PS Network Server 3.0. Below are the steps to find the service:

1. Please click on "**Windows Start**" (Windows-Logo) , then enter "**cmd.exe**" in the run box and execute it.
2. Input the command "**netstat -a -o -b**". You will be provided with the ports in use and the services using them. Find the **Local Address** that has taken port **80**, and the **PID** number.

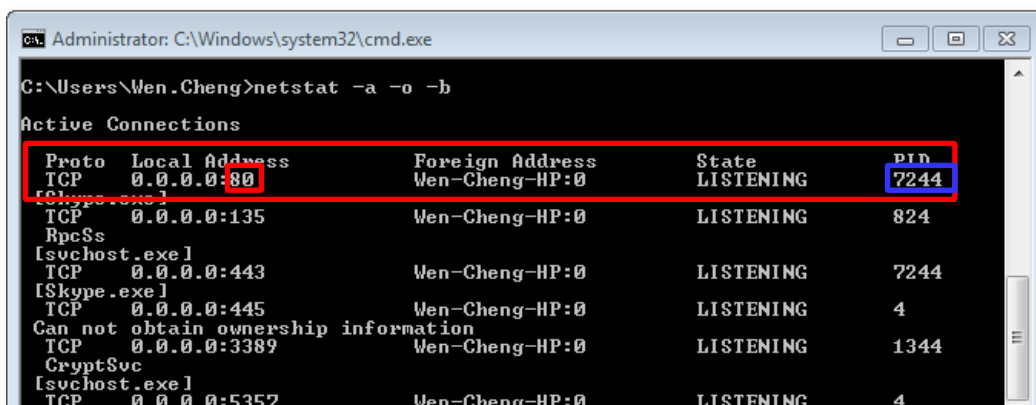


- Press down “ctrl”+ “alt” + “Delete” keys to bring up **Windows Task Manager**. Select “**View**”, and then “**Select columns**”, and enable the “**PID (Process Identifier)**” to appear on search results. Please also make sure “**Show process from all users**” is enabled.
- On **Task Manager Process** tab, locate the PID number of the service using port 80. The service name is shown under “**Image Name**” column.

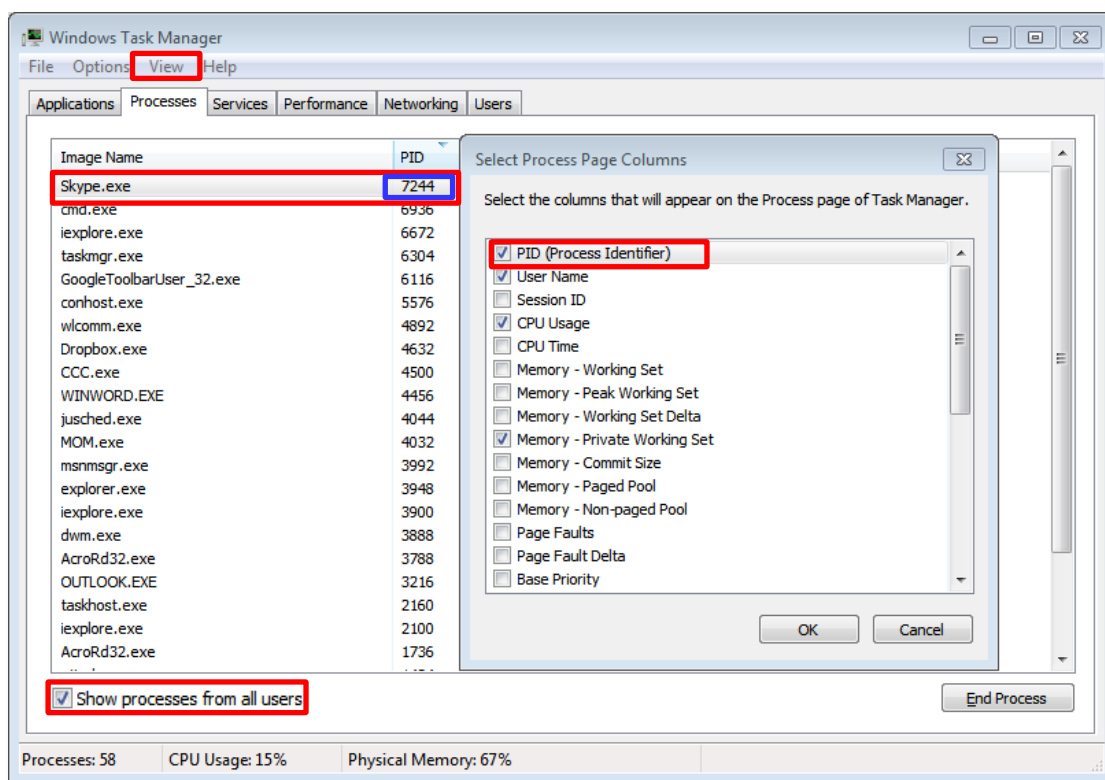

Condition 2: Why can't I install Active X controls after logging in?

ActiveX Control components are essential for 3PS Network Server to present user interface. The message below will show if these controls were not installed. Please try refresh this browser first, this is to make IE pop up the prompts again.

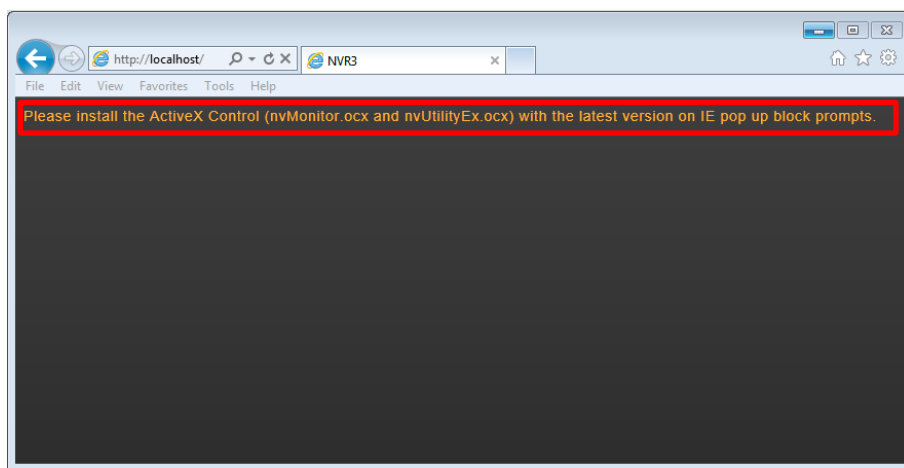


Cause 1: Your **Internet Explorer** browser version does not support 3PS Network Server 3.0.

Solution: Make sure your browser is **32-bit** version.


Cause 2: Your browser restricts the installation of add-on components.

Solution: Internet Explorer security settings may restrict the installation of add-on components. To ensure 3PS Network Server is always accessible from your web client regardless of any change in browser's overall Internet security settings, you may add 3PS Network Server site to Internet Explorer's Trusted sites. These sites are which you consider safe and wish to visit with low security restrictions while maintaining higher security for the rest of the Internet.

1. On IE browser, click **Tools** → **Safety** and make sure **ActiveX Filtering** is unchecked.
2. On IE browser, go to **Tools** → **Internet Options** → **Security** tab, select "**Trusted sites**", set the security level to "**Medium High**", and then click "**Sites**".
3. Add <http://localhost> or server IP to the zone, and **clear** the box "**Require server verification (https:) for all sites in this zone**".
4. Back on **Security** tab, click "**Apply**" to apply the changes. This will allow ActiveX and scripting to be available for the chosen sites but not for the Internet as a whole.

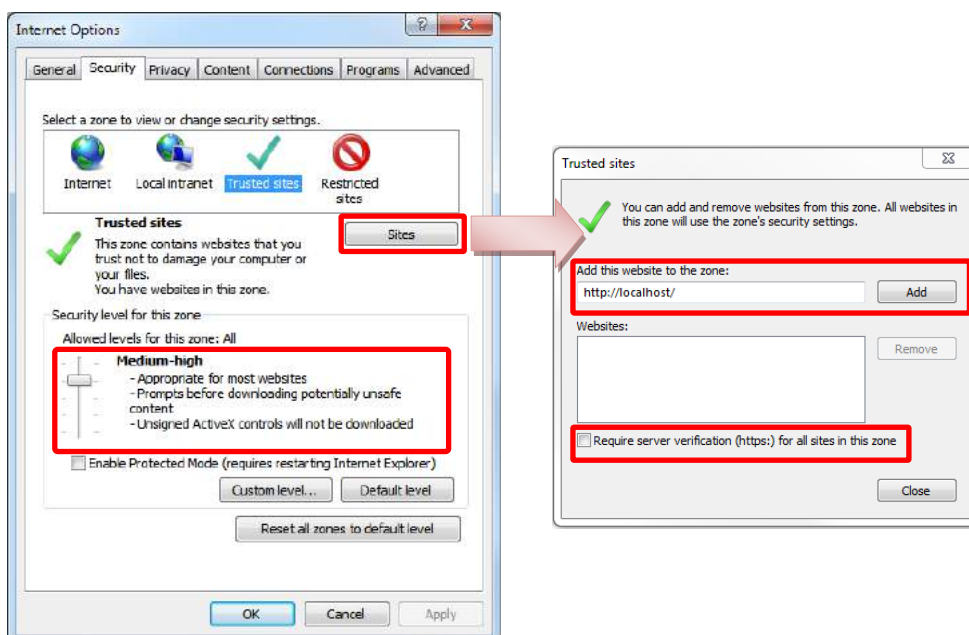

Login

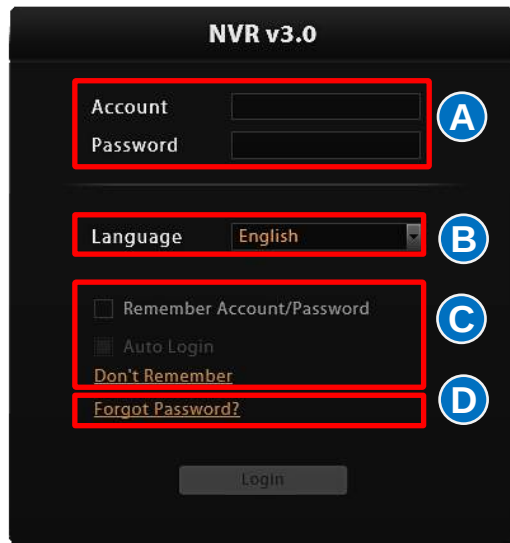

The login interface for NVR v3.0. It features a dark background with white text. At the top, it says 'NVR v3.0'. Below this, there are four main sections labeled A, B, C, and D. Section A contains 'Account' and 'Password' input fields. Section B contains a 'Language' dropdown menu set to 'English'. Section C contains checkboxes for 'Remember Account/Password', 'Auto Login', and 'Don't Remember'. Section D contains a 'Forgot Password?' link. At the bottom, there is a 'Login' button.

A. Enter Account & Password

Account (non case-sensitive):

admin (default)

Password (case-sensitive):

123456 (default)

B. Change UI language

To change UI language, select the desired language from “**Language**” dropdown list.

C. Remember Account/Password



To have the server remember your Login **Account** and **Password** for future, check “**Remember Account/Password**”. Click “**Don't Remember**” will clear your input text and reset to default.

To directly enter the main page every time you log in from this PC in the future Check “**Remember Account/Password**” then “**Auto Login**” to skip the Login page. **If your computer may be accessed by someone without proper authority, please DO NOT use either of these functions.**

To cancel auto-login, on title bar, click  → “**Logout**” to return to login page, and this function is cancelled.

D. Retrieve the Forgotten Password

3PS Network Server can send the password of the User's account to the saved email address. To have Users be able to use this service, please make sure (1) the SMTP settings have been configured (refer to [How to Setup SMTP Settings for Event Rules](#) on page 77) and (2) a valid email address has previously been saved in **Setup** page → **Users** tab → User list.

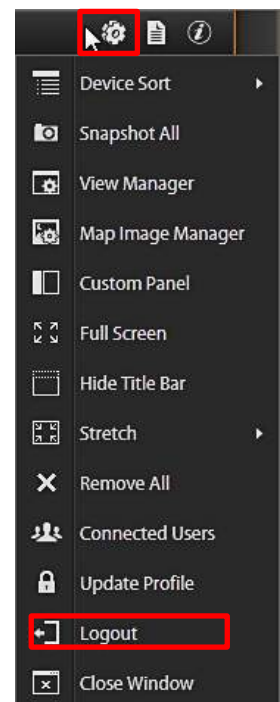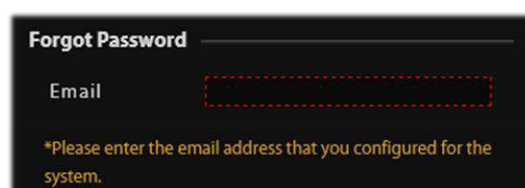The 'Forgot Password' window. It has a title bar that says 'Forgot Password'. Below the title bar, there is an 'Email' input field. Below the input field, there is a message: '*Please enter the email address that you configured for the system.'.

The email address input in **Forgot Password** window should match the one under your User account saved in 3PS Network Server.

Access 3PS Network Server via 3PS Network Server

Workstation


3PS Network Server Workstation includes a set of programs that provide interface between users and the 3PS Network Server. It may be installed on the same PC as the 3PS Network Server, or they may be installed separately and connect to 3PS Network Server via network.



Double-click the shortcut icon on your desktop to execute this workstation application.

Login

Fill in the following fields then click “**Login**” to log in to the system. The login process of Workstation is very much the same as that of Web browser:

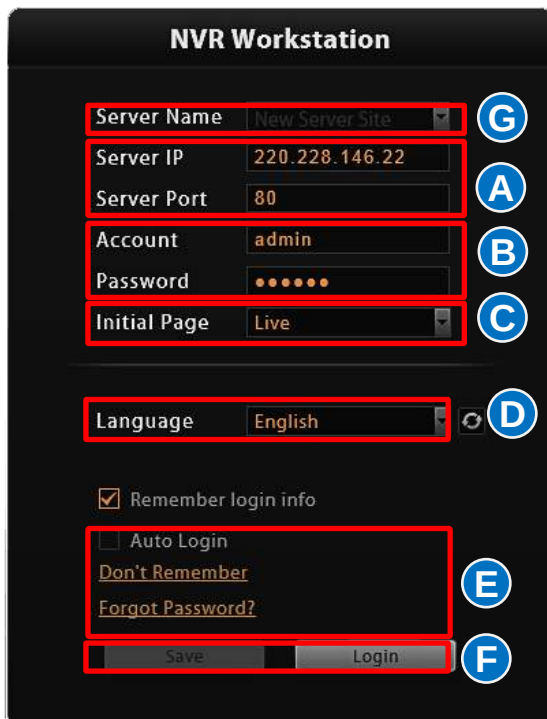

A. Server IP & Server Port

In **Server IP** field, key in **localhost** or **127.0.0.1** if 3PS Network Server Workstation is on the same computer with 3PS Network Server. If you are connecting from another computer, please input the ip address of server computer, for example: **220.228.146.22**.

In **Server Port** field, key in the port number (default is 80).

B. Enter Account & Password


Account (non case-sensitive)

admin (default)

Password (case-sensitive)

123456 (default)

C. Choose the Initial Screen



3PS Network Server 3.0 user interface consists of three main module screens: **Live View**, **Playback** and **Setup**, you may choose one where you would like to enter after logging in. Default is **Live View** screen.

D. Language


Choose a UI language from drop-down list.

E. Remember Login Information

To have **3PS Network Server Workstation** remember the **Account**, **Password**, your choices of **Initial Page** and UI **Language**, simply check **"Remember login info"**. Click **"Don't Remember"** will clear your input text and reset to default.

To directly enter the desired page every time you log in from this PC , check **"Remember login info"** then **"Auto Login"** to skip the Login page. **If your computer may be accessed by someone else, you might consider not to use either of these functions.**

To cancel auto-login, on title bar, click  → **"Logout"** to return to login page, and this function is cancelled.

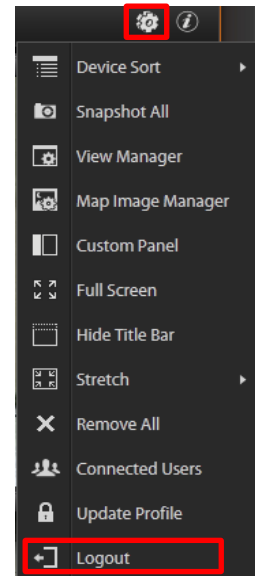


F. Retrieve the Forgotten Password

Please refer to D. Retrieve the Forgotten Password on page 31.

G. Server Name/Server Sites List

3PS Network Server Workstation can remember multiple server sites and their login settings and show the site lists on **Login** window. To add a new site:

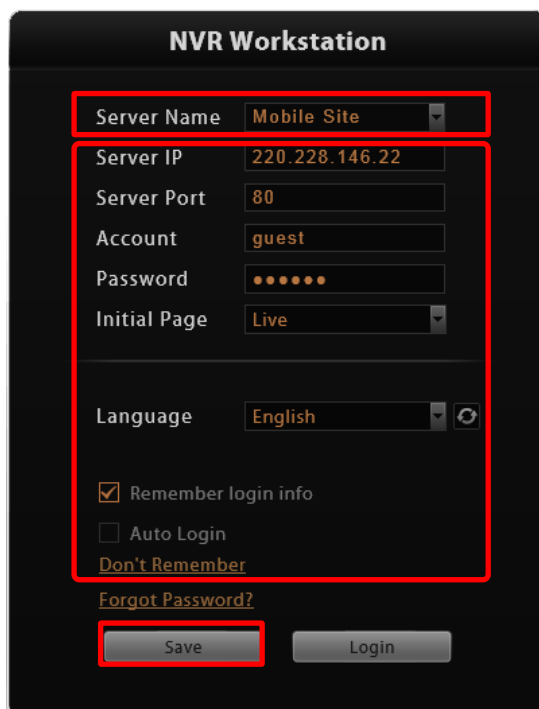

NVR Workstation

Server Name: Mobile Site

Server IP: 220.228.146.22

Server Port: 80

Account: guest

Password: •••••

Initial Page: Live

Language: English

☒ Remember login info

☐ Auto Login

[Don't Remember](#)

[Forgot Password?](#)

Save **Login**

1. Click in the **Server Name** box and input the server site name.
2. Fill in the other fields. If you disable the **"Remember login info"**, then only the **Server Name**, **Server IP** and **Server Port** of this server site will be remembered.
3. Click **"Save"**
4. After a server site is saved, it will be shown on **Server Name** dropdown list. You may click on its name to enter its Login window or  to delete it from the list.




5. You can export the saved server sites, or import it to another Workstation client computer. Access 3PS Network Server via **3PS Network Server Workstation**, go to **Setup** page → **System** tab → **Workstation**.

A. Export current server sites list

Click “**Browse**” to select a folder to save the list, and then click “**Export**”. This file will be saved as an *.xml file.

B. Import a server site list

Click “**Browse**” to select the *.xml file, and then click “**Import**”. The server sites will appear in **Server Name** dropdown list on **Login** window of your next login.

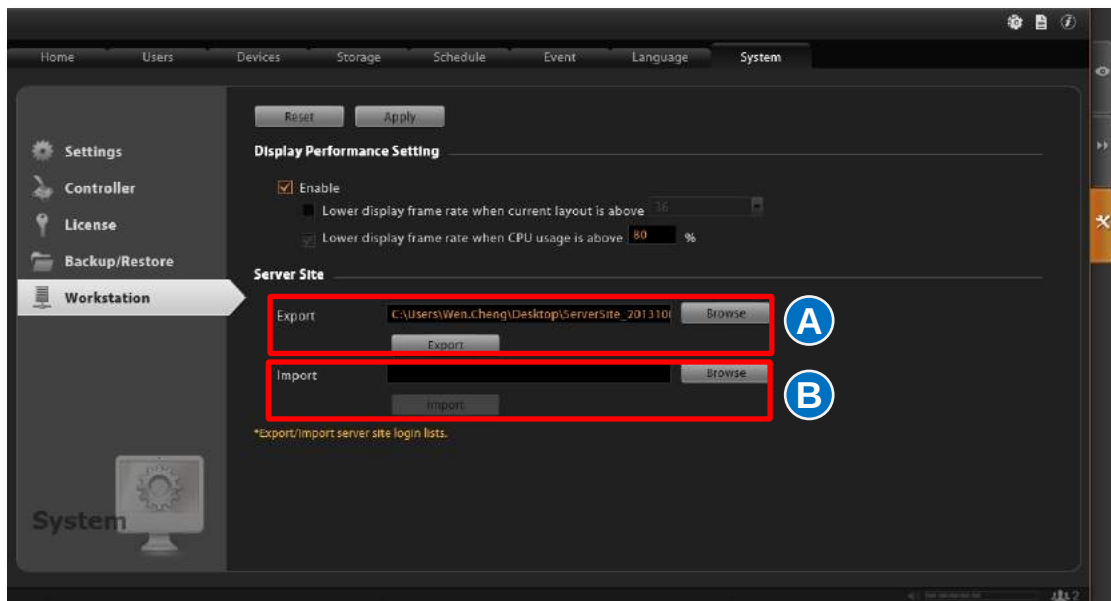


Set up the System

This chapter will guide you through everything you need to know in System Setup procedure from first time connection with 3PS Network Server 3.0 to general system configuration.

Setup Wizard


Once you connect to 3PS Network Server 3.0 for the first time, **Setup Wizard** will guide you through the initial setup process. You may click “**Previous**” or “**Next**” button located on the lower right at any time. This will skip the current step so that you may come back to it later. All the settings in the **Setup Wizard** are available in the **Setup** page.

To skip this wizard, click the bubble “**Done**” on top right corner.

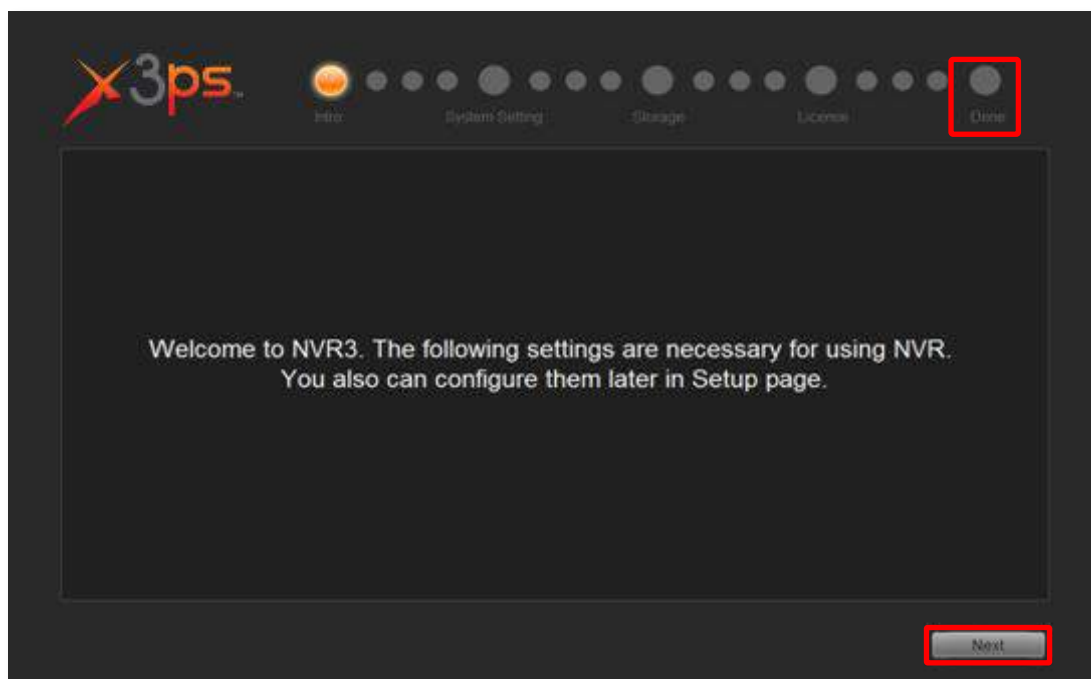

System Settings

You can adjust the Email & SMTP settings, FTP settings for event rules now or later. For more details about the settings, please refer to [How to Setup SMTP Settings for Event Rules](#) on page 77 and [How to Setup FTP Settings for Event Rules](#) on page 78.

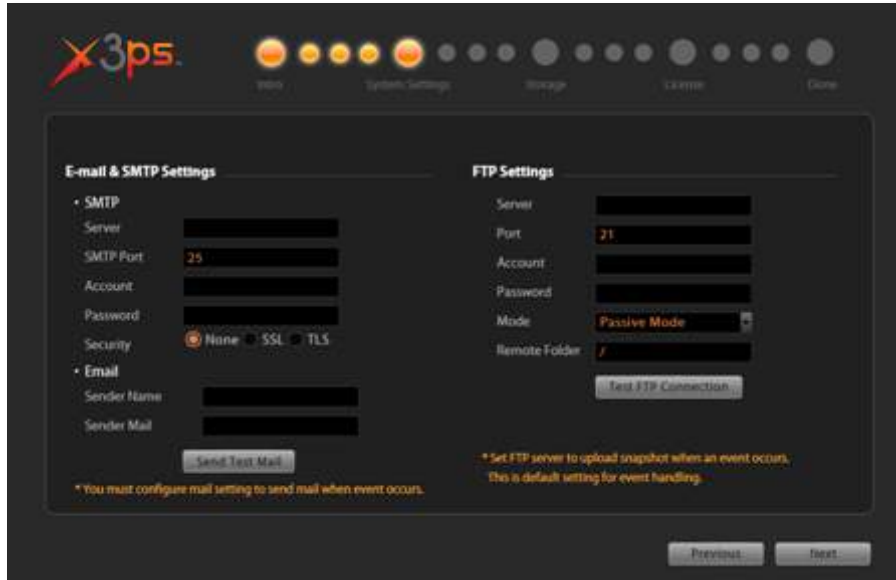

The screenshot shows the 'System Settings' window with two main sections: 'E-mail & SMTP Settings' and 'FTP Settings'.

E-mail & SMTP Settings:

- SMTP:**
 - Server: [Empty]
 - SMTP Port: 25
 - Account: [Empty]
 - Password: [Empty]
 - Security: ☒ None ☐ SSL ☐ TLS
- Email:**
 - Sender Name: [Empty]
 - Sender Mail: [Empty]

Buttons: 'Send Test Mail', 'Test FTP Connection'.

FTP Settings:


- Server: [Empty]
- Port: 21
- Account: [Empty]
- Password: [Empty]
- Mode: Passive Mode
- Remote Folder: /

Footnote: * Set FTP server to upload snapshot when an event occurs. This is default setting for event handling.

Navigation: Previous, Next

Storage

On 3PS Network Server, you may choose which disk drives to store the recording files, and decide how much memory space is left for all computer applications to run. You must configure the **Drive** and **Reserve Space** for recording. **Reserve Space** is the space on the drive that will not be used to save recording files, the deletion of earliest recording files will be performed if available space has decreased to reach below **Reserve Space** configuration; you may choose one or multiple disk drives in **Disk Drive List** to save the recordings. If you skip this step, **Drive C** will be the default drive. For more details about the settings, please refer to [Storage Management](#) on page 83.

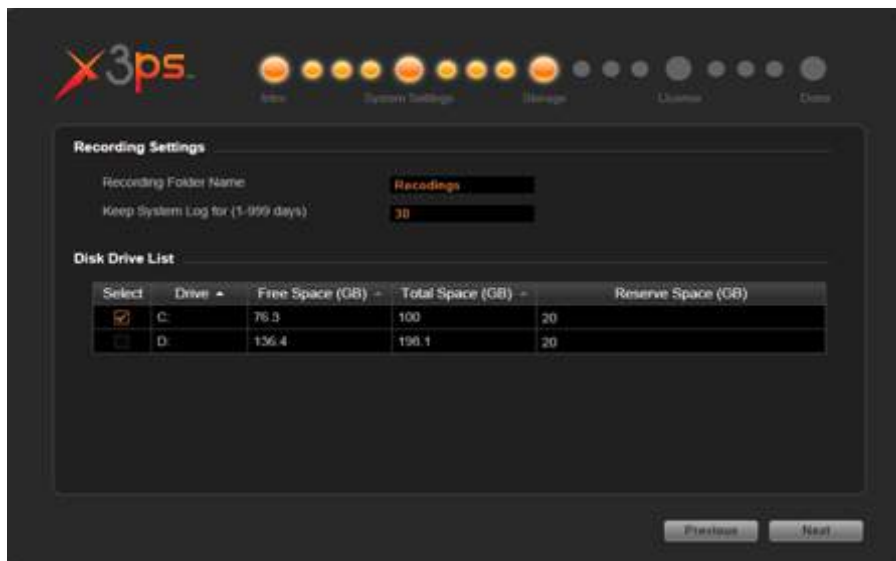

The screenshot shows the 'Storage' window with two main sections: 'Recording Settings' and 'Disk Drive List'.

Recording Settings:


- Recording Folder Name: Recordings
- Keep System Log for (1-999 days): 30

Disk Drive List:

Select	Drive	Free Space (GB)	Total Space (GB)	Reserve Space (GB)
☒	C:	76.3	100	20
☐	D:	136.4	198.1	20

Navigation: Previous, Next


Licensing

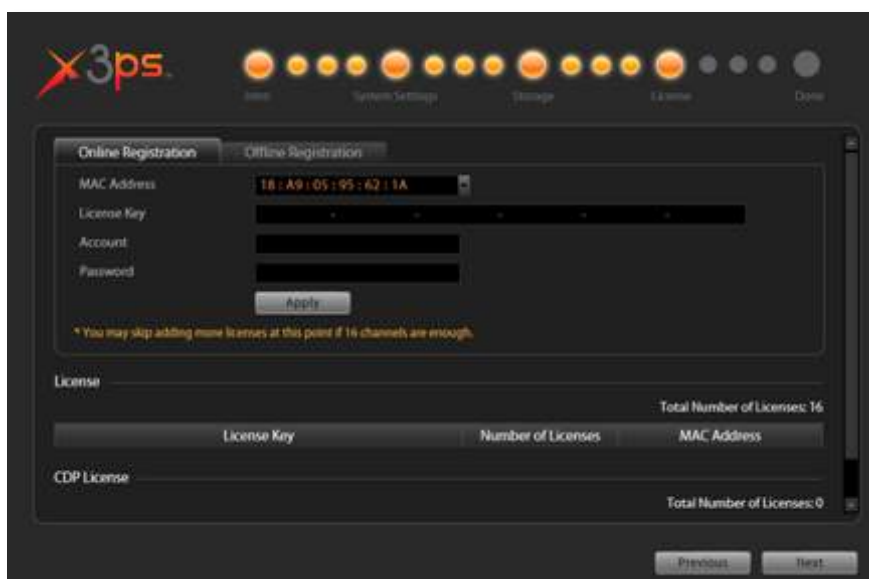

This is the license management section. On lower right part of screen shows number of channels allowed under your current license. Each new device has a license for **16** channels which is already activated. You can click “**Next**” to next setting if you do not want to add new license for now. For more details about the settings, please refer to License and Activation on page 22.

The End of Setup Wizard


Click “**Done**” to complete **Setup Wizard**, the previous configuration steps you have gone through are available in **Setup** page.

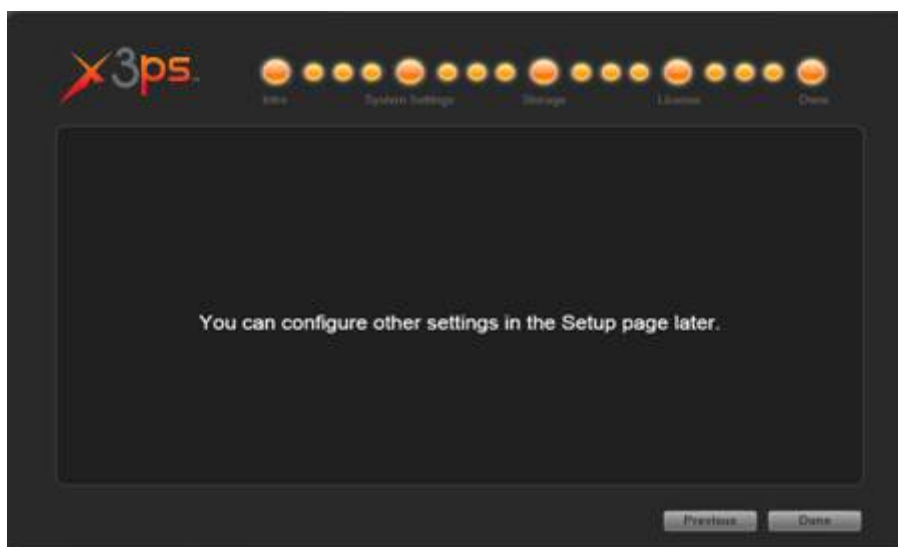

3PS Network Server Main Screen


You will enter the live view screen after **Setup Wizard**. On the right are link buttons to three 3PS Network Server major functions: (1) **Live view**, (2) **Playback** and (3) **Setup**. You can click the orange button to enter the function page.

Live View

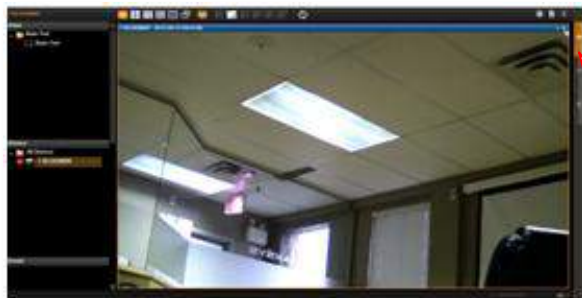


In this module, you can see live view from cameras, perform PTZ operations with mouse or Joystick, view system log, receive alerts on the event panel, setup view layouts, perform manual recording or take a snapshot.

Playback

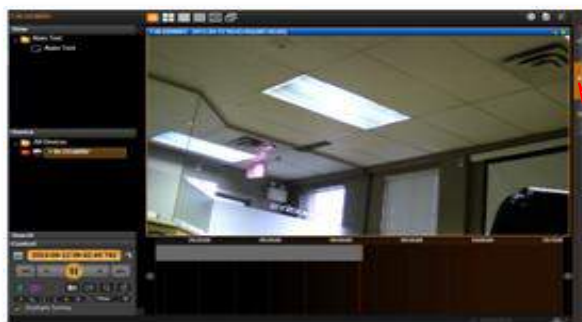

You may find and playback existing recordings in this module. Up to 24 channels can be played synchronously. Snapshots or video segments can be taken from playback files. Recorded files can also be exported to AVI format here.

Setup

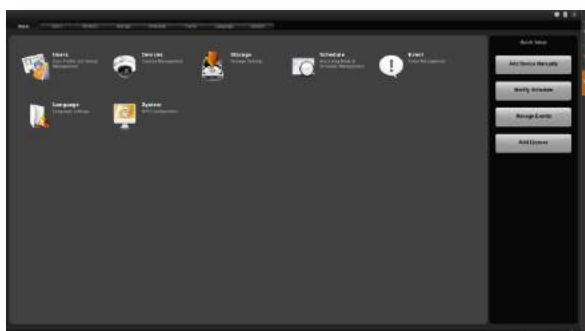

This module includes user setup, device setup, event setup, schedule setup and system-wide settings.


Add Devices

Cameras or video encoders are the fundamental building blocks of surveillance systems. To manage cameras from 3PS Network Server, you have to add camera devices into 3PS Network Server system first.


In this section, we will guide you through how to add or delete devices on 3PS Network Server system.

To start adding new devices, please follow steps as below:


1. On **Setup** page→**Home** screen, click “**Device**”.

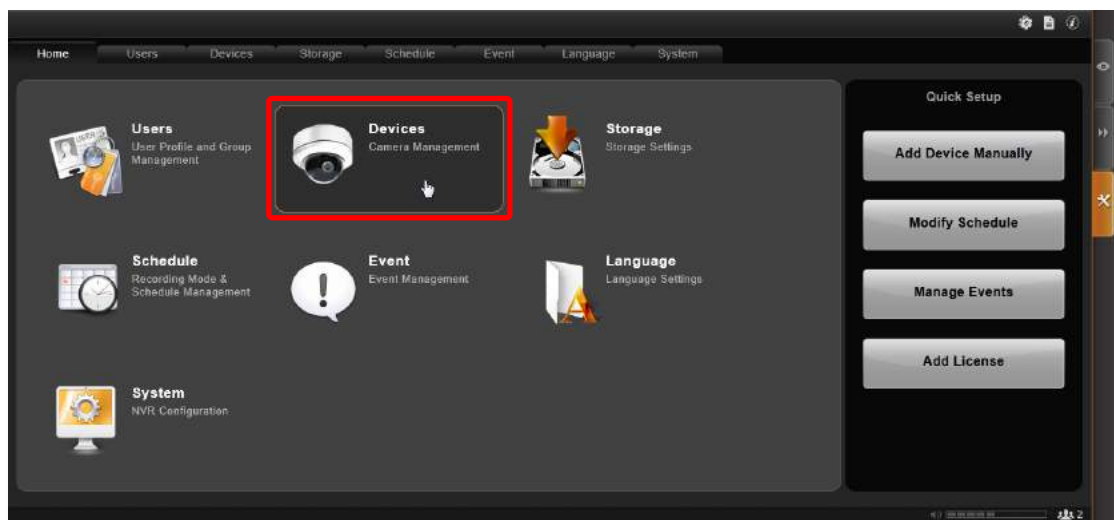

2. On **Devices** page, the **Device List** is currently empty, and you need to add some video sources to it. Now click “**Add Device**”.

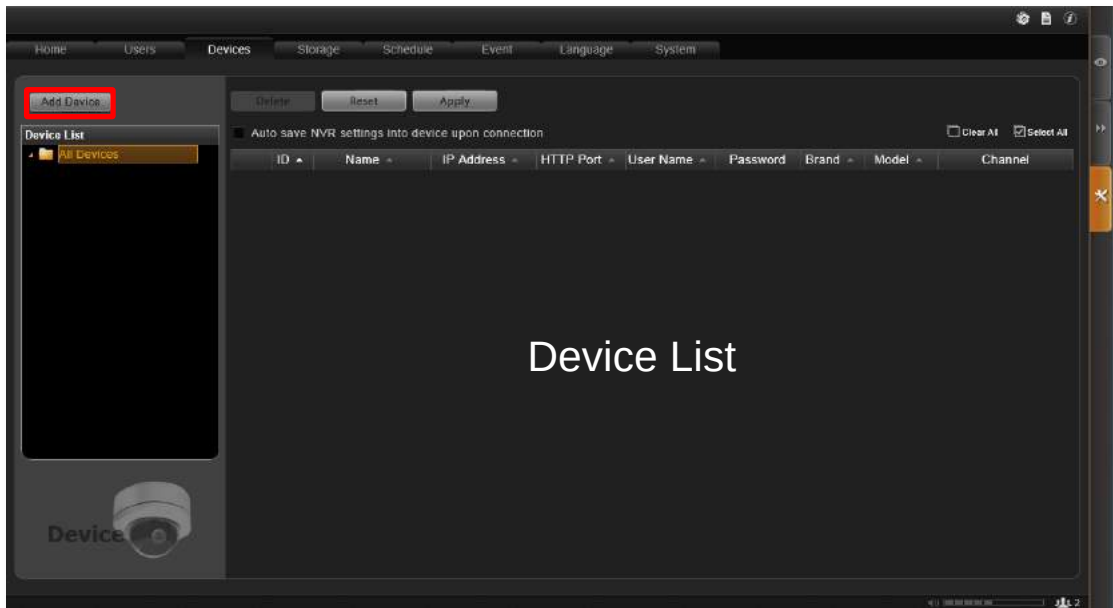


3. There are two ways to add devices into the system, **Search Devices** and **Add Device Manually**. Use **Search Devices** to auto search your cameras located in the same subnet with your 3PS Network Server. If your cameras / video encoders are located outside of local subnet or over WAN, please do it by **Add Device Manually**. You need to know the IP address of the device to add it manually.

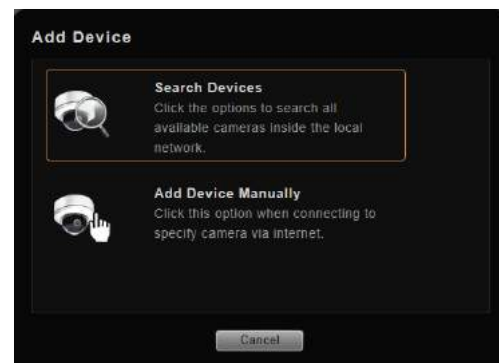

Search Devices Within Local Area Network

- A. Select "**Search Devices**". Once the search is completed, a list of available devices will be shown. You click on the title header to sort by that column. Click the header again to sort in the reverse order.

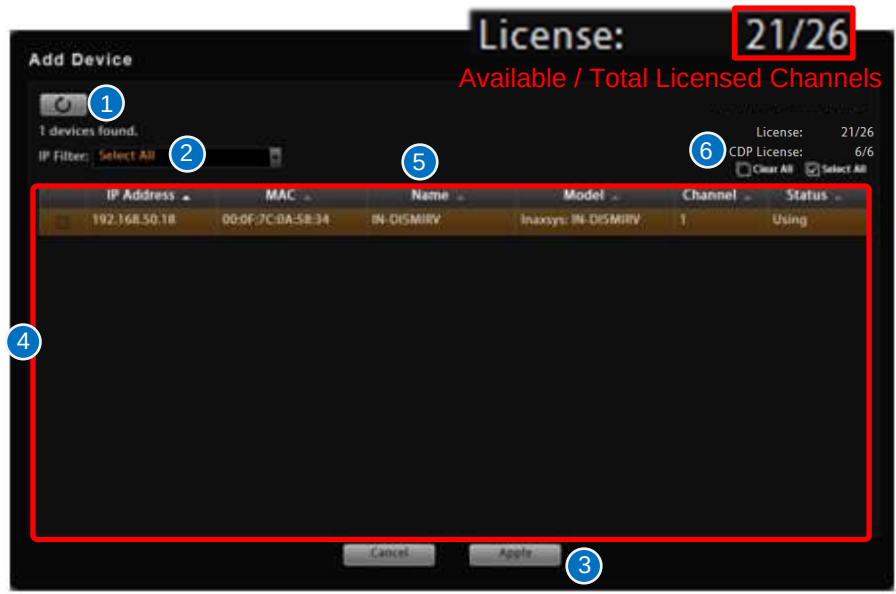


1. Refresh
2. IP filter (for multiple networks)
3. Available / Licensed channel
4. Search result
5. Column title
6. Available / Total Licensed Channels

B. Select the row of the camera you wish to add to the system and repeat this step until you have checked all the devices you need.

C. Click “Apply” to add selected devices into 3PS Network Server system.

Add Devices on WAN or Other Local Area Networks


1. After selecting “**Add Device Manually**”, camera setting page will appear as below. The most important settings are (1) Protocol, (2) Camera IP, (3) HTTP Port, and (4) User Name & Password. Please fill in these fields required for 3PS Network Server to communicate with the device.

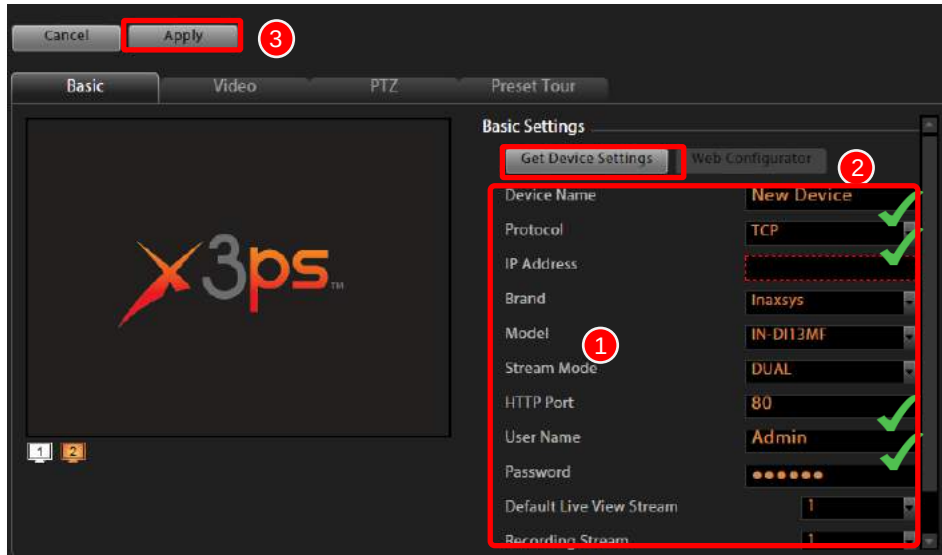

Important Notice

If any of the said fields is incorrect, 3PS Network Server will not be able to connect the device. When you have any device connection problem, please check these settings. However, at this point, you may skip filling in the Device Name, Brand, Model, and Stream Mode configuration.

2. Click “**Get Device Settings**” to have 3PS Network Server contact the device and get the live view. Once connected to the device, 3PS Network Server will get all the device properties such like **Brand**, **Model**, **Device Serial Number**, **Firmware Version**. If the device supports dual stream, **Stream Mode** selection field will reveal, you may select different streaming mode and configure relative options. You may click “**Cancel**” button on the top to abort setting this device or “**Apply**” to save it.

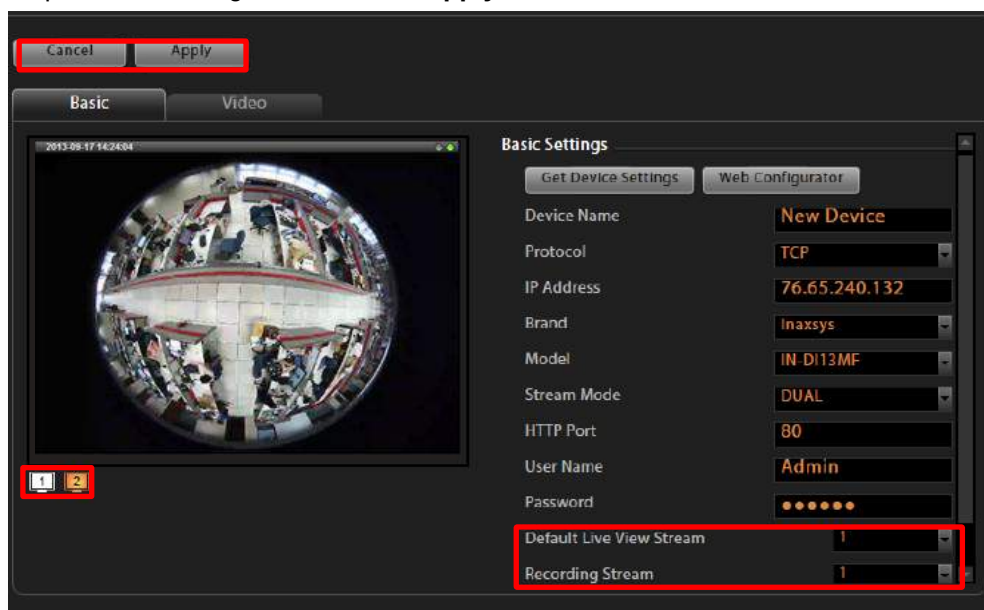

- To directly access the device configurator webpage, simply click "**Web Configurator**" on top right to open it. Certain detailed settings are only through the web configurator and not through 3PS Network Server.

Basic Settings Attributes

Field Name	Description
Device Name	Enter the name of the camera, which will be shown in the Device list on the left in Live View. This name should be descriptive so that you know where the camera is located.
Protocol	Select a streaming protocol to connect the camera with. You may choose between TCP, RTP or HTTP.
IP address	Enter the camera's IP address or host name.
Brand	Select the manufacturer of device.
Model	Select the device type of the IP cameras / video servers. In most cases, this is automatically filled in when you perform Get Device Setting , and you do not need to worry about it.
Stream Mode * ¹	Select one of the streaming modes this device supports.
Channel No. * ²	The channel ID you set for a multi-streaming device.
HTTP Port	Enter the HTTP port for IP cameras/ video servers. Most cameras use the default port number of 80.
User Name	Enter the user name to log in the camera.
password	Enter the password to log in the camera.
Default Live View Stream * ³	Choose the streaming id for Live View. Default is stream 1 .
Recording Stream * ³	Choose the streaming id for Recording. Default is stream 1 .
Connection Timeout(0~99 secs)	Enter the amount of time without response for 3PS Network Server to consider the device to be disconnected (in seconds). We recommend you to set different values for different types of connection. The default setting is 5 seconds. For devices located over the WAN, you may wish to increase this value to allow for occasional Internet lags.


*¹ Available when connected to a multi-streaming device.

*² Available when connected to a multi-streaming device in the mode of concurrently outputting streams for multiple live view channels.

*³ Available when connected to a multi-streaming device in Dual Stream mode.

Device Status

To validate if you have successfully added a device to 3PS Network Server system, simply check the **Device List** on the left of **Setup → Devices** tab to see if the device name appears in the tree. Point your mouse cursor over the device icon will bring up an information box containing the device's **IP Address**, **HTTP Port**, **Protocol** and device type.

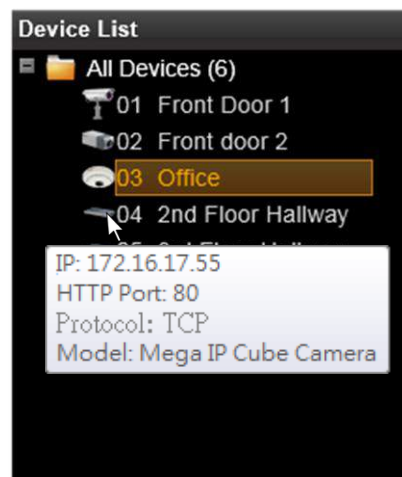

Status Icon Description


Icon	Status Description
	3PS Network Server cannot retrieve video streaming. This may be that a video server is not connected with cameras, or that the streaming is blocked by the firewall between the device and 3PS Network Server. Please (1) ensure the device side is well connected and can output video normally. (2) check the firewall and port forwarding settings.
	This device's settings have been modified but not saved yet. If you leave these modifications unsaved, they will not take effect by next time the server starts. Please always remember to save upon every change.
	3PS Network Server cannot build up connection with this device. Please check the device connection settings (including IP Address, Port number, Account Name and Password)
	This device is currently connected, video is being transmitted and no recording is proceeding.
	This device is currently connected, and video is being recorded either manually or according to the schedule.

Add Non-Inaxsys Cameras


In this section, we will guide you through how to add devices to 3PS Network Server system.

After the required CDP license is activated, please:


1. Use the utility provided by camera manufacturer to confirm the camera properties:
(1) **Protocol**, (2) **IP Address**, (3) **HTTP Port**, and (4) **User Name & Password**.
2. Log in to 3PS Network Server, go to **Setup** page→ **"Device"** tab, click **"Add Device"**, and select **"Add Device Manually"**.

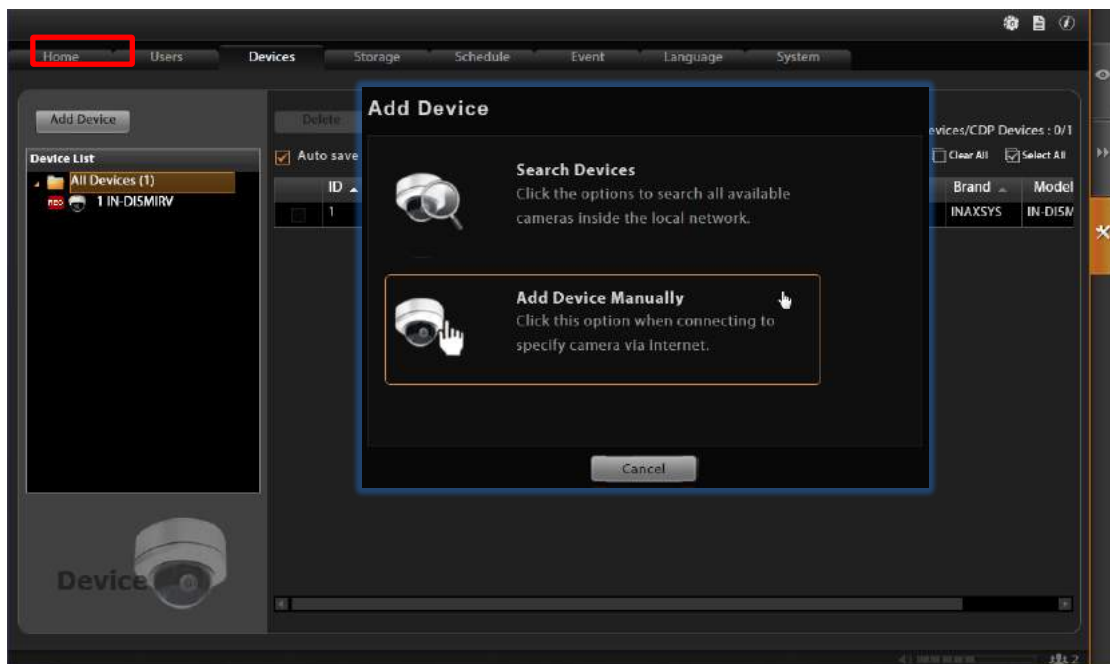

3. After selecting **"Add Device Manually"**, camera setting page will appear as below. Please fill in the below **seven** marked fields that are required to communicate with the device - **Protocol**, **IP Address**, **Brand**, **Model**, **HTTP Port**, **User Name** and **Password**, and then click **"Apply"**.

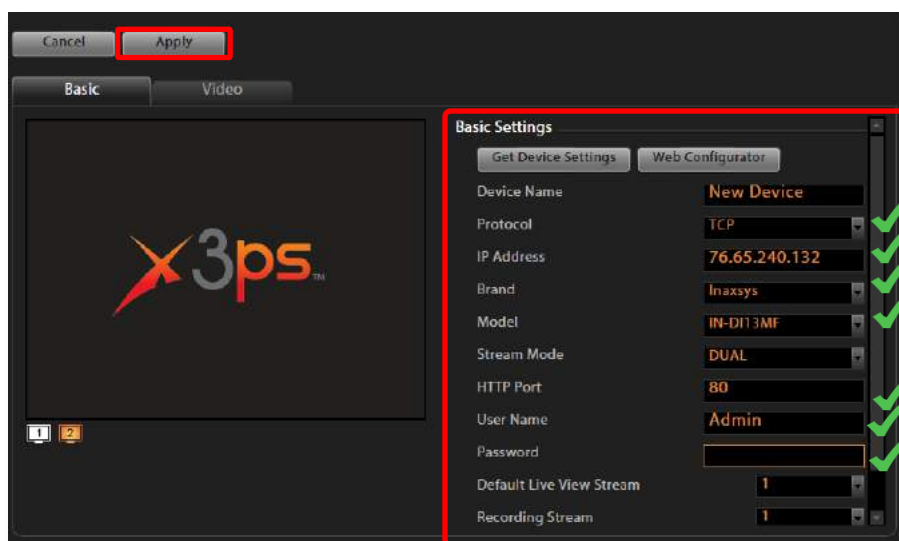

- By applying the settings, 3PS Network Server will get the video stream, and this camera is successfully added to 3PS Network Server system. You may click **Video**, **PTZ**, or **Preset Tour** (available for cameras with zoom/pan/tilt capability) tabs to configure other properties.

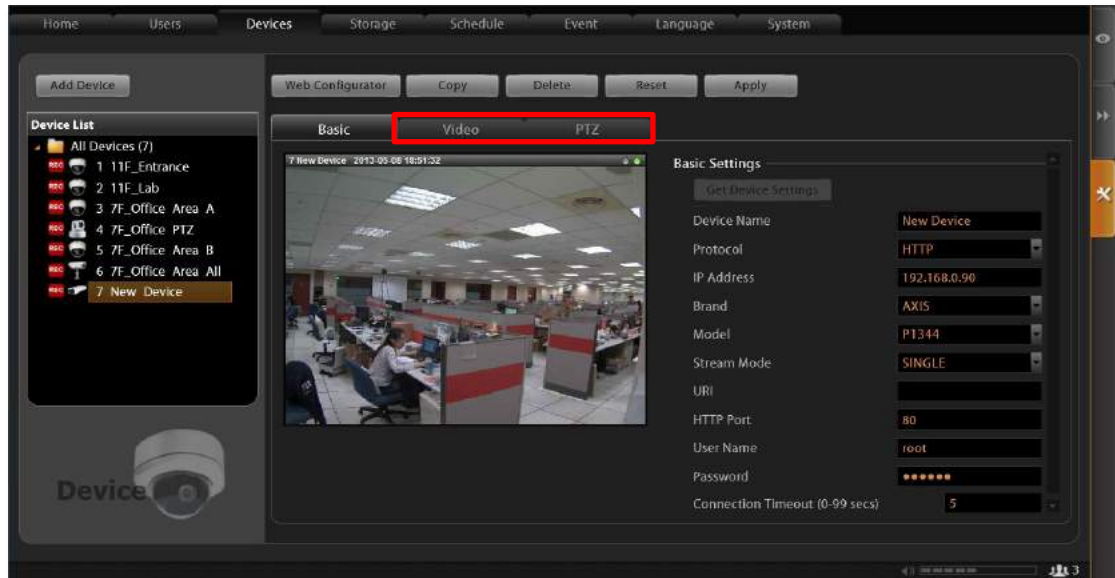


- To directly access the device configurator webpage, simply click **“Web Configurator”** on top left to open it. Certain advanced settings are only available through the web configurator and not through 3PS Network Server.

Manage Multiple Devices

After adding several devices to the system, you may get an overview of all devices on **Setup** page → **Device** tab; this is where you may use certain fast and convenient approaches to manage a number of devices. In this section, we will guide you through how to quickly add or delete multiple devices.

Modify Basic Connection Settings

Go to **Setup** page → **Devices** tab, and click **All Devices** in **Device List** to get the devices overview in right column. Each basic connection setting field including Name, IP Address, HTTP Port, User Name and Password, is editable. Simply click in the field to modify it directly.

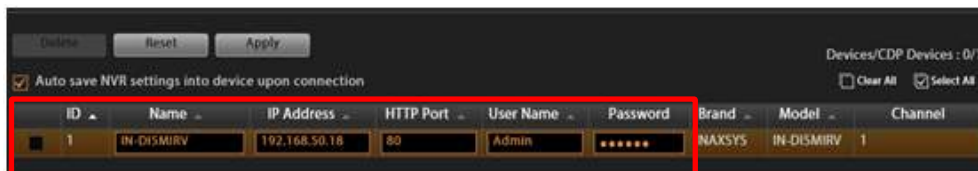


Every time you modify a property without saving it, an icon  will appear next to the device in **Device List**. You may click “**Reset**” to retrieve the settings you saved last time once you want to abort current modification. After changing any field, please remember to click “**Apply**” before you leave this page.



Tip

3PS Network Server will sync with devices upon connecting to them. To make sure the settings on 3PS Network Server side are prior to and always overwrite those on device sides, please check “**Auto save NVR settings into devices upon connection**”.

Delete Devices


You may delete a single, multiple or all devices on **All Devices List**. The logs and video files of the devices will be kept until deleted by server storage deletion rule. Select the device(s) you wish to delete, click “**Delete**” button and confirm the deletion. If you want to delete all the existing devices, simply click  on upper right to select them all at once. To validate if you have successfully deleted a device on 3PS Network Server system, simply check the **Device List** on the left of **Setup** page → **Devices** tab to see if the device name is removed from the tree.



Copy Settings Across Devices

When setting a large number of devices, many settings will resemble other ones, and it is

sometimes tiresome to repeat every setting again and again. You can use the **Copy** function to save the hassle of needless repetition.

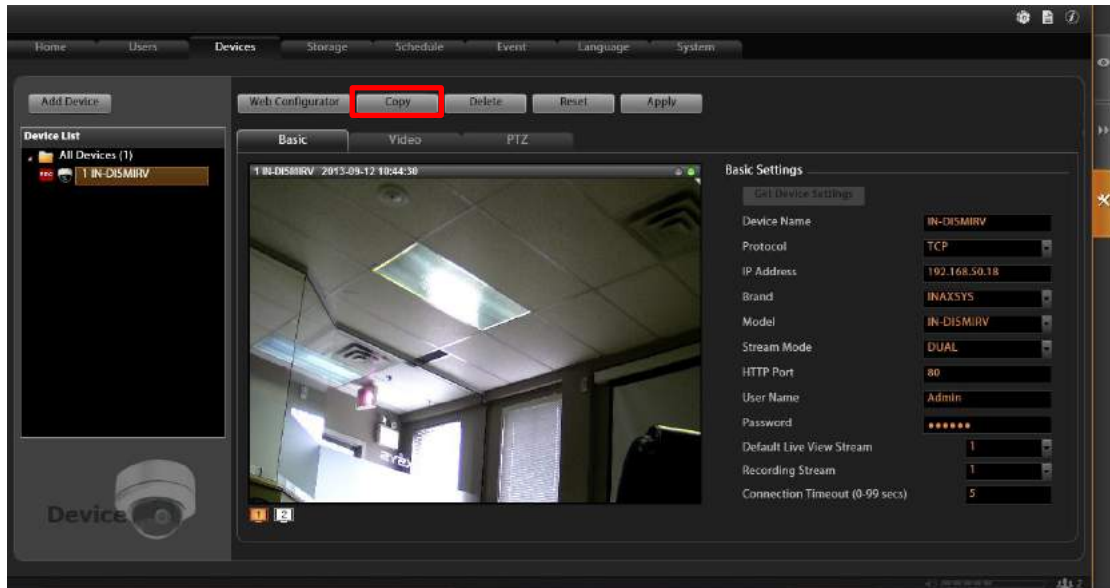

1. On **All Device List**, select the source device whose settings are to be copy from. You can select only one device to be the source.
2. Click **“Copy”** to bring up the copy setting window.
3. On the window, below the source device name are the settings you may choose to copy, including **Basic settings**, **PTZ Settings** and **Video Settings**.
4. Click **“Apply”**, the settings will be written to target devices.
5. To add a new device with the same settings, choose **“Add New Device”** in



Target Device area, and then click **“Apply”** to go to a new device page. Each field on this page has already been filled with the source device's properties. You may continue to modify the **Device Name**, **IP Address**, get the live view by clicking **“Get Device Settings”**, and then click **“Apply”** to add this device to **Device List**.

6. There are a few differences of the copied items between two target device types:

Settings Copied to Target Devices

Target Type Settings	New Device	Existing Device
Basic	All	All except Device Name , IP Address , HTTP Port , RTSP Port , User Name and Password
Video		All except Motion Settings , Video Adjustment
PTZ		All except PTZ Preset Points and Commands

Note

1. You can only choose either “**Add New Device**” or existing devices as target.
2. To add new devices by copying from an existing one, the user's group should be permitted with this right. To check the access rights, please go to **Setup** page→**Users** page→**User Groups**, select the user group, and enable the “**Device Setup**” -“**Add New Device**” under **NVR Permissions**.

Add Video Streams from a Multi-channel Device

There are devices that output more than one video streams to 3PS Network Server. For example, a video encoder converts a number of analog video signals into the same amount of IP video streams; certain high megapixel cameras such as Inaxsys IN-BO2MIR22A, supports outputting multiple VGA streams cropped from a single high-resolution video source. These multiple streams come from a single device are managed as different cameras by 3PS Network Server.

To add these streams as multiple channels for you to view and record, please:

1. Select the desired stream mode in “**Stream Mode**” field on **Setup** page →**Devices** tab→**Basic** tab.
2. The “**Channel No.**” column will display for you to input the stream ID (the same with your setting in device's web configurator).
3. After configuration, click “**Apply**”.
4. Go to **All Devices** page, duplicate this device to a new channel, repeat this step until all the channels you need are added.
5. Individually modify the **Channel No** value of the channels.



Tip

Saving CPU loading with Your Dual Streaming devices


The device supporting dual-streaming function can output two video streams of different value. You may make the live view stream smaller in size with lesser frame rate to save decoding CPU power and bandwidth. Meanwhile the recording stream can be larger and have more FPS so that you have clear images when you need to retrieve evidence. For settings in both streams of devices with dual stream functionality, please refer to section Configure Video Format_on page 50

Configure Device Settings

After adding a device to 3PS Network Server, you may continue to configure its video, motion detection, PTZ or preset tour settings on **Setup** page→**Devices** tab. In this section, we will guide you through how to configure these settings and their corresponding functions.

Configure Video Format

Go to **Setup** page →**Device** tab, select a device from **Device List**, and then go to **Video** tab to configure the video format of the stream output from this device. If the device is currently in Dual Stream mode, you may switch the stream in live view window by click on the switch below  and configure individual settings for Media 1 and Media 2.

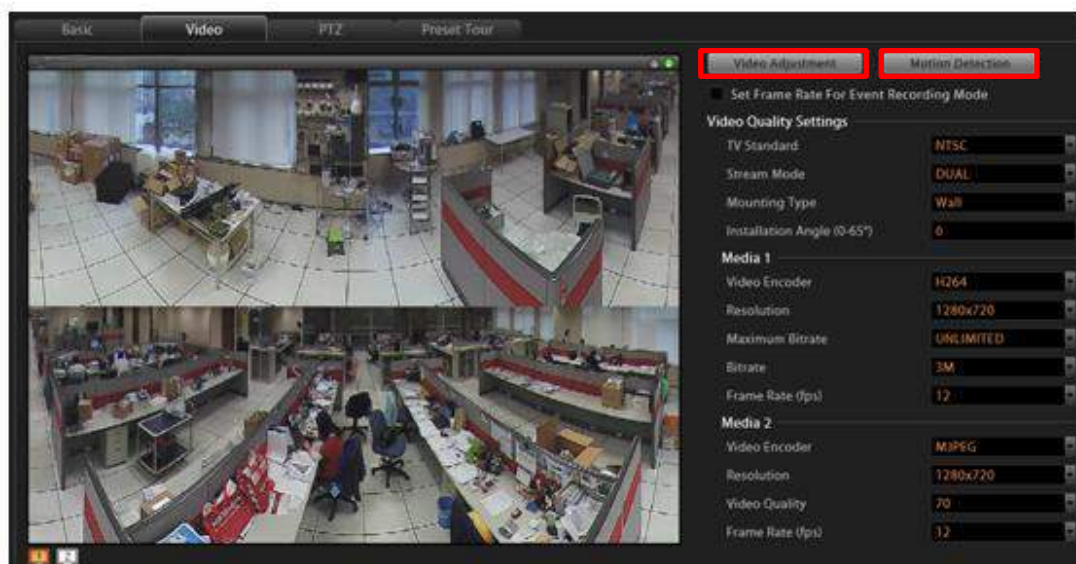

Video Settings Attributes

Field Name	Description
TV Standard	Default is NTSC
Stream Mode*¹	Select one of the streaming modes this device supports
Mounting Type*²	Select the mounting position
Installation Angle*³	Input the angle for a device mounted on the wall
Video encoder	Select one of the codec this device supports
Resolution	Select one of the resolutions this device supports
Video Quality*⁴	Select your desired video quality of the image
Frame Rate(fps)	Select the (Frames Per Second) this device supports.
Maximum Bitrate	This puts a hard cap on the maximum bit rate allowed in any given second of streaming. Assigning a limited bit rate may cause a few dropped frames when the stream data overflows the allowed bit rate.
Bitrate*⁵	This is the target bitrate that the camera will attempt to provide when

you have selected **"Unlimited"** for **Maximum Bitrate**. The actual value will fluctuate slightly based on scene changes.


- *¹ Available when connected to a multi-streaming device.
- *² Available when connected to a hemispheric device.
- *³ Available when connected to a hemispheric device whose **Mount Type** is set to **"Wall"**.
- *⁴ Available when "Video Encoder" is selected as MJPEG.
- *³ Available when "Maximum Bitrate" is selected as "Unlimited".

Save Storage by Setting Event Recording Frame Rate

Video surveillance system is aimed to preserve as much evidence as possible, and you may want to have a view be recorded 24/7 to capture every important moment; however, the general recording methods provided by most network recording systems- event and schedule recording, will either consume too much storage or have risk in missing important scenes. The **"Set Frame Rate for Event Recording Mode"** function record everything at economical storage usage by automatically adjusting video frame rate during event recording period.


Schedule Recording

Continuous recording promises no loss of video evidence; **however, large data storage is required** because this video is always recorded at the high frame rate you set for device.

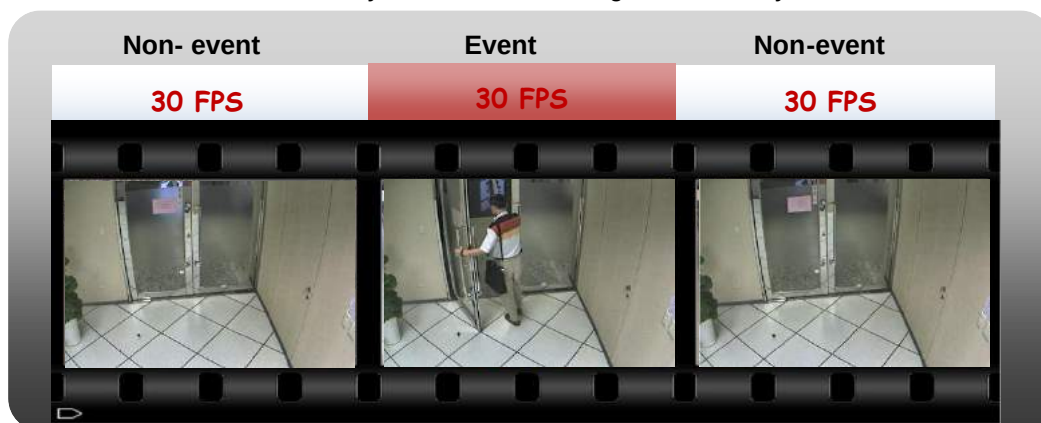


Event Recording

This mode is storage-efficient because recording would stop during the non-event moments; while **certain vital video evidences may be missed** if the triggering device fails to take effect.

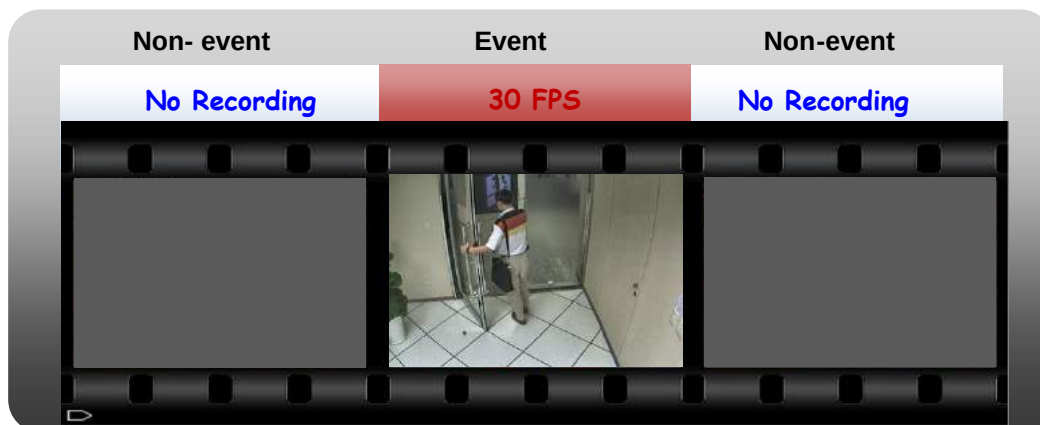


Event Recording with Frame Rate Adjustment

Keeps recording all the way without losing any single moment; lower frame rate can be set for non-event recording, which consumes only a little storage.

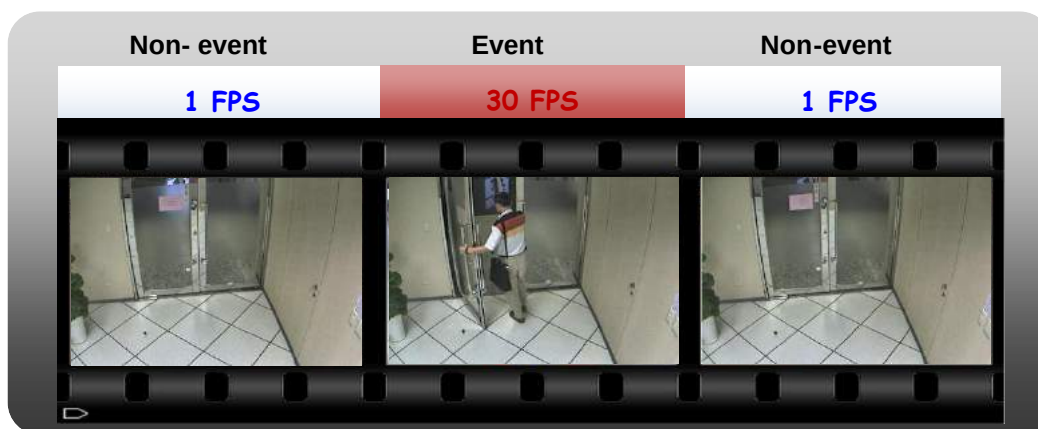

How to Make Use of Event Recording with Frame Rate Adjustment

To make use of **Event recording with Frame Rate Adjustment function**, you may configure the **Frame Rate** settings on **Setup** page → **Device** tab → **Video** tab. The **Frame Rate (fps)** you set will always be applied to live view and schedule recording. Once **Set Frame Rate for Event Recording Mode** is checked, you may configure advanced settings for event recording. If the device is in **Dual** stream mode, you will only need to configure these settings of the **Recording Stream**.

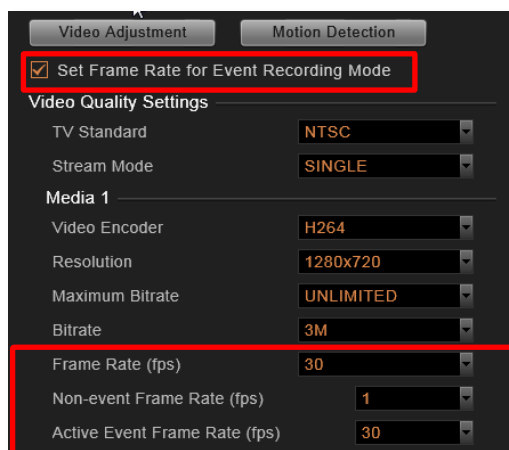

Scenario A:

Suppose you wish all the videos are recorded at very high frame rate. With sufficient storage, you may not need this function. Set the video **Frame Rate** that will apply to all the recordings. In this way, 3PS Network Server 3.0 will not record non-event during event recording period.

Frame Rate Setting		Event Recording
☐ Set Frame Rate for Event Recording Mode		
Frame Rate (fps)	30	Non-Event: 0 FPS
		Event: 30 FPS

Scenario B:

Suppose you wish the system to recorded 24/7, the non-event recording to be kept at very low frame rate. Please set the event and schedule recordings at different frame rate, you will need to enable “**Set Frame Rate for Event Recording Mode**”, and set the “**Non-event Frame Rate**” and “**Active Event Frame Rate**”.


Frame Rate Setting		Event Recording
☒ Set Frame Rate for Event Recording Mode		
Frame Rate (fps)	30	Non-event:1 FPS
Non-event Frame Rate (fps)	1	
Active Event Frame Rate (fps)	30	Event: 30 FPS

Fine-tune the Image: Brightness/Contrast/Saturation/Hue

Not only details but also brightness, contrast, saturation and hue are essential factors to make images closer to real scene. For devices that support these property configurations, you may directly modify them and save to the device in 3PS Network Server 3.0 system.

To start, on **Device Video** tab, click “**Video Adjustment**”. Each field is only available when the device opens this property for modification. If the device is in Dual Mode, the video you get in this window will always be **Stream 1**.

1. At first, synchronize with the device to get the current settings by clicking “**Get Video Adjustment**”.
2. After retrieving the settings from device, the fields available for modification (depends on models) will be enabled. Select the desired value for the field.
3. Click “**Apply**”.

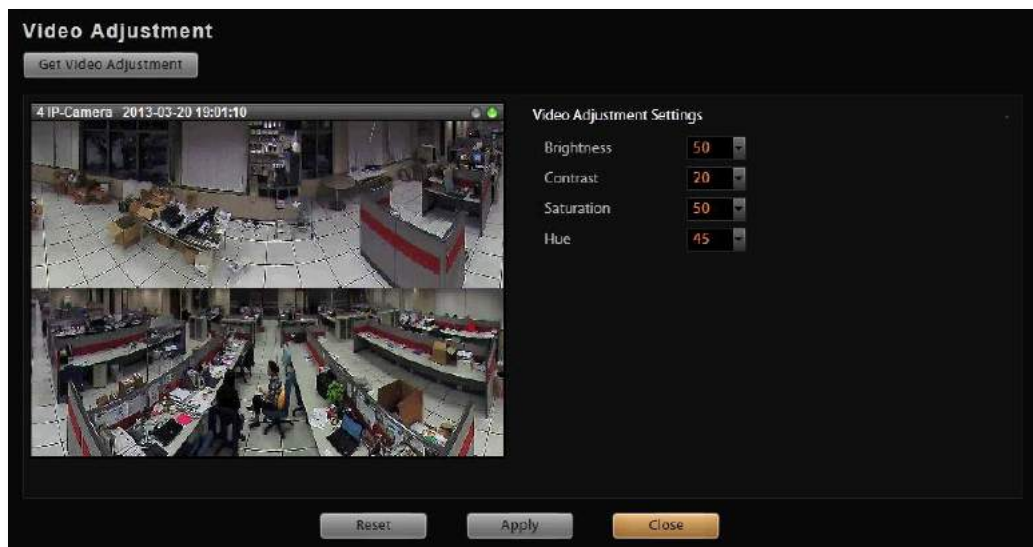

The screenshot shows the 'Video Adjustment' window. On the left, there is a live video feed from a camera, labeled '4 IP-Camera 2013-03-20 19:01:10'. On the right, under 'Video Adjustment Settings', there are four sliders: Brightness (set to 50), Contrast (set to 20), Saturation (set to 50), and Hue (set to 45). At the bottom of the window, there are three buttons: 'Reset', 'Apply', and 'Close'.


Video Adjustment Attributes

Field Name	Description
Brightness(1-100)	Defines how much portion of light and of dark appear in the image. As the value increases, the image appears brighter, and vice versa.
Contrast(1-100)	Defines the range level between light values and dark values. As the value increases, the separation between light and dark becomes more obvious.
Saturation(1-100)	Defines the level of the actual color intensity. As it increases, colors appear more pure; as it decreases, colors appear more gray-out.
Hue(1-100)	It is the term used to refer to the pure spectrum colors. Adjust this value to find the color closest to the real scene.

Configure Motion Settings

To make use of the motion and PIR detection functions supported by your devices, you need to configure the detection regions and settings. Once a motion is detected, 3PS Network Server 3.0 can trigger events and recording, bring up instant pop-up windows and show the detected area on live view.


Before configuring motion detection settings, first make sure you can connect properly to the IP camera / video server and get device settings. On **Device** tab→**Video** tab, and click “**Motion Detection**” to start.

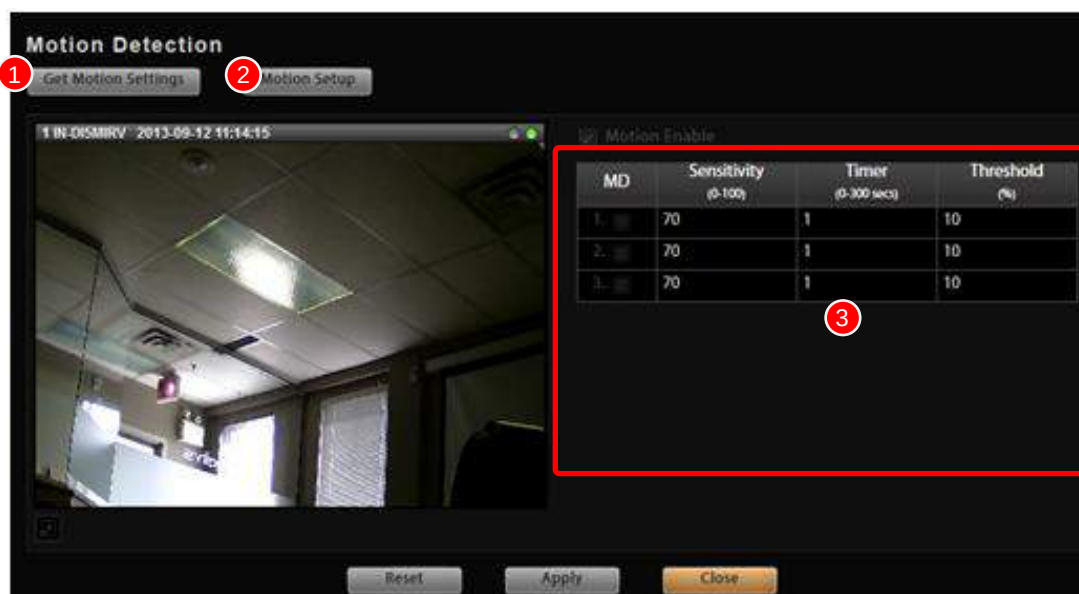

1. Click “**Get Motion Settings**” to retrieve the live view. For Dual Mode, the video you get in this window will always be **Stream 1**
2. Click “**Motion Setup**” to enable the property fields.
3. There are three motion regions for you to set. To enable one, check it in the **MD** box, a red frame will appear in the view. You may start setting the detection area by adjusting this red frame on the view. Simply use your mouse to move and resize the frame.

To move the entire frame

Place the mouse cursor over the **title bar**, and drag to move.

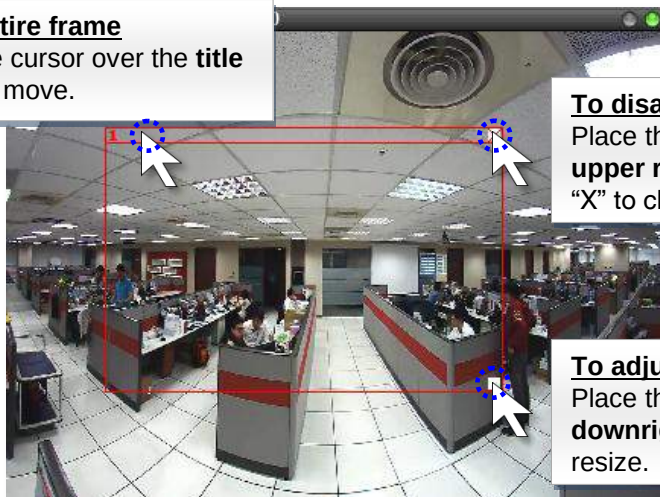

To disable this detection region

Place the mouse cursor over the **upper right corner**, and click the "X" to close this frame.

To adjust the region dimension

Place the mouse cursor over the **downright corner**, and drag to resize.

- When the setting is finished, click "**Apply**" to save, then "**Close**" to exit this page. To check or modify the regions you set, please go through clicking "**Get Motion Settings**", **Motion Setup**" and then "**Motion Enable**" buttons, the saved regions are already selected on the list, select one to proceed.

Adjustment Attributes

Field Name	Description
Sensitivity(1-100)	Determines how sensitive the camera reacts to the movement. The higher the sensitivity level is, the smaller motion will trigger the alarm, but may give false alarms. Default is 70.
Timer(0-300 secs)	The interval before the next motion detection can be triggered again. Default is 1 second.
Threshold (%)	The threshold level of this motion detection region. The lower threshold level is, smaller portion of the region would be considered as motions, which is more easily to be triggered, but may give more false alarms.

Note


- If you have changed the motion detection settings via the web configurator, please remember to come back to 3PS Network Server and press "**Get Device Settings**", then "**Apply**" to save to 3PS Network Server. This is to ensure that the settings in 3PS Network Server are always in sync with the device.
- If a motion region is set, once a movement is detected in this region, in live view:
 - (1) the red region frame will blink, and (2) a new alert entry will be generated in the event list.
- PIR detection is available only for models with this function.

Configure PTZ Device

PTZ devices can do panning, tilting and zooming automatically or through manipulation. The PTZ-related applications are broadly supported by 3PS Network Server 3.0. For example, you may control the movements of a PTZ camera with user interface panel controls or a joystick; the device can be programmed to execute a continuous tour or triggered by events to go to a preset position. Once an Inaxsys PTZ device is added to the system, 3PS Network Server 3.0 will use the default settings of the device model and enable PTZ functions, so that you may immediately start PTZ operations.

If you have previously changed the communication parameters of PTZ devices, please make sure these parameters on 3PS Network Server side and device side match.

Below is a list of functions supported Inaxsys solutions and the required settings. When you configure PTZ Protocol properties for Inaxsys Pan/Tilt/Zoom devices, please make sure the required settings are correct

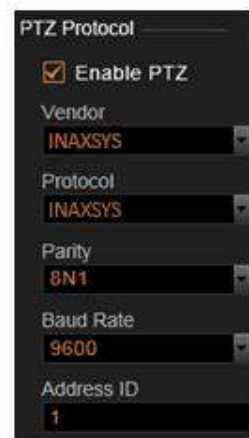

PTZ Protocol

- ☒ Enable PTZ
- Vendor: INAXSYS
- Protocol: INAXSYS
- Parity: 8N1
- Baud Rate: 9600
- Address ID: 1

Inaxsys Pan/Tilt/Zoom devices	Vendor	Protocol	Baud rate	Parity	Address ID
IP Zoom Camera/ IP PTZ Camera	V	V			V
IP Speed Dome / IP Camera mounted on Scanner/ Analog PTZ camera attached to Video Server	V	V	V	V	V

To start matching up the parameters, please follow the below procedures:

1. If the device is or a speed dome camera or an analog camera attached to video server, configure the parameters on physical device according to the product's installation instructions.
2. On the device's (camera or video server)web configurator, configure the parameters to match the setting on physical device, and test the PTZ operations to make sure the device is properly set to be connected
3. In 3PS Network Server 3.0, go to **Setup** page → **Devices** tab, select the device from **Device List**, and click **PTZ** tab. In **PTZ Protocol** section, fill in the communication parameters.

Adjustment Attributes

Field Name	Description																																								
Vendor	Vendor is the provider of Protocol. The selectable vendors would vary depending on different device models. Available vendor types are: INAXSYS, DYNACOLOR, PELCO and SONY.																																								
Protocol	Protocol is a set of rules to define the communication format between the device and controller. Different protocols are provided for selection according to the Vendor you choose. Available protocols following their vendors are: INAXSYS: [INAXSYS] / DYNACOLOR: [DYNACOLOR] / PELCO: [PELCOD] [PELCOP] SONY: [VISCA]																																								
Parity	Parity is the data validation mechanism for analog devices that use serial port interface to send or receive data. When choosing parity mode other than "none", the data packets will be validated for possible data losses so that failed command could be re-sent if necessary. Please refer to the parity setting of the analog device and choose exactly the same parity setting also in 3PS Network Server. When setting up Inaxsys Zoom, PTZ or Speed Dome cameras using “Inaxsys” protocol, you may ignore the parity setting. Available parity modes are: <table><tr><th>Parity mode name in 3PS Network Server</th><th>Serial data, represented by given amount of bits</th><th>Parity mode (none, odd, even)</th><th>Number of stop bits</th></tr><tr><td>8N1</td><td>8</td><td>N</td><td>1</td></tr><tr><td>8O1</td><td>8</td><td>O</td><td>1</td></tr><tr><td>8E1</td><td>8</td><td>E</td><td>1</td></tr><tr><td>8N2</td><td>8</td><td>N</td><td>2</td></tr><tr><td>8O2</td><td>8</td><td>O</td><td>2</td></tr><tr><td>8E2</td><td>8</td><td>E</td><td>2</td></tr><tr><td>7N2</td><td>7</td><td>N</td><td>2</td></tr><tr><td>7O2</td><td>7</td><td>O</td><td>2</td></tr><tr><td>7E2</td><td>7</td><td>E</td><td>2</td></tr></table>	Parity mode name in 3PS Network Server	Serial data, represented by given amount of bits	Parity mode (none, odd, even)	Number of stop bits	8N1	8	N	1	8O1	8	O	1	8E1	8	E	1	8N2	8	N	2	8O2	8	O	2	8E2	8	E	2	7N2	7	N	2	7O2	7	O	2	7E2	7	E	2
Parity mode name in 3PS Network Server	Serial data, represented by given amount of bits	Parity mode (none, odd, even)	Number of stop bits																																						
8N1	8	N	1																																						
8O1	8	O	1																																						
8E1	8	E	1																																						
8N2	8	N	2																																						
8O2	8	O	2																																						
8E2	8	E	2																																						
7N2	7	N	2																																						
7O2	7	O	2																																						
7E2	7	E	2																																						
Baud rate	Baud rate defines the data speed through serial port interface – the rate value represents the number of symbols that can be transmitted within 1 second. Please refer to the baud rate setting of the analog device and choose exactly the same baud rate setting also in 3PS Network Server. When setting up Inaxsys Zoom, PTZ or Speed Dome cameras using “Inaxsys” protocol, you may ignore the baud rate setting. Available baud rates:																																								

	2400, 4800, 9600, 19200, 38400, 57600, 115200
Address ID	Address ID represents the identity of the device, only analog devices or speed dome cameras require this configuration. Please refer to the Address ID of the device and choose exactly the same baud rate setting also in 3PS Network Server 3.0. Available value is from 1~99. By default, Inaxsys devices will use "1" as Address ID, it is suggested not to change it.

How to Do Live PTZ Operation

To configure PTZ settings, you need to view the live streaming while manipulating the PTZ controls simultaneously in this window.



There are two kinds of PTZ navigation:

Optical PTZ Navigation


1. Get the live view from **Live Preview** window:

Make sure the "Enable PTZ" is checked, a red crosshair will appear on the **Live Preview** window, if the device is in Dual Stream mode, this window will always shows the stream set for live view. You may click on  to switch between the streams.

2. Use the mouse to do the following PTZ operations:


- To execute optical **Panning** and **Tilting**, click anywhere on the live window to allow the camera to move in that direction. The length of the direction indicator is proportional to the Pan and Tilt speed. The farther you place the cursor from the center, the faster the Pan/Tilt movement.

To execute optical **Zoom in** or **Zoom out**, scroll the mouse wheel forward to zoom in; scroll the mouse wheel backward to zoom out.

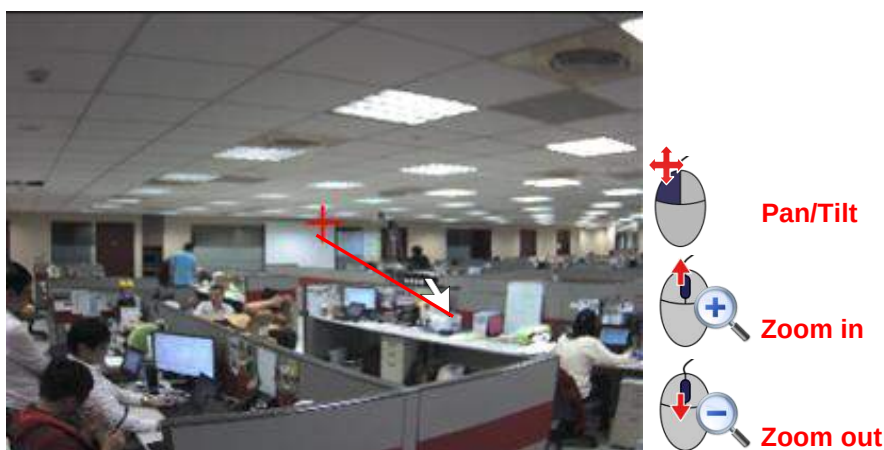

3. Use panel controls to operate PTZ movements:

Click a button on the panel to start, the red crosshair will appear in the view.

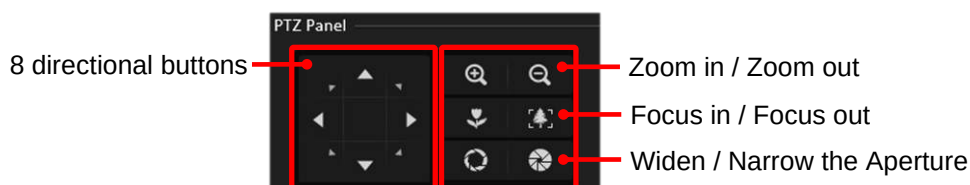


Note

1. The zoom buttons are only applicable for those devices supporting optical zooming.
2. The focus buttons are only applicable for devices with controllable zoom lens. Please remember to turn off the autofocus mode on device firmware before using these buttons.
3. The device should be equipped with DC-Iris or P-Iris and has been switched to manual iris mode before you use the buttons for widening or narrowing aperture.

Digital PTZ Navigation

Digital PTZ allows you to zoom into part of the video and enlarge it to display on screen. This PTZ function is applied to every camera model in 3PS Network Server 3.0 system.

1. Get the live view from **Live Preview** window:
Make sure the "**Enable PTZ**" is unchecked.
2. Click and drag a highlight rectangle over any channel, and the area highlighted will be displayed in the full live video window. In this mode, a picture-in-picture view will show in the lower right of live view window. A red rectangle will mark the currently enlarged view area within the full size video. You may click and drag the red rectangle to see another area.
3. To go back to the original full video view, just right-click on the minimized Picture in Picture view.

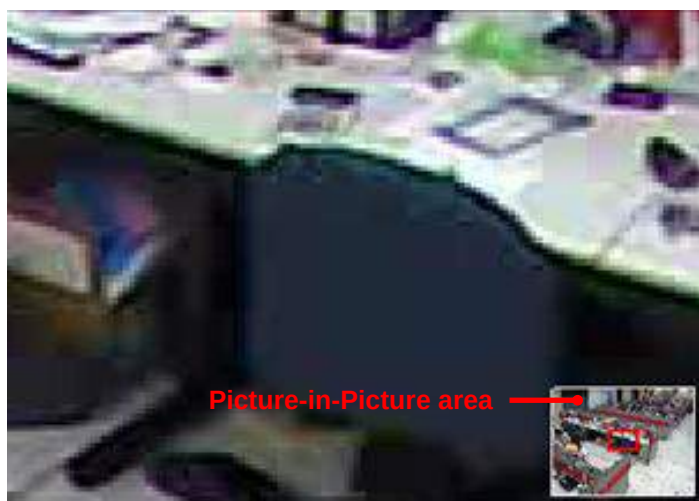

Draw Zoom area




Cancel Zoom area

Set PTZ Preset Points

With PTZ devices, you may define a view by where to look (through panning and tilting) and how close (through zooming) to zoom. Once these views have been saved in 3PS Network Server as preset points, the device can always point to this view upon the event triggering or user's command.

1. Go to **Setup** page → **Devices** tab, select the device from **Device List**, and click **PTZ** tab.
2. By PTZ operation, control the device to point at your desired view, and adjust the zoom level (if available). In **PTZ Preset Point** section, click a preset point name field to start editing the name, then click "+" to set this point. After finishing setting your desired preset points, click **Apply**. You may review the points you set by clicking "→" to go to the point, or "X" to delete it. You may modify an existing point with following procedure: 1. Select it 2. Define a new view 3. Click the "+" to set it 4. Click **Apply** to save it.

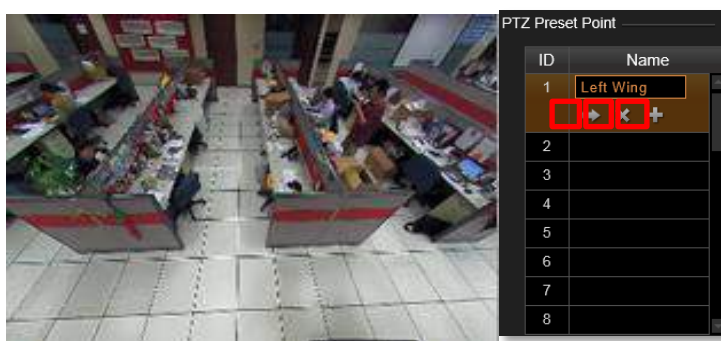

3. After the preset points are set, they are available on **Live View** page → **PTZ control** panel.

Set PTZ Command

If your speed dome or PTZ device has a special function not supported in the standard protocol, you may input it in **PTZ Command** list and execute it. Ex: Activate the wiper to clean the window of the PTZ.

1. To add a PTZ action command, go to **Setup** page → **Devices** tab, select the device from **Device List**, on **PTZ** tab, check the “**Enable PTZ**”.
2. In “**PTZ Command**” area, click in a command entry; input the name, command and then click “**Apply**” to save it. You may also click “→” to execute it or “X” to clear it.

ID	Name	PTZ Command
1	Wash	FF01000418001D
2	Wipe	A00000000A080800FFAF...

Set PTZ Preset Tour


Preset Tour is a preconfigured PTZ sequence that directs the camera to cycle through multiple preset points, including where to look and how long to look at each location. With this preset tour, your PTZ device can perform an automatic patrol to scan through your cared areas.

For example, a Preset Tour should include two or more preset points. Once a tour is initiated, the device will automatically point to the preset points based on the sequence and stay at that view according to the duration you set.



Before setting up Preset Tours, please make sure you have configured PTZ settings and set PTZ Preset Points. To start setting the Preset Tour:

1. Go to **Setup** page → **Devices** tab, select the device from **Device List**, and click **Preset Tour** tab.
2. In the “**Tour List**”, as there is currently no existing tour, click “**Add New Tour**” to add one. The default tour name is “**Preset Tour 1**”.
3. In the “**Preset Points of a Tour**” area, click “**Add Preset Point**” to add the number of points for this tour. The number of points may outnumber the actual preset points you set, for the same preset point might be gone through more than one time in a single tour. For each point, click in the “**Preset Point**” field to bring up the dropdown list, and select one preset point and define the dwell time which represents the time the device would stay in a certain view. Finally, click “**Apply**” to save the tour.

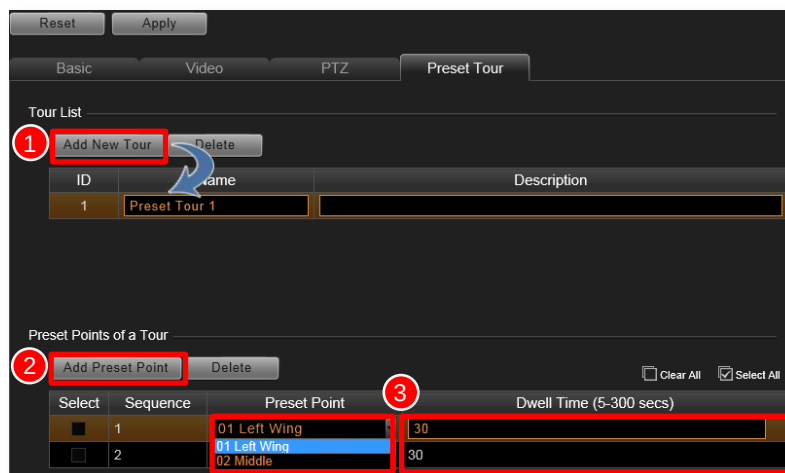

4. After a tour is saved, it is available on **Live View** page→**PTZ control** panel.

Note

The preset points and tour set in 3PS Network Server 3.0 are independent from those you set on device. If you have already defined certain preset points or tour on device, they will not be brought to 3PS Network Server system. On the other hand, the settings on 3PS Network Server 3.0 will not write to the devices.

Configure Fisheye Cameras

With hemispherical lenses, fisheye cameras generate images at up to 360-degree width, which can cover all four corners of a room or both sides of a long aisle. As the original image captured by wide-angle lens is much distorted, to suit most monitoring purposes, the **Dewarping** process is required to alter the uneven lines and shapes before the images are displayed. Nowadays, the fisheye cameras come in two types in terms of the image-correction capability:

- Fisheye Cameras **with** in-camera dewarping function

The dewarping takes place in camera before the video is output to 3PS Network Server. Since the image correction counts on the camera itself, 3PS Network Server will not bear much extra loading, which benefits the system requiring many of these fisheye cameras.

- Fisheye Cameras **without** dewarping function

These fisheye cameras output only original global images, relying on software algorithm processing provided by 3PS Network Server to correct the images. They are suitable for a system with limited bandwidth, for 3PS Network Server processes and responds to User's ePTZ manipulation or demands for changing view modes immediately, without waiting for camera side to deliver a new frame.

3PS Network Server 3.0 makes it possible to integrate both kinds of fisheye cameras into your system with the following advantages:

- Full support for all types of dewarped video stream output from fisheye cameras with in-camera dewarping capability.

- 3PS Network Server's software algorithm can perfectly corrects the original fisheye images, generating **6 specific fisheye view modes** from User's usual perspective.
- Based on user's instant request for changing view mode or PTZ view point, 3PS Network Server will process the original fisheye image and respond to the client individually. In this way, what a client sees on Live View will not affect playback, recording, as well as another concurrent connection.
- The virtualized **ePTZ** manipulation also allows User to dynamically explore any region of interest within the hemispheric view like operating a genuine PTZ device.


To make use of 3PS Network Server's dewarping features for your fisheye cameras, please

1. Adjust Video Quality Settings





After the fisheye camera is successfully added, go to **Setup** page → **Devices** tab, select the device and then **Video** tab, make sure you set the **Stream Mode** as "**FISHEYE**" for a hemispheric camera. This is to make sure this hemispheric camera is outputting fisheye original video stream as a mini fisheye dome camera does.

2. Adjust Fisheye Display Settings

Select your **Mounting Type**, and then **Default Fisheye Mode**. For a Fisheye Mode containing panorama view, you may want to configure the **Default Rotate X** (width of view) and **Default Rotate Y** (height of view) configurations.

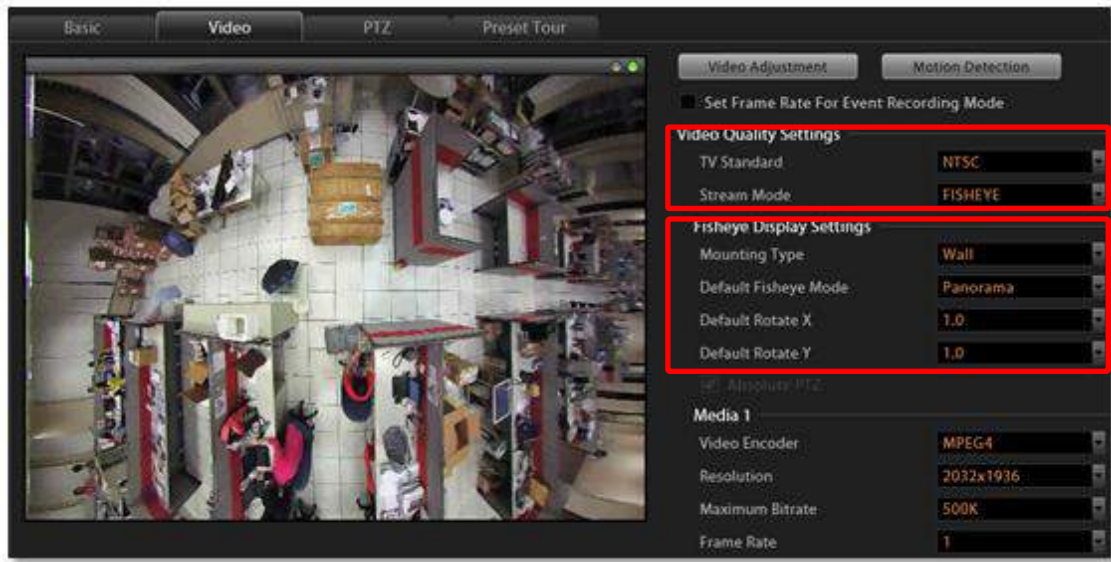

Fisheye Mode	Description	PTZ Navigation
Original View	The very raw fisheye view 	Digital PTZ

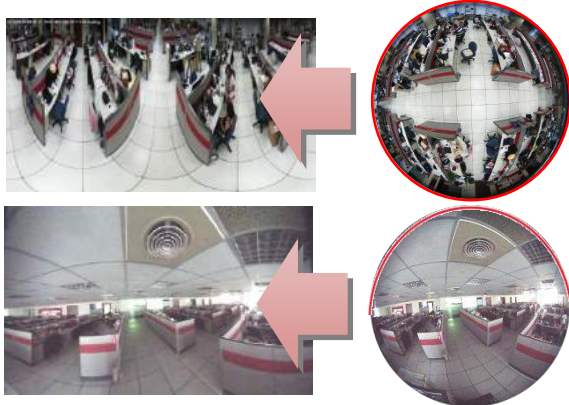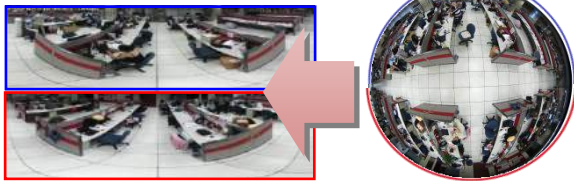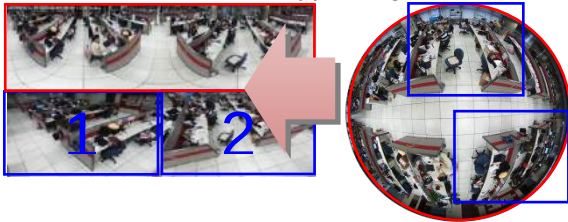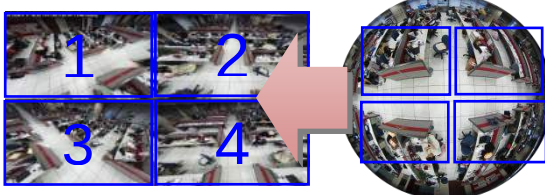Dewarping	One large user-defined cropped area 	ePTZ
Panorama	360-degree panorama view for ceiling mount 180-degree panorama view for wall mount 	Digital PTZ
Double Panorama	Two 180-degree panorama views 	Digital PTZ
Panorama /Focus	One panorama view Two small user-defined cropped regions 	ePTZ
Quad	Four small user-defined cropped regions 	ePTZ

- After the configuration is done, remember to click **“Apply”** to save the settings.

Schedule Recordings


Unlike the traditional analog surveillance system, the IP surveillance system provides a target-oriented recording schedule for devices; the view of each device can be recorded based on your required time segments and event types. For example, you may have a camera installed on the office ceiling do continuous recording during work hours, and record only upon the triggers (incidents that detected by system) at night. In this way, the system does not waste disk space storing meaningless parts, and you save lots of effort browsing playback for specific events.

For the device's recording schedule, 3PS Network Server 3.0 supports Schedule recording and Event recording modes, which are set up on a week-based timetable; the event-handling schedule can also be configured on it. This section describes how to setup the recording schedule for the IP cameras / video servers.

Configure the Recording File Properties

Before setting the recording schedule, you may define (1) where the recordings are stored, (2) how long an event recording is and (3) how long a recording file will be kept in the system.

1. To set the saved recordings folder, go to **Setup** page→**Storage** tab, make sure you have assigned the disk drives to store recorded files. For related recording settings, please refer to [Storage Management](#) on page 83.
2. To define how long an event recording is and the recording's lifecycle, go to **Setup** page→**Schedule** tab, select the device from **Device List**, a week schedule will appear on the right. Configure the recording file related settings. The settings below will make an event recording as long as 5+30 seconds, which will be kept on server for 30 days.

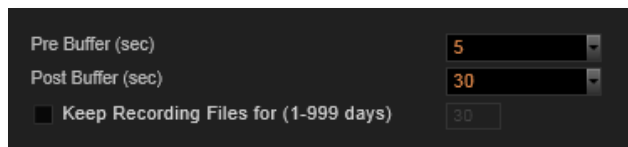

Attributes Explanation

Field Name	Description
Pre-event Recording Buffer (sec):	3PS Network Server keeps a short cache of video received from devices. If an event is triggered, 3PS Network Server will automatically store the pre-event buffer along with the recording of the event itself. Available choices are 0, 3, 5 seconds.
Post-event Recording Buffer (sec):	This will determine how long after the event is triggered should be included in the event recording file. Available choices are 10, 30, 60 ,

	120, 180, and 300 seconds.
Keep Recording Files for (1-999 days):	3PS Network Server 3.0 will keep recording file of specific device for the number of days you set here. The default value is 30 , if you want to modify it, please check the box to start configuring it. Available value is among 1~999 days.

Tip

How to make proper storage arrangement

In 3PS Network Server 3.0 system, there are two file-deleting mechanisms you can use based on different needs. If both rules are set, the threshold reached earlier will execute the deletion first.

1. **"Keep Recording Files for (1-999 days)"** – Set this rule if you have more concern in how long the recordings are kept, especially when you don't want the old recordings to stay longer in the system than a certain period.
2. **"Reserve space"** in the **Disk Drive List** on **Setup** page → **Storage** tab - If the disk space is more critical in your system, please give an approximate value here, the system will always reserve this amount of space to store the newer recordings.

Given that you set the **Reserve space** as **30G**, while **Keeping Recording Files** setting is **5 days**, certain recording file will be deleted when it has been kept on disk for 5 days, despite that there is still plenty of available disk space.

Set the Schedule

Here you can configure camera's recording schedule on 7 days / 24 hours basis. The schedule is split into segments of 20-minute-length. By default, once a device is added to the system, its schedule is automatically set to full time schedule recording and event handling. You should configure it according to your system plan.

Go to **Setup-Schedule** tab, on **Schedule Setting** panel:

1. Select the recording mode from "**Recording Mode Bar**"

☒ **Schedule Recording** Continuous recording that channel

☐ **Event Recording** Records a period of the detected motion event. Please make sure you have configured the motion settings on **Setup** page → **Device** tab beforehand.

☒ **Event Handling** Event handling is activated.


(Please refer to [How to Edit an Event Rule](#) on page 73 for **Event Rules** settings)

: Clear the setting

☒ **Schedule Recording** ☒ **Event Handling** Continuous recording + event handling

☐ **Event Recording** ☒ **Event Handling** Event recording + event handling


2. Click and drag over the "**Time Track**" to set time period.

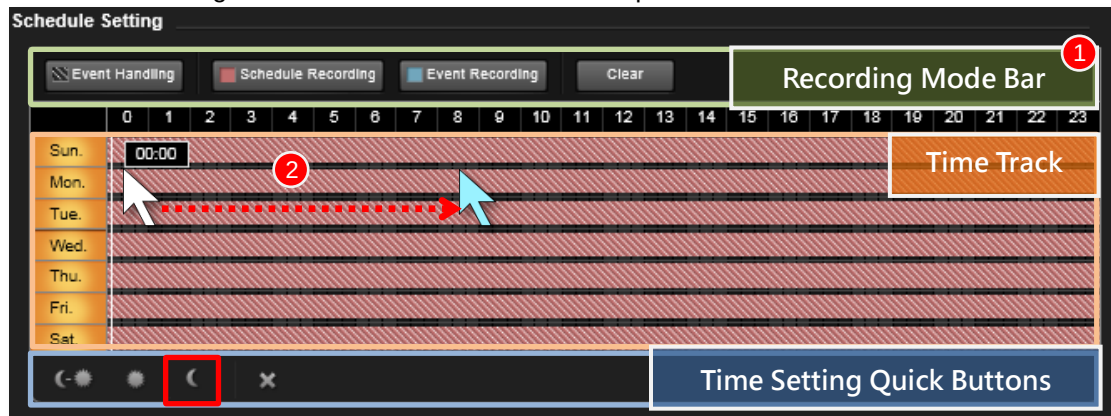


Use Time Setting Quick Buttons to Set the Time in One Click

Select the recording mode, then click one of these buttons to apply the mostly-used time settings.

Click  to apply schedule **for all day**.

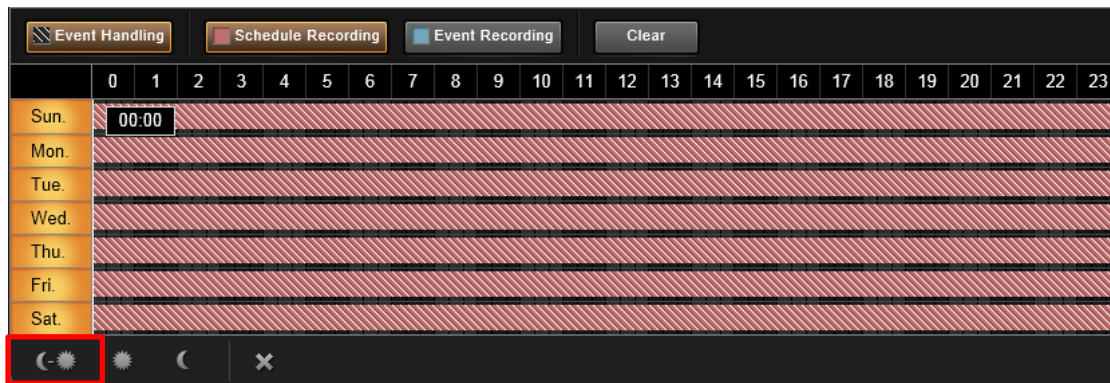

Click  to apply schedule **from 06:00 to 18:00 every day**, with the settings for the rest of the time track being cleared.

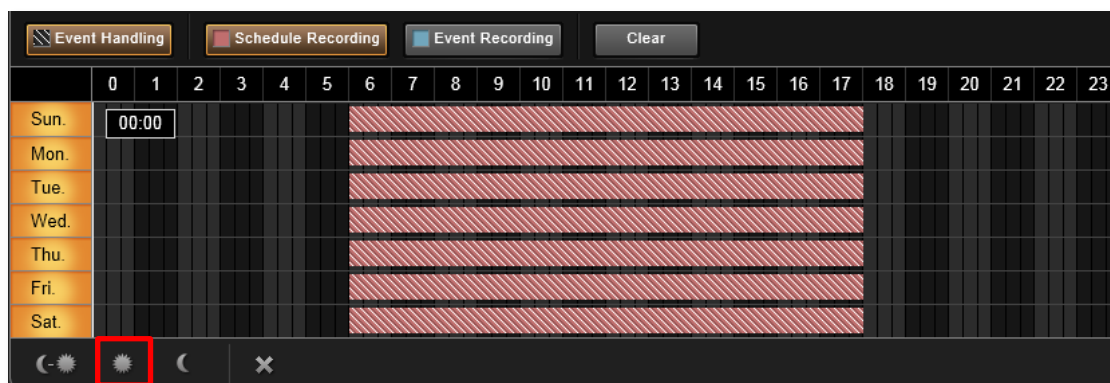

Click  to apply schedule **from 18:00 to 06:00 every day**, with the settings for the rest of the time track being cleared.




Click  to clear all schedule setting in this device.




Lock Specific Days

Clicking the day of the week will lock/unlock that day from schedule setting. You can shield schedule on a certain day from being changed by changes in other weekdays. You may easily set just the weekdays or the same time over the same week this way. To do this:

1. Click the days to shield them.

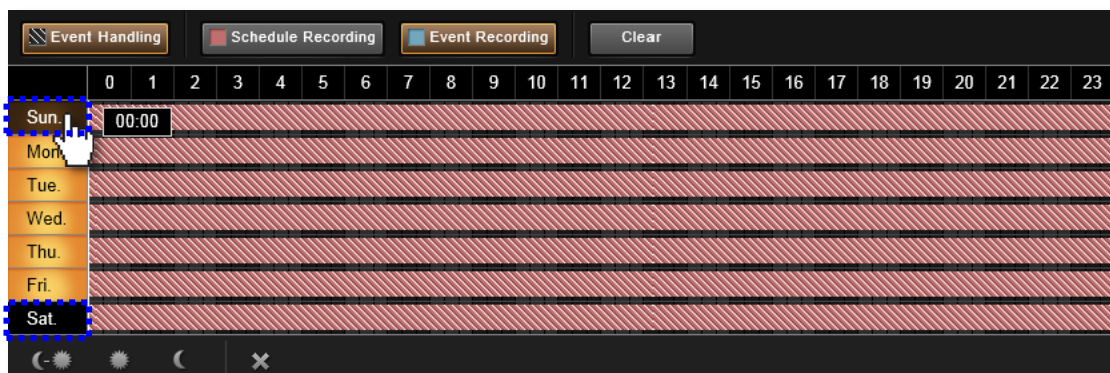


2. As you drag any settings over the time track, it will not apply to those shielded days.

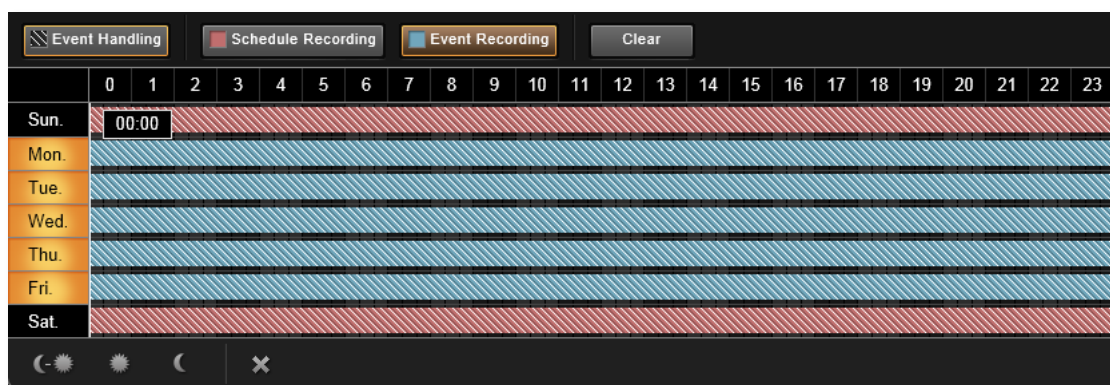


Copy an Existing Schedule to Others

With plenty of devices in your system, it happens that you want to apply the same schedule to multiple devices. After creating a schedule for one device, you can copy it to other cameras.

1. Go to **Setup** page → **Schedule** tab, on **Device List**, select the device you want to copy schedule settings from.
2. Click the **“Copy”** button.
3. On popup window, select target devices you want to copy schedule settings to.
4. Click the **“Apply”** button.

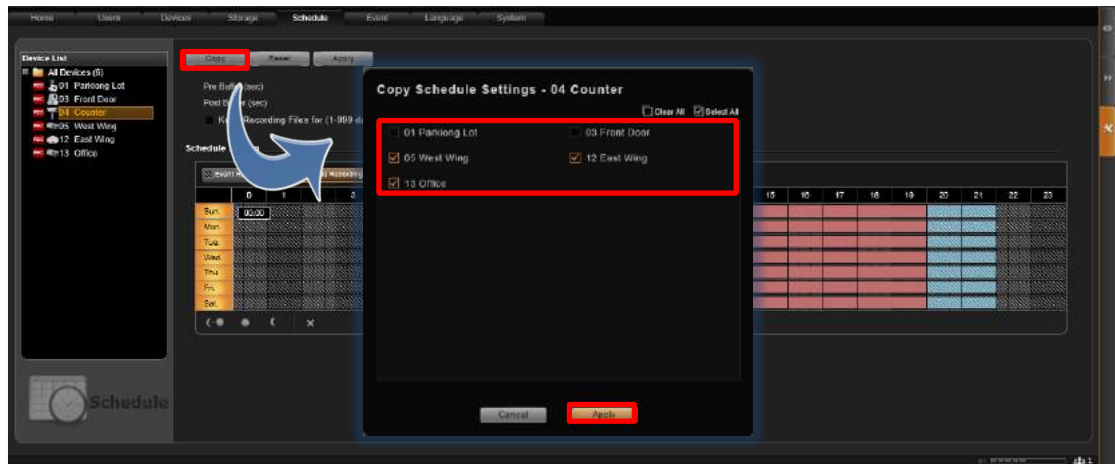


To check the result, go to **Schedule** tab, click **All Devices** on **Device List**.

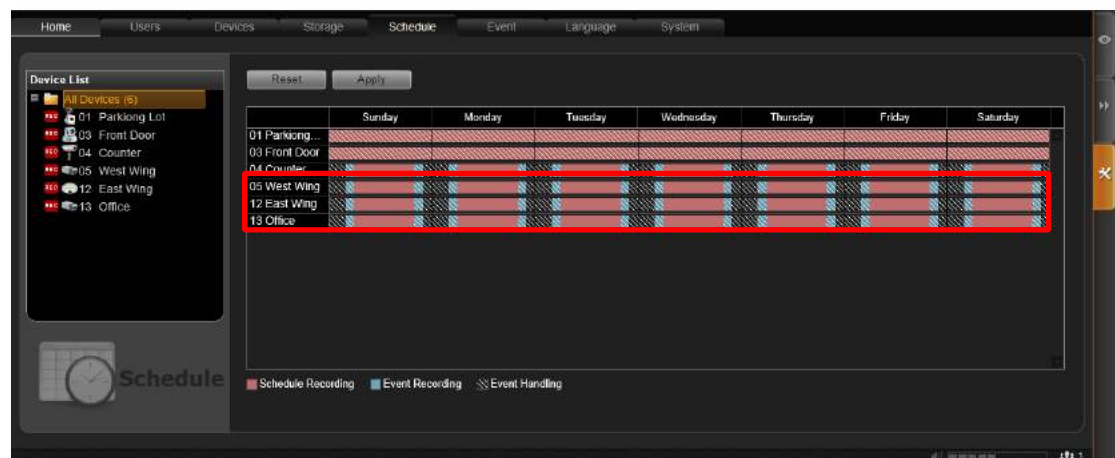

View the Entire Recording Schedule

On **Setup** page → **Schedule** tab, click **All Devices** on **Device List**, an overview of all device schedules will be listed on the right.

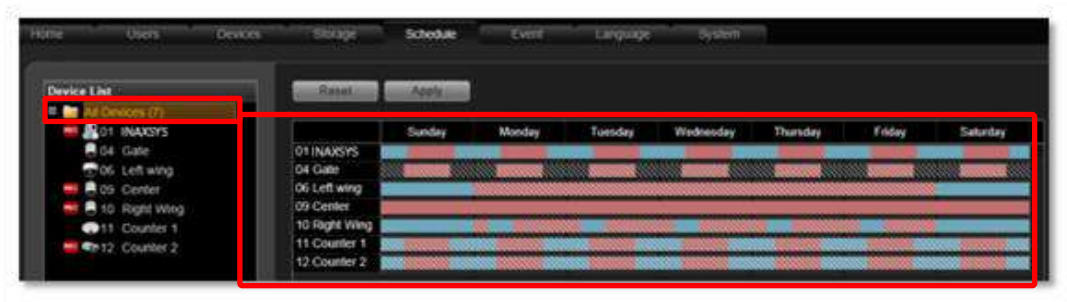

The below list explains the status of different bar patterns:

Icon	Recording Function Description
	Schedule recording. During this period, device view will be recorded continuously.
	Event handling. During this schedule, the event rules you set are active.
	Schedule recording and Event handling are both active during this period.
	Event recording. During this period, only detected events (e.g. Motion/PIR) will be recorded .
	Event recording and Event handling are both active during this period

How to Know if the Recording is Proceeding?

As the recording is taking place, you can observe the status on the **All Device List**. There will be an icon  appearing in front of the device. In **Playback**, you can drag the playback bar to current time position to check the latest recording.

Event Management

When something happens on camera site, such as someone walks by, the door opens or closes, a fire breaks out or the sun goes down – these are all **Events**. Events which occur in the environment or were preprogrammed in the camera may be used as **Triggers**. Triggers cause the device to react with **Responses**. The link between trigger and response is governed by **Event Rules**. Event rules become active or inactive based upon a weekly **Schedule**. Each event rule detects one specific trigger and may initiate multiple responses. An example rule would be for 3PS Network Server to send email to alert the supervisor (**Response 1**) and trigger alarm (**Response 2**) when motion detection from camera is triggered (**Trigger**) during the event handling active period (**Schedule**).




How Does 3PS Network Server Handle Events

In 3PS Network Server 3.0, each device can be involved in several event rules. As different device models possess various capabilities, the supported event trigger types would vary. For example, a PIR built-in camera can execute a PIR-triggered event rule, while this option is not provided to other models without this feature; similarly, the supported response types would vary by device models, like Goto-preset behavior can only be executed by PTZ devices. The below chart shows 3PS Network Server supported **Trigger** types and **Response** types. Once a device is added to 3PS Network Server, the server would create empty rules with compatible trigger types for you to configure.


Trigger Type	Response Type
Video Motion Detection	Focus Channel in Live View
Digital Input	Make Device Pan/Tilt/Zoom
PIR Detection	Audio Alert
Video Loss	Trigger DO Device
Video Recovery	Execute URL Commands
Network Loss	Upload Snapshots to FTP
Network Recovery	Email Notifications/ Snapshots

How to Edit an Event Rule




1. Go to **Setup** page → **Event** tab. All the editable event rules are listed in the device ID order.
2. Select a device from the **Device List** on the left. Based on the trigger types this device supports, the corresponding events rules are listed accordingly on the right. In this example, this selected camera model supports three motion detection regions, and hence three MD trigger event rules are available.



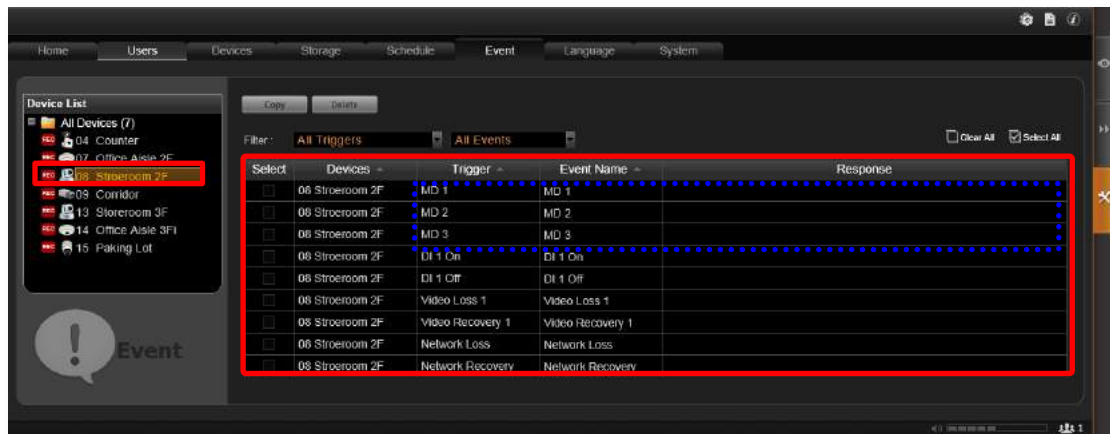


3. Highlight the rule you wish to edit. Click in the “**Event Name**” column to edit the event name, and then double-click the “**Response**” column to edit the response action.

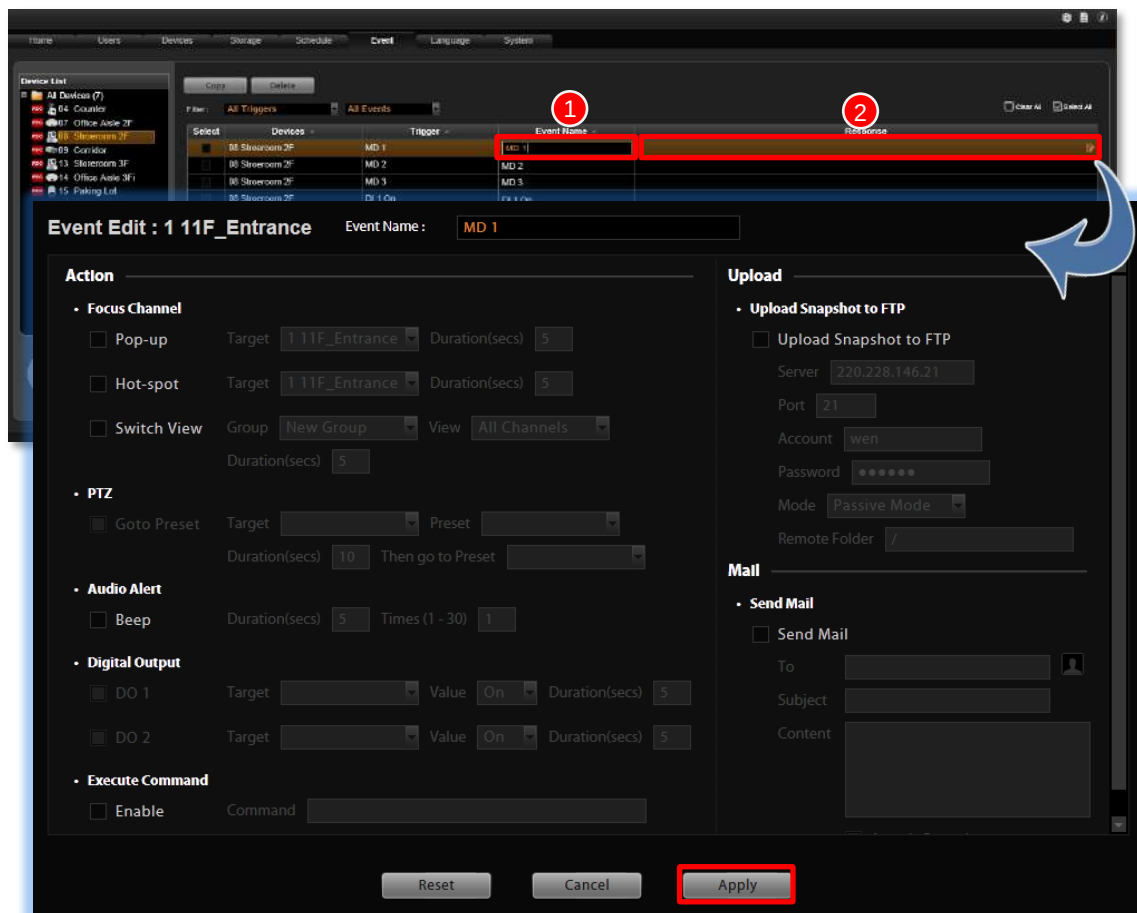

You can enable multiple responses by first checking the box(es) to enable the items:

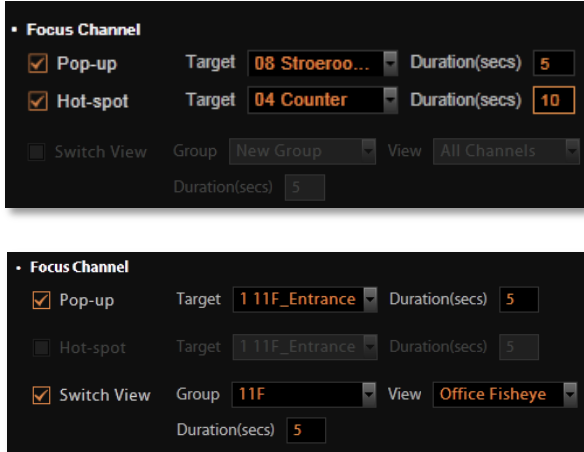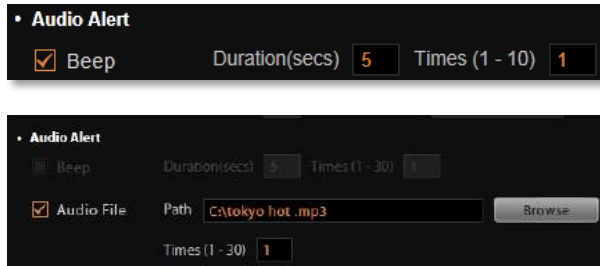Action Items	Function Description
 The screenshot shows the 'Focus Channel' settings. It includes checkboxes for 'Pop-up', 'Hot-spot', and 'Switch View'. Each checkbox has a 'Target' dropdown and a 'Duration(secs)' input field. 'Pop-up' is checked with target '08 Stroeroo...' and duration '5'. 'Hot-spot' is checked with target '04 Counter' and duration '10'. 'Switch View' is unchecked with target 'New Group' and duration '5'. Below this, there are fields for 'Group' (11F) and 'View' (Office Fisheye) for the 'Switch View' option.	This kind of action will focus your attention on the channel when triggered. Pop-up: Brings up event pop-up instant playback window of selected channel upon trigger. You may also define the display duration of video on the window. Hot-spot: Displays video in Hot-Spot window (red flashing frame) upon event. You may also define display duration of video on the Hot-spot window. Switch View: The current Live View will be switched to another one for a while. To enable this option, you will need to customize and save Views on Live View screen first. You may also define duration of the temporary View. Only Public Views are selectable for Switch View event rule. Hot-spot and Switch View responses cannot be executed at the same time.
 The screenshot shows the 'PTZ' settings. It includes a checkbox for 'Goto Preset' with a 'Target' dropdown (08 Stroeroo...) and a 'Preset' dropdown (01 Left row). Below this, there is a 'Duration(secs)' input field (10) and a 'Then go to Preset' dropdown (03 Right row).	Upon being triggered, specific camera can make PTZ movements like going to specific PTZ presets as responses. You may set both the start / end point and the duration. This action is only available when you have set the preset points for
 The screenshot shows the 'Audio Alert' settings. It includes a checkbox for 'Beep' with a 'Duration(secs)' input field (5) and a 'Times (1 - 10)' input field (1). Below this, there is a checkbox for 'Audio File' with a 'Path' input field (C:\tokyo hot .mp3) and a 'Browse' button. There is also a 'Times (1 - 30)' input field (1).	Setup 3PS Network Server to play beep sound for a number of repetitions. On 3PS Network Server Workstation client computer, you can upload a WAV file or an MP3 file as the alert sound, and set how many times this audio file is play when event occurs. Beep and Audio file responses cannot be executed at the same time.

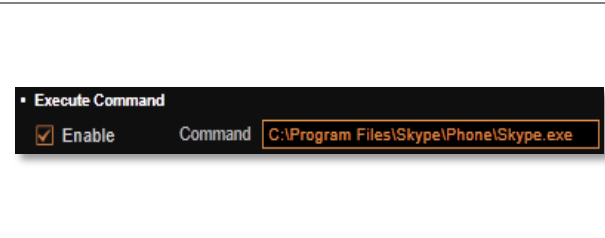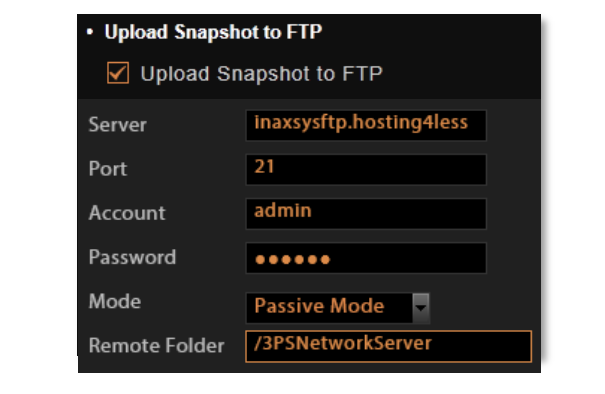	Setup the DO to become ON or OFF upon trigger, only the devices supporting DO functions can be the target devices.
	Enable 3PS Network Server to execute a certain command upon this event. You can use it to integrate 3PS Network Server's event handling with other programs. Enter the path of the command to be executed upon event.
	Enable 3PS Network Server to upload FTP to a FTP site upon this event. The default FTP settings can be set in advance in Setup page→System tab→Settings → FTP Settings. You may set another FTP destination here for this single event. Please also make sure the FTP server setting is correct and the folder access rights are properly configured.
	Enable 3PS Network Server to send email notification via SMTP server. The default SMTP and sender's email settings can be set in advance in Setup page → System tab → Settings → Email & SMTP Settings. 1. Type one or more recipients' email addresses in "To" column (if more than one, please separate them by ";" symbol) or click the  icon to select recipients from existing 3PS Network Server User list. The Email address should be set in advance (in Setup page→Users tab→Users) for a 3PS Network Server User so that it can be selected in this list. 2. Edit the email subject and content. 3. Choose to attach a snapshot or not. If event trigger type is Video Recovery or Network Recovery, this function is disabled.

4. After configuring the actions, click "**Apply**" to save this response.
5. Go to **Setup** page→**Schedule** tab and set the **Event Handling** schedule for this device. Event responses will only be triggered when the trigger time falls within either the **Event Handling** recording or the **Event Handling with Schedule** recording period.

6. To check if this rule is successfully set, please make sure you have properly configured the involved (1) triggering side settings like **Motion Detection Regions** or **DI**, (2) response side settings like **PTZ Preset Points**, **SMTP Server** and **Email Recipients**, **FTP Server** or **DO**. Then set the **Event Handling** schedule for current time and trigger this rule.

Note


1. **Sending email**, **Uploading snapshot to FTP** and **Executing command** actions are executed on the server computer, not from the client computer.
2. There must be video stream from device when the event happens for event responses to work.
3. Internet Explorer browser may become unstable due to frequent pop-up instant playback windows, please avoid setting the “**Pop-up**” action as the event rule for a device which is too frequently triggered. The next server version v3.1 will improve the program efficiency with Internet Explorer browser.

Manage the Event Rules


Event List panel gives an overview on event rules set on the 3PS Network Server. Go to **Setup** page → **Event** tab → select **All Devices** on the left. As the entire available rules of all devices are listed here, you may want to sort out some of them from the long list.

View the Event Rules

To sort by **Device** name, **Trigger** type or **Event Name**, click the titles to list the entries in ascending or descending alphabetic order.

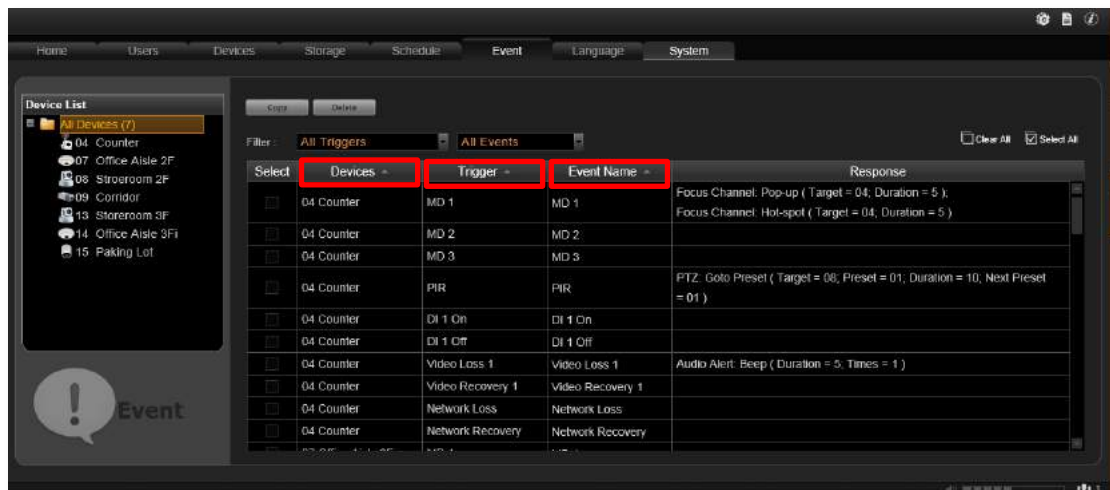


To filter out the configured events, select from the “**All Triggers**” dropdown list; or filter by the event type by selecting from the “**All Events**” dropdown list.

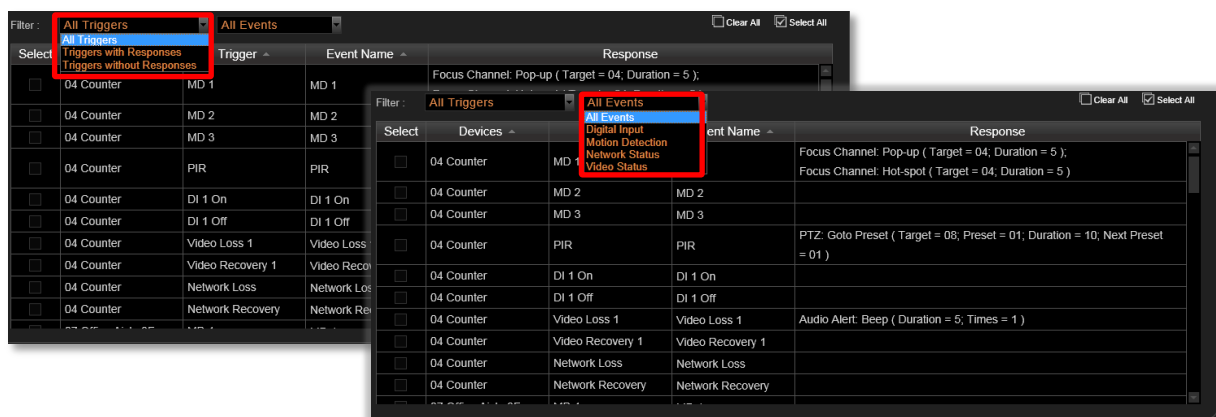


Delete the Event Rules

On **Event List**, select the rules you wish to delete, and then click “Delete” to clear this rule.

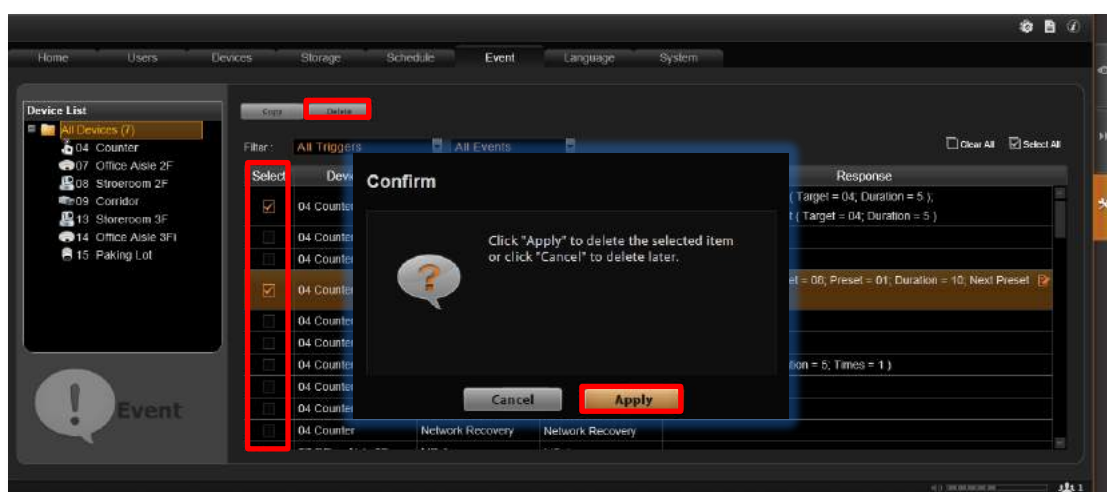

How to Setup SMTP Settings for Event Rules

3PS Network Server 3.0 supports email notification for **Event Handling** sent through an SMTP server. You can specify the email and server settings here.

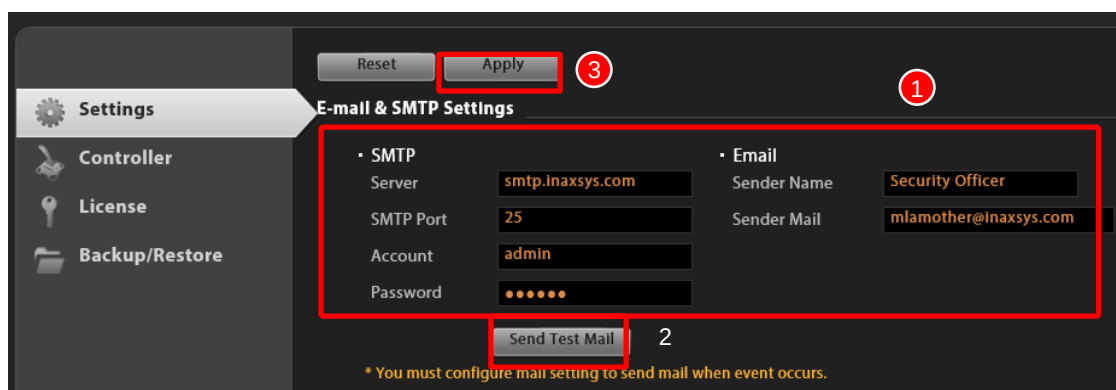

1. Go to **Setup** page→**System** tab→**Settings** → **Email & SMTP Settings**.
2. Fill in **each** of the following fields.

Field Name	Description
Server	Input the sender's SMTP server address. Only alphabets, numbers, and the symbols (.), (_), (-) are valid. 3PS Network Server <u>does not support the SMTP services with SSL protocol</u> . If you wish to use a free webmail SMTP service, you may choose certain webmail providers such as Yahoo (SMTP: smtp.mail.yahoo.com Port:25) or whose SMTP servers don't require SSL authentication.
SMTP Port	Set the SMTP port, allowed value is from 1~65535, default is 25 .
Account	Input the name of the SMTP server account. Only alphabets, numbers, and the symbols (@), (.), (_), (-) are valid.
Password	Input the password of the SMTP server account. Only alphabets and numbers are valid.
Security	Certain webmail providers provide the SSL/TLS-encrypted SMTP connections to secure your data when sending/receiving emails. Please check if the SMTP connection settings you use (especially the SMTP Port) now require to enable either SSL or TLS.
Sender Name	Input the name or title of the sender. You may input a name different from the account name.
Sender Mail	Input the sender's email address, should the same account you set for SMTP server.


- As all necessary information is filled in, click "**Send Test Mail**" to try sending an email according to your settings, and then log in to your SMTP server to check incoming emails. If the test mail is sent successfully, 3PS Network Server is ready to send out emails.
- As the settings are confirmed, click "**Apply**" to save.

How to Setup FTP Settings for Event Rules

3PS Network Server 3.0 supports uploading snapshots to FTP servers for Event Handling.

You can specify the email and server settings here.

- Go to **Setup** page→**System** tab→**Settings** → **FTP Settings**.

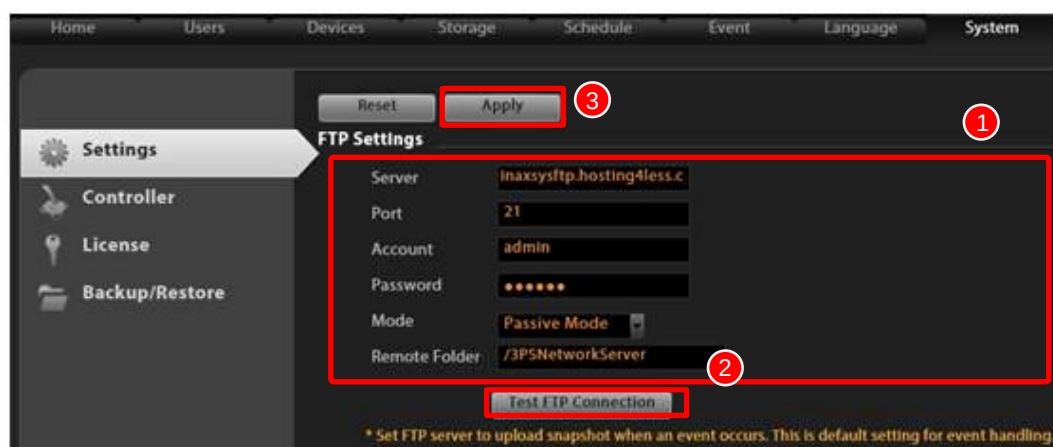

2. Fill in **each** of the following fields.


Field Name	Description
Server	Input the FTP server address. Only alphabets, numbers, and the symbols (.), (_), (-) are valid
Port	Set the FTP port, allowed value is from 1~65535, default is 21 .
Account	Input the name of the FTP server account. Only alphabets, numbers, and the symbols (@), (.), (_), (-) are valid.
Password	Input the password of the FTP server account. Only alphabets and numbers are valid.
Mode	The FTP works in two very different manners, Active mode and Passive mode. If your FTP server is behind the firewall or a NAT router, you have to use " Passive " mode.
Remote Folder	Input the upload path of the file. Default will be / to represent the root folder.

3. As all necessary information is filled in, click "**Test FTP Connection**" to test the connection. If 3PS Network Server pops up a "Testing **FTP connection was successful**" message, 3PS Network Server is ready to upload to this FTP.
4. As the settings are confirmed, click "**Apply**" to save. The FTP settings here will be default for every event rule.

System Log


The activities performed by logged-in Users are recorded on server as **System Log**. With the access permission, a user may view, search and export this record for analysis or investigation. This section will provide the instructions on how to read and search data in the system log.

“**System Log**”  is one of the resident buttons on top of 3PS Network Server user interface, click it to enter search window.

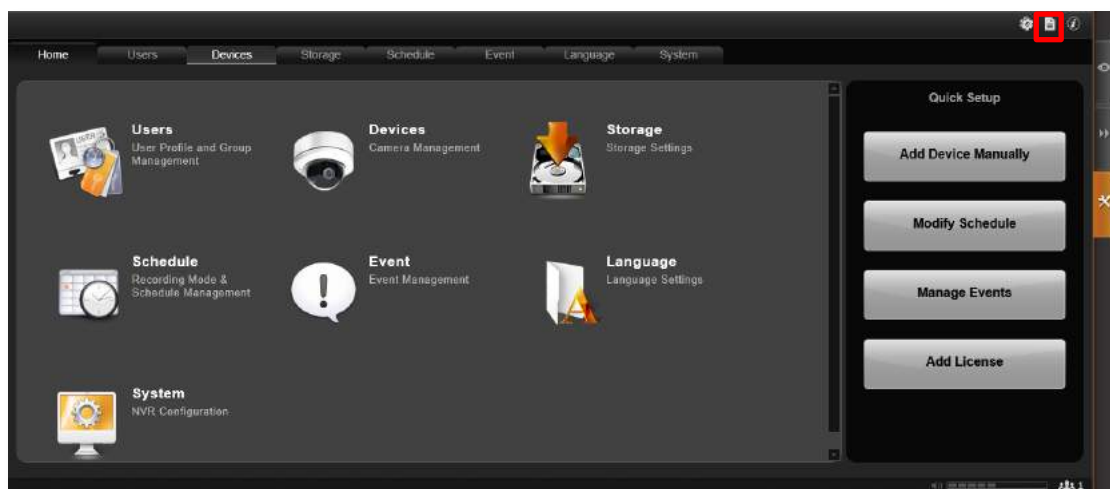


Define Search Time

You need to first define the time of the logs you would like to search for. On **Search Time** bar, define the date and time. Default is your current client time.

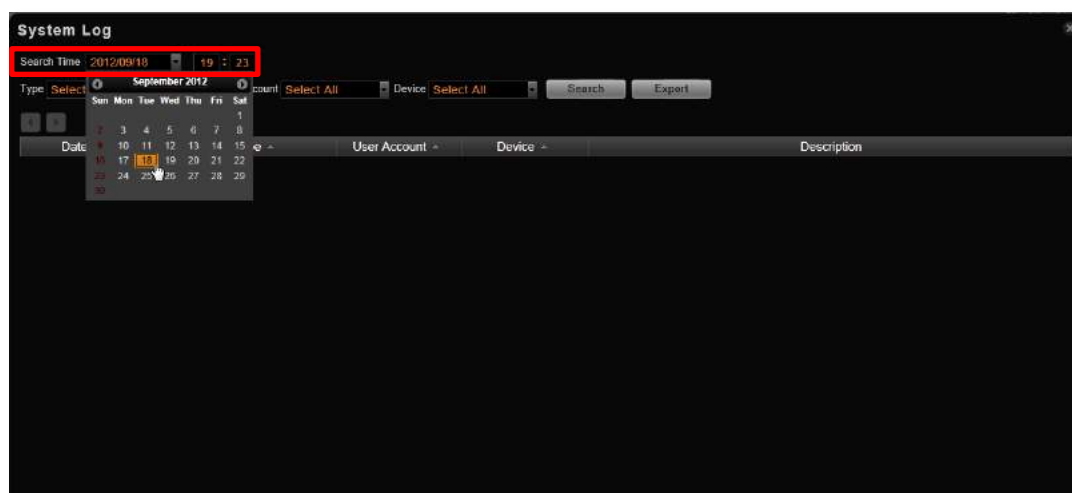


Choose Log Type

You may filter the logs by **Type**, **User Account**, and **Device** by selecting from dropdown list, then click “Search”. By default, all types are selected.

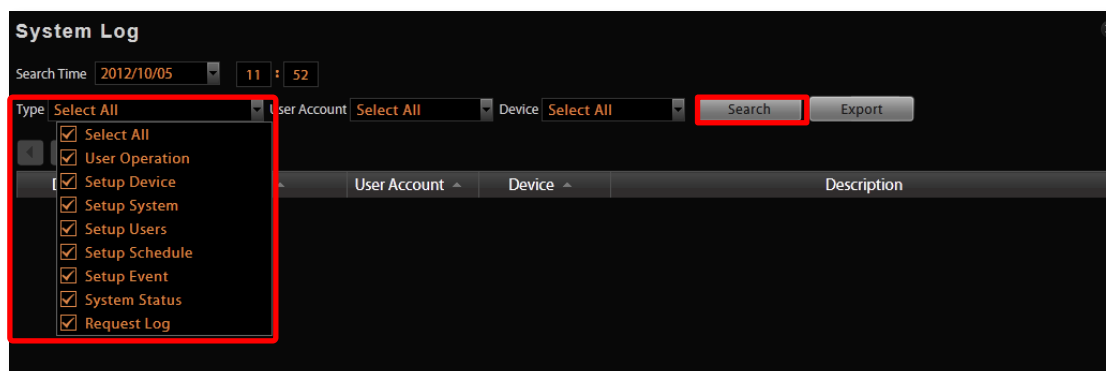

Read the Log

The search result will show 1000 records before and after your query time. You may click the pagination buttons ◀ ▶ to navigate earlier or later records. If there is an icon ⓘ on the right top corner of an entry, click it to view the full description content.

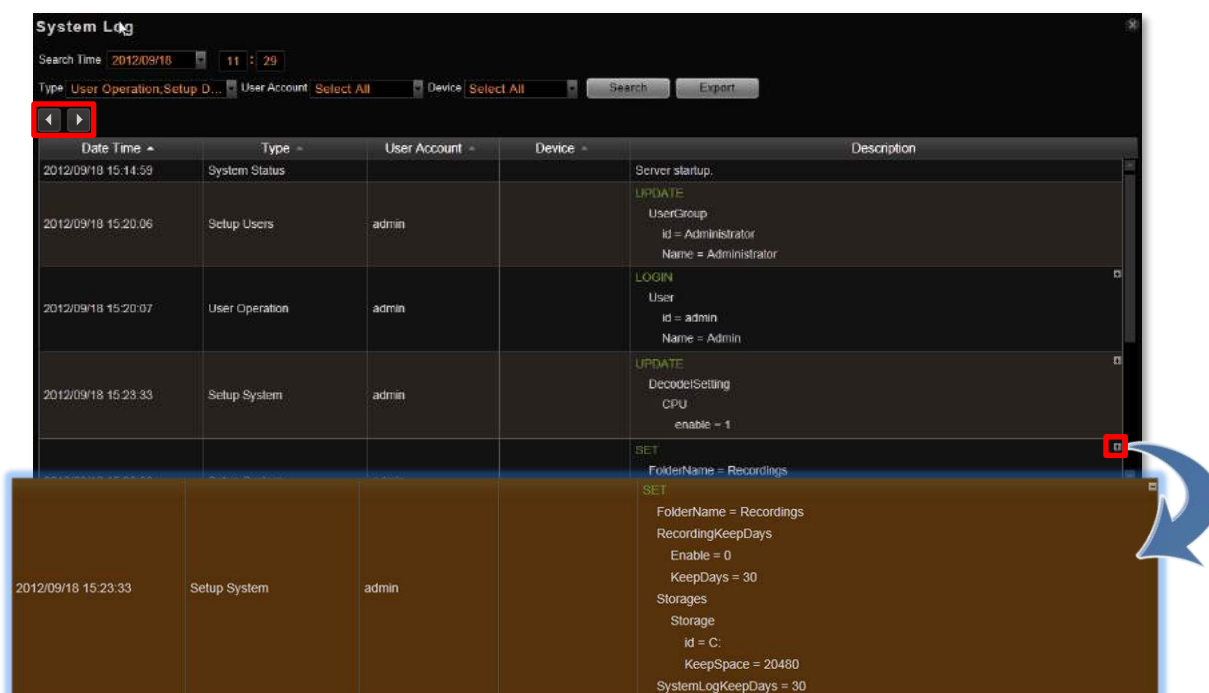

A log entry contains several kinds of information including **Date Time**, **Type**, **User Account**, **Device** and **Description**. Check **Type** and **Description** fields to know what the user has done or what happened to the whole system. In **Type** field shows what major functions user engaged in, in **Description** field narrates how the change was done (in green font color, uppercase) and the result (in white font color).

Date Time ▲	Type ▲	User Name ▲	Device ▲	SET	Description
2012/05/09 15:15:28	Setup System	Admin		UIStyle MainForm Alignment = left	

The following user behaviors are recorded in 3PS Network Server:

Type	Description
User Operation	Login, Logout, Manual Record, Trigger DO
Setup System	Recording Configure, Storage System Setting
Setup Users	User – Add, Delete, Modify User Groups – Add, Delete, Modify
Setup Schedule	Modify
Setup Event	Modify
System Status	Server start up, disk is full, disk is not found, disk is available
Request Log	Time, source ip address, /SYS/SystemMgmt/xxxxx ,200

Note

If the pagination button appears to be disabled, that means no more records found on 3PS Network Server. By default, the server will keep the logs for 30 days. If you wish to adjust the period, please go to **Setup** page → **Storage** tab, in **Recording Settings** section, key in the value in this field:

Export the Log

Click “**Export**” button to export the log as .csv file. You can specify the time duration, type user and engaged device of the logs, and click “**Apply**”.

System Log

Search Time :

Type User Account Device

Export System Log

Time Duration : ~ :

Type

User Account


Device

Storage Management

This section describes how to manage storage space in 3PS Network Server. Please note that this section only deals with the overall storage rules, and not storage of individual channels.

Please note that as 3PS Network Server continuously writes and deletes file from the disk drive, using a removable disk may risk losing recording when device is removed while being accessed.

Go to **Setup** page→**Storage** tab.

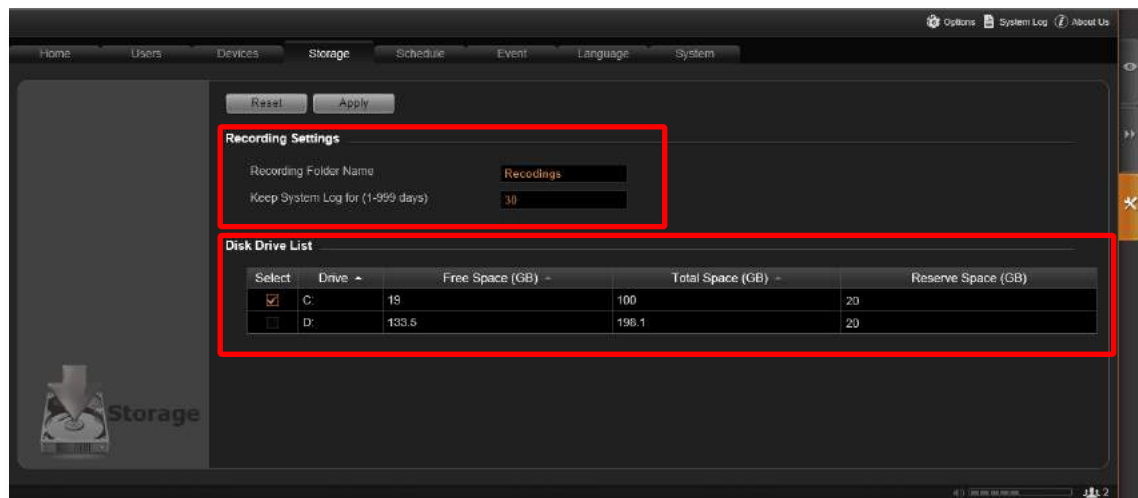

Change Recordings Folder Name

In “**Recording Settings**” section, you may change the name of video recordings folder. The video files are saved in a folder named “**Recordings**” under hard drive root directory. You may change the name here.

Set System Log Lifecycle

System Log is the record of User activities and events that took place on the server. In “**Recording Settings**” section, you may set how long this record is kept on the server. Default is **30** days.

Set Hard Drives for the Recorded Files Deletion Rule

1. On **Disk Drive List** displays the detected hard drives in your server computer. You may select the storage location of the recording files and set the deletion threshold. By default, 3PS Network Server will select **C** drive as storage location.

Select	Drive	Free Space (GB)	Total Space (GB)	Reserve Space (GB)
☒	C:	60.4	100	30
☒	D:	136.6	198.1	20

2. After selecting the disk drive, please set the deletion rule. There are two ways to delete recordings, when both are active, 3PS Network Server will start to delete old files when any of the criterions is met:
 - (1) Keep the recordings for a number of days, and delete files older than this period by 1 GB at a time. Please go to **Setup** page → **Schedule** tab to set it.
 - (2) Keep recordings until the disk is almost full, and then delete the earliest recording files by 1 GB at a time. 3PS Network Server will delete old files when available space is lower than **Reserve Space** you set in **Disk Drive List**.

When setting the deletion rule, please input a number in **Reserve Space** which should be smaller than your current **Free Space**.

Item	Description
Free Space (GB)	Currently available space of the chosen disk drive.
Total Space (GB)	The total volume of the chosen disk drive.
Reserve Space (GB)	This is the amount of space to be reserved for the whole computer system. Once the free space is used up as to reach the limit of reserve space, the system will delete the earliest recordings. <u>The “Reserve Space” should always be smaller than “Free Space”</u>

3. When finish settings, click “**Apply**”.


Manage User Groups/ Users

The User Groups/Users page allows you to (1) manage the access permissions of different user groups, (2) add users to or delete them from user groups, (3) and assign users to specific user group. This chapter will take you through these settings.

Access Permissions

In 3PS Network Server 3.0, the access permissions are managed by **User Groups**. **User Groups** defines what functions and devices are allowed for each user. Different **User Groups** will have different access rights in terms of permitted operations with each device like **Live View**, **Playback**, and 3PS Network Server management operations like **Device Setup**, **Schedule Setup**, **Event Setup** and **System Setup**. For example, an Administrator User is allowed for all the operations in 3PS Network Server, while a standard User may only be permitted to do **Live View** and **Playback** with limited devices.

The chart below displays different employees as 3PS Network Server Users and their access rights in this system:

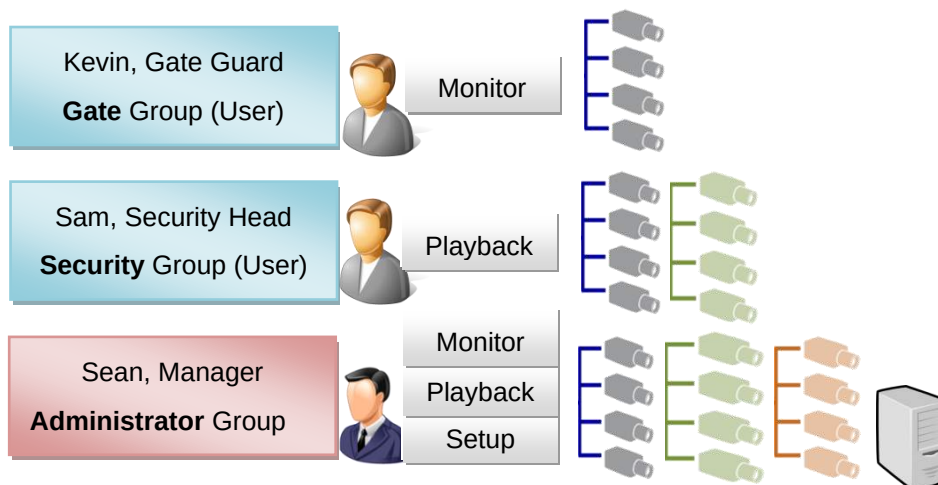

Overview

Go to **Setup** page → **Users** tab. There are two sections to manage User Groups and Users individually.

User Groups: To setup user groups and its permissions for device and functionalities.

Users: To manage user accounts and configure user information.

3PS Network Server 3.0 has integrated **Microsoft Active Directory®** service to provide network administrators a more convenient choice for user management. Active Directory is a directory service built in Microsoft Server products to manage user identities and privileges

within the domain network. As 3PS Network Server 3.0 runs on a server computer logged on to the same domain with Active Directory server, you can import a user account or a group from those concurrently existing in Active Directory into 3PS Network Server. In this way, the user identification is processed by Active Directory centrally; there is no need for 3PS Network Server administrator to maintain user accounts as long as they are under management of Active Directory service.

User Groups

You can specify access permissions to each device for a whole user group. This user grouping can save you significant amount of works if you have multiple users performing similar tasks and acting as similar roles.

There are already two default User groups


- **Administrator**: With full permissions in the 3PS Network Server.
- **User**: With the permissions to watch all camera live view and playback.

You can create a new user group on 3PS Network Server or import an existing group from the active directory database within your domain.

1. Select  **User Groups**, click **Add** and then choose the group type:


- ☐ ● Add a new user group:

Insert **ID**, group **Name** and group **Description**, your input in the **Name** field will be the name of this User group. Click **Apply** to finish.

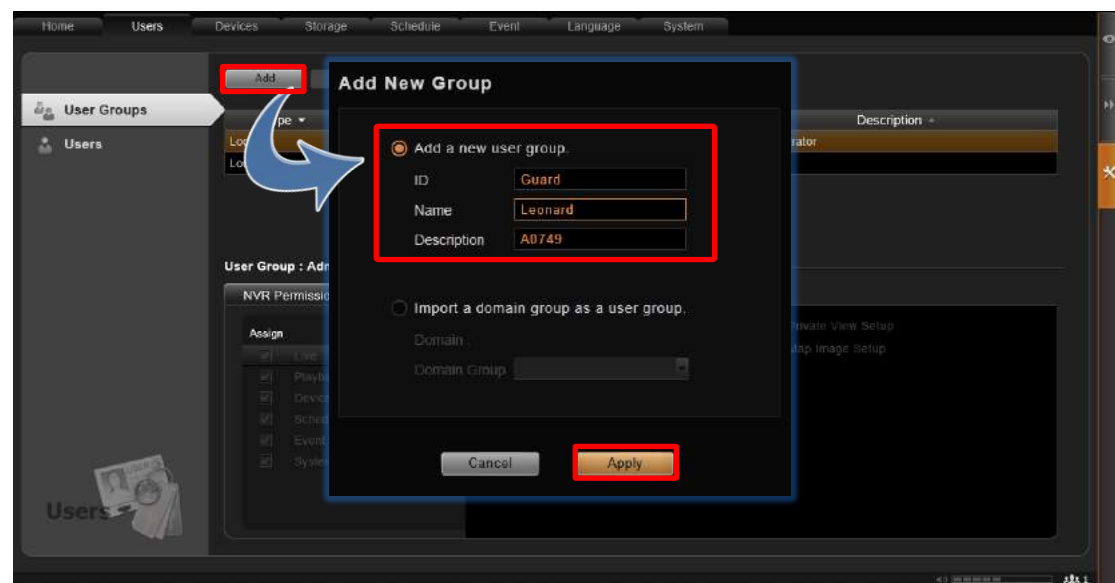

- Import a domain group as a User group:

Choose an existing user group from your domain, and click **Apply** to finish.

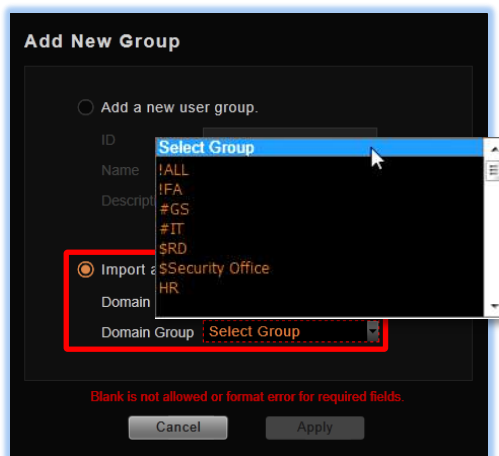


The domain users within that group will all be added to 3PS Network Server at the same time. To view the whole users within this group, please select  and enable the **“Show users in domain groups.”** The account information of these domain users, unlike those user accounts you add one by one to 3PS Network Server, are not editable on Users page.


☒ Show users in domain groups.						
User Type	User Account	User Name	Password	Email	Group Name	
Customized User	admin	Admin	*****		Administrator	
Domain User	Deckard Can	Deckard Can		Deckard Can@inaxsys.com	\$Security Office	
Domain User	John Bourne	John Bourne		John Bourne@inaxsys.com	\$Security Office	
Domain User	Steve Lin	Steve Lin		Steve Lin@inaxsys.com	\$Security Office	
Domain User	Joyce Holiday	Joyce Holiday		Joyce Holiday@inaxsys.com	General Service	

Domain users added as a whole group


- Assign **3PS Network Server Permissions** for created group. This will define what functions this User group is allowed to access. By default, a new User group will initially be allowed to access only **Live View** page and **Playback** page, but without any permission to any device setting, so you will have to assign the device permissions later.

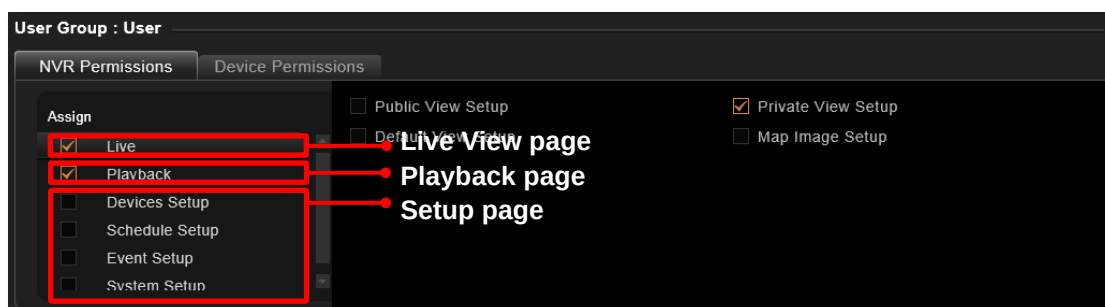

- Assign **Device Permissions** for created group. This will define which devices this User groups is allowed to access. If this User group is allowed to access all newly-added devices, check **“New Device Default”** and edit the permissions, these default settings will be applied to any device added in the future.

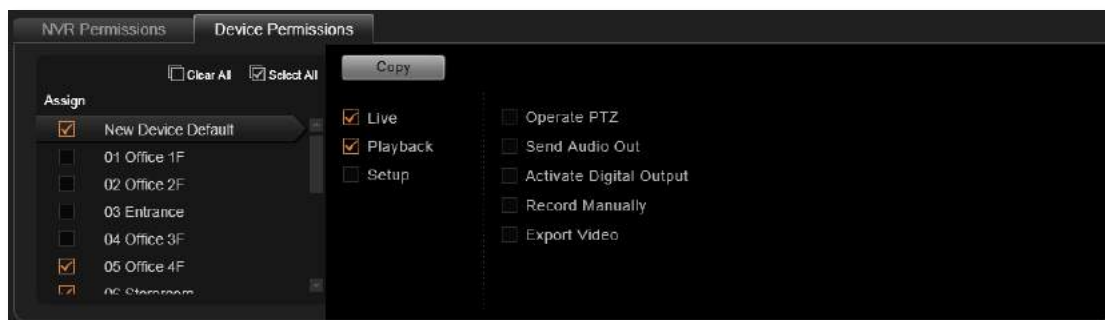

You may copy the **Device Permissions Settings** to other devices. Click “**Copy**” under **Device Permissions** tab to bring up the target device menu, check the target devices, and click “**Apply**”.

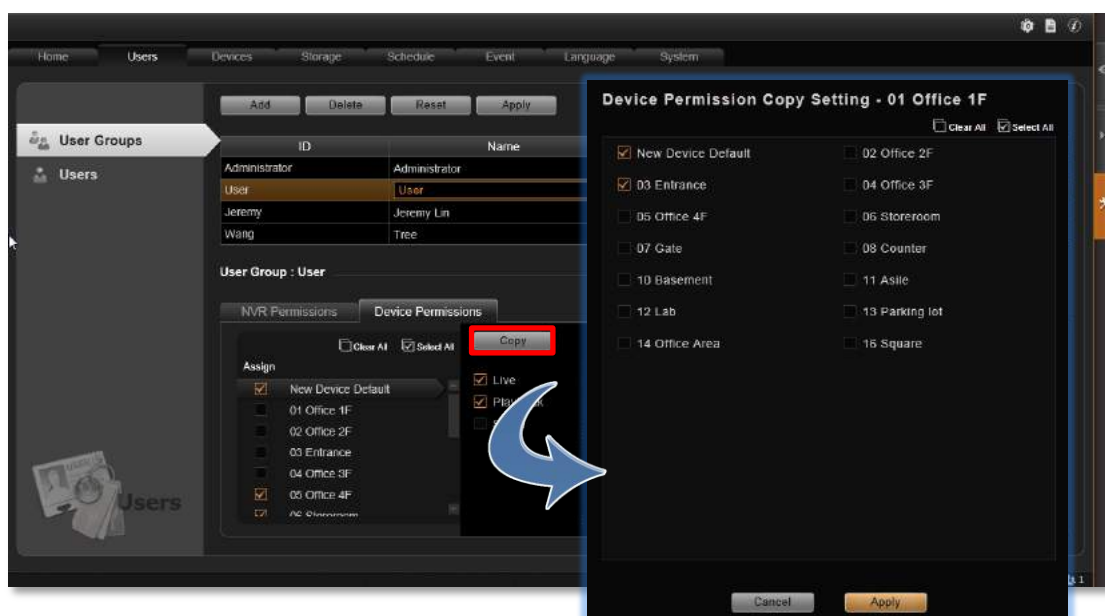


Click “**Apply**” on top to save the settings.

Add Users

To create a user account with on 3PS Network Server.

1. Select  **Users**, and click **Add** button.
2. Select **User Type** as **Customized User** or **Domain User**.
 - **Customized User**: an account created and managed on 3PS Network Server only. You will input an account name, its password and email address for this User.
 - **Domain User**: an account that already exists in Active Directory database within the domain. Since this is an existing account in your domain, you will have to select this account from **Account** dropdown list.
3. Insert user account, name, password, and the account mail (For **Customized User**).
4. Assign this created user account to a specific user group.
5. After you click “**Apply**”, this new user will be added to the list on top.

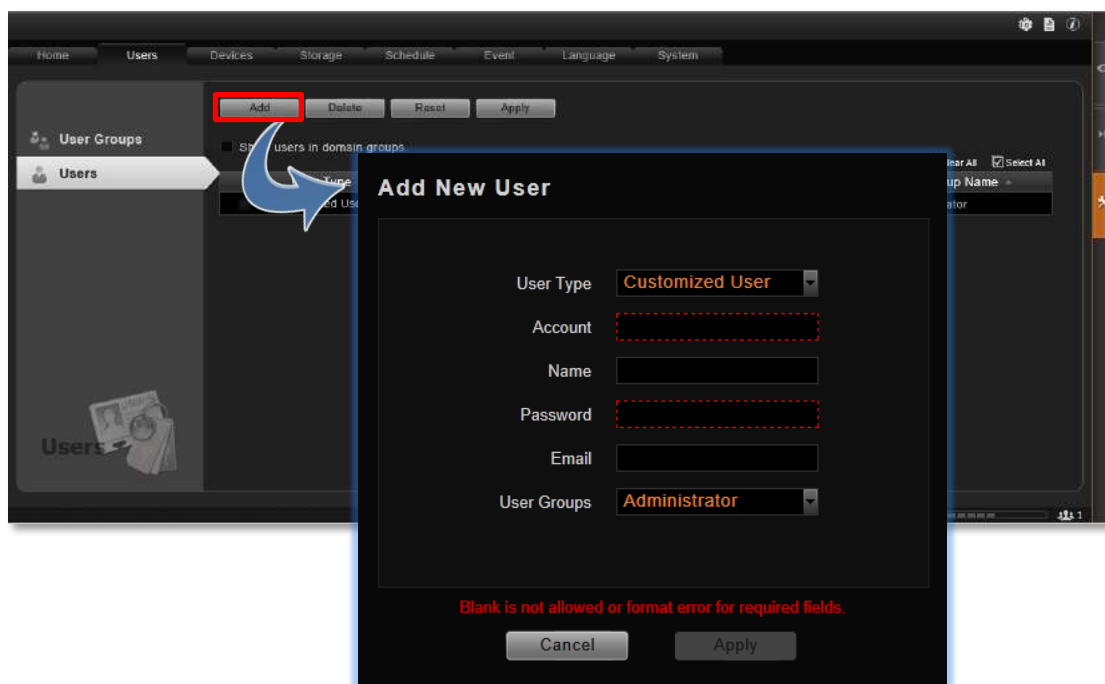

Note

3PS Network Server provides a procedure to help Users who have forgotten the password retrieving the original information, which relies solely on the “e-mail address” authentication. It is strongly recommended that you input an email address that this User has access to when you establish the User account. To update the e-mail address of an account, go to **Setup** page → **Users** tab → edit “**Email**” of an selected User account; the Users can also update the email addresses themselves after logging in to 3PS Network Server on **Live View** page →  → **Update Profile**

Note

Account /Password Rules


1. **Account** and **Password** fields allow alphabets, numbers, and symbols except the following: `/ \ [] : ; | = , + * ? < > " ' ``
2. In **Account** field, for alphabets, the input will be recognized as lowercase letters. Space is only allowed between characters; the space in the beginning or at the end will be deleted as it is saved.
3. The **Password** field is case-sensitive, and the space is allowed.

Note

admin is the default user account and belongs to “**Administrator**” user group. Hence, the user **admin** and the group **Administrator** cannot be deleted; it possesses full permissions to all devices and 3PS Network Server settings.

Domain Users Management

As 3PS Network Server computer is logged on to a domain Active Directory, it can import a user account from Active Directory.

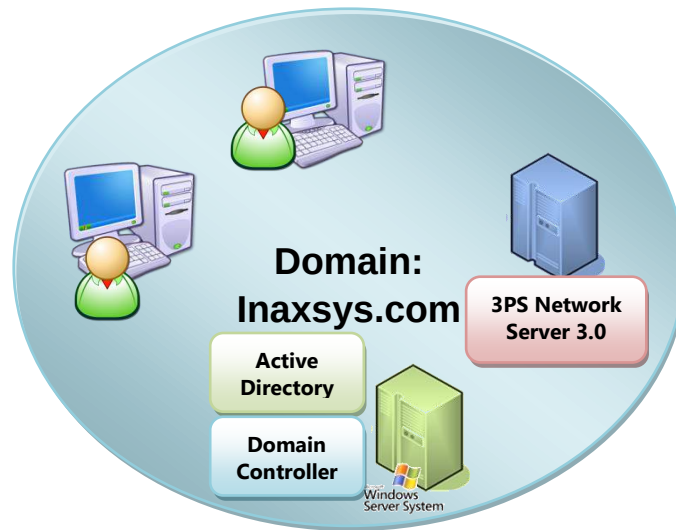

This type of User account is “**Domain User**”. Upon being added to 3PS Network Server, the User properties stored on Active Directory database including (1) account name (2) email address will be imported to 3PS Network Server.



Whenever a domain User client tries to log in to 3PS Network Server, 3PS Network Server will first verify if this account exists in 3PS Network Server database, and then have Active Directory verify the user account and password.

As Active Directory owns the privilege to create, edit and delete domain users, **the Domain User's account and password are not editable through 3PS Network Server user interface but via Active Directory Administrative Tool.**


Customize Views

After all devices are configured, you may start customizing the views for different users and purposes. This chapter will teach you how to add video source, arrange the channels and manage live view layouts.

In 3PS Network Server 3.0 system, a **View** refers to the layout where the live images of **Cameras** or **Maps** are placed in proper positions to suit the monitoring purpose. This is very similar to a camera group, which often consists of cameras in the same physical location. For example, a View named **11F Emap & Camera** may contain the 11F floor plan and the cameras actually placed on 11F.

On 3PS Network Server Live View, a saved View not only remembers (1) layout style, (2) which channel to display which camera, (3) but the fisheye view mode (for fisheye cameras only).

Live View interface overview

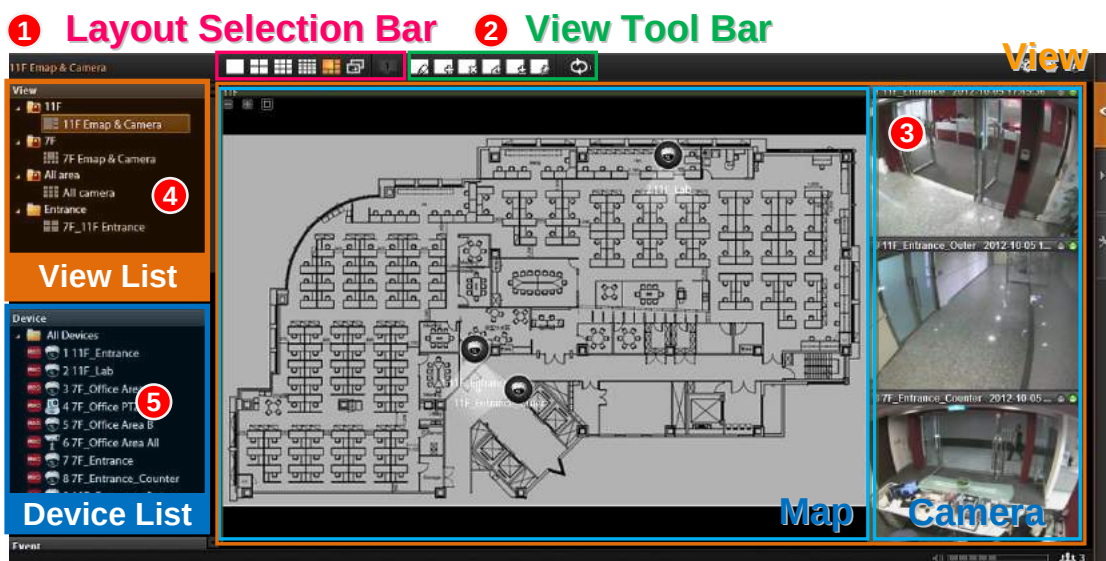


1. **Layout Selection Bar:** Provides 24 options for layout styles.
2. **View Tool Bar:** Provides functions keys for editing.
3. **Channels:** Each channel window may display a camera view or a map. In edit mode, you can adjust the channel size at will.
4. **View List:** All the saved Views are shown here. On **Live View**, you can go to  → **View Manager** to group and manage these views (refer to Manage the Views on page 98).
5. **Device List:** In edit mode, drag camera from here to your desired channel.

Step 1: Create a New View

On **View Tool Bar**, click the **Create View** button , input the **View Name**, add a **New Group** for this View and decide whether this group is to be **Public** or **Private**, and then click **“Apply”**.

□ The views under **Private View Group**  are only available to the User who created them.

□ The views under **Public View Group**  are open to every User.

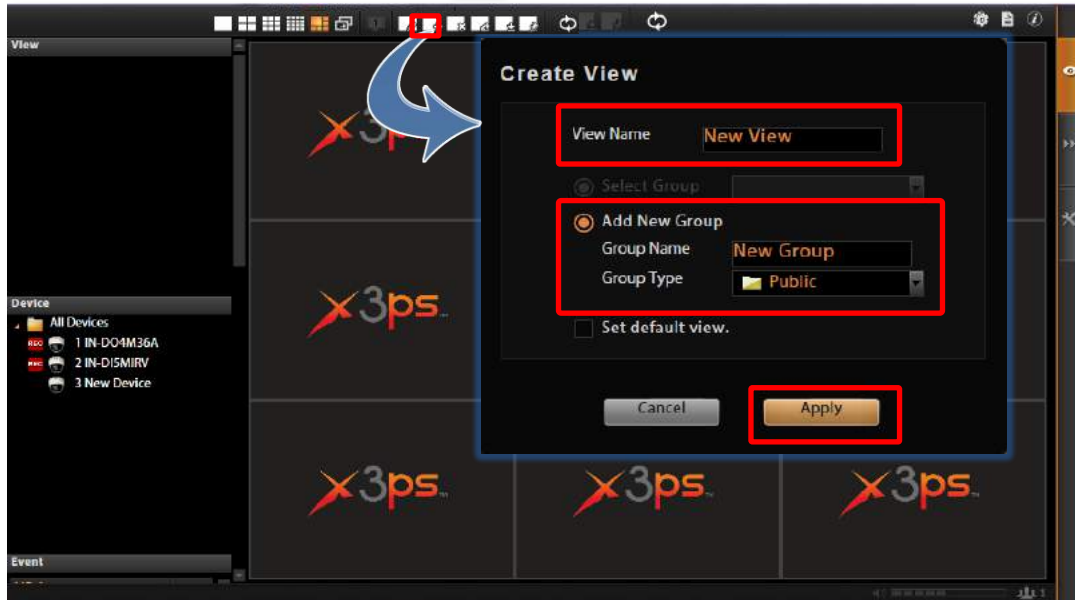

Step 2: Enter Edit Mode


On **View Tool Bar**, click the **Edit View** button , this view will turn into edit mode. In edit mode, you may add a video source to a channel, and adjust the channel size.

Step 3: Select a Layout


On **Layout Selection Bar**, click the **Expand** button  for all provided layout styles. Select a layout that is perfect for your required channel number and ideal arrangement.




Step 4: Add Video Source

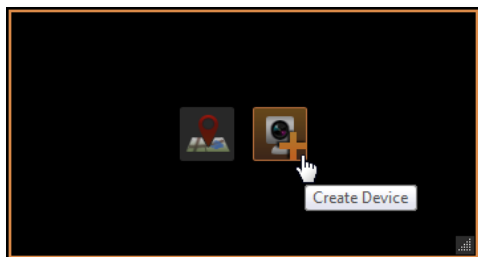

In edit mode, move the mouse over the channel and click . You may also directly pull a camera from the **Device** panel to your desired channel.

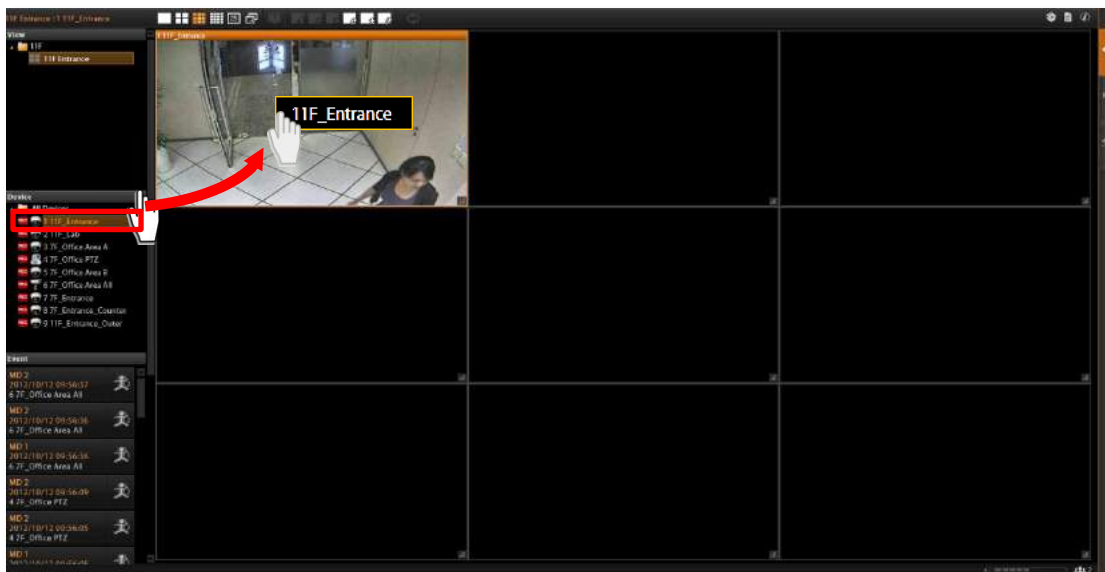


❑ **Remove the camera view:** right-click on the channel and elect “**Remove**”.

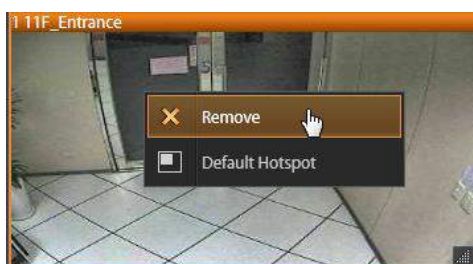


Step 5: Add a Map

By adding a map, you put a picture on the channel, where you may place camera icons to make it an “e-Map”.

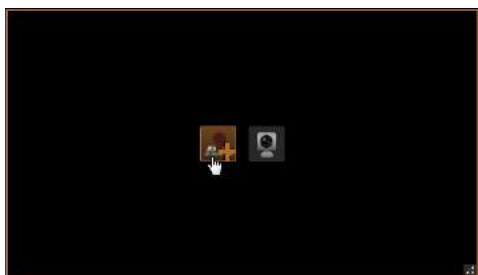

In edit mode, move the mouse over the channel and click  to upload a map. Please input the **Map Name**, select the image location (file format must be JPG) and click “**Apply**”.

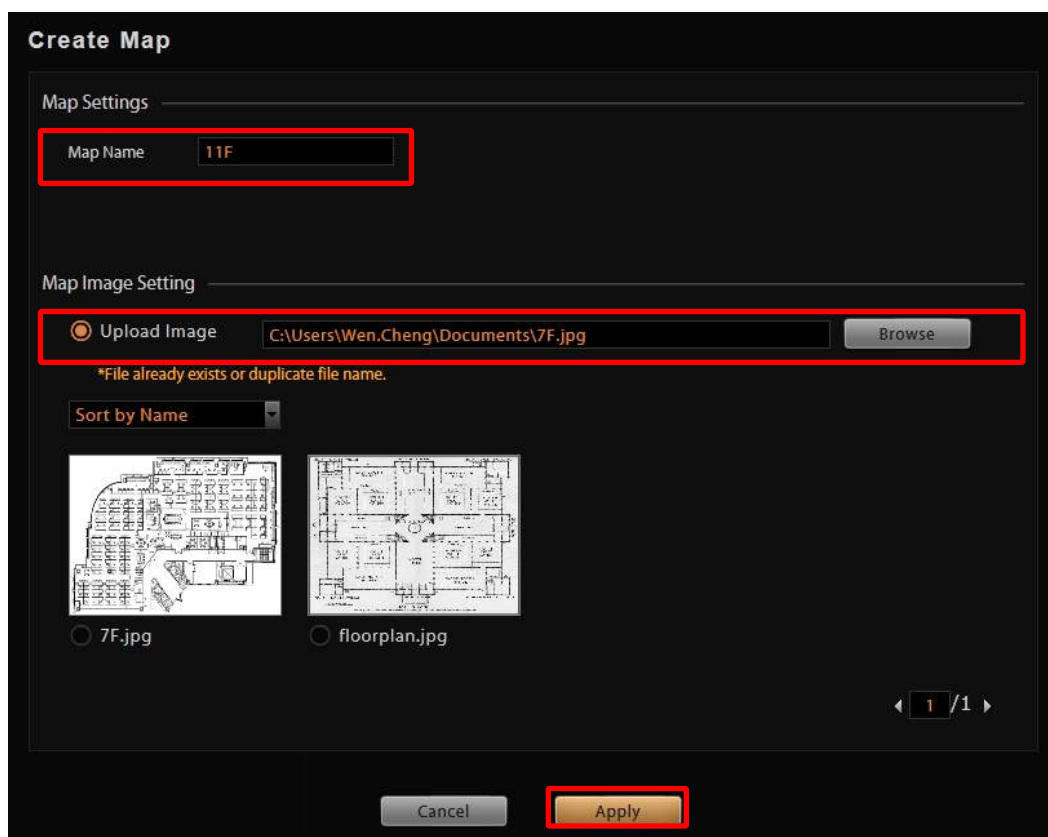


Map brightness:


To change the map brightness, right-click on the map, select "Map Mask" and the brightness percentage level.



Map size:

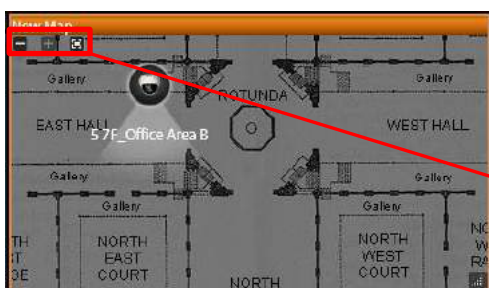

By default, the map will be displayed in its original size. Use the buttons on upper left to adjust the map size.



Edit map title:


The map title will be shown on channel title bar. In edit mode, right-click on a map channel and select "Edit Map Information"

Remove the whole map:

Right-click on the map and select "Remove".


Manage maps:

All the uploaded images are managed under **Map Image Manager**. On **Live View** screen, you may go to  → **Map Image Manager** to view, upload or delete the maps.

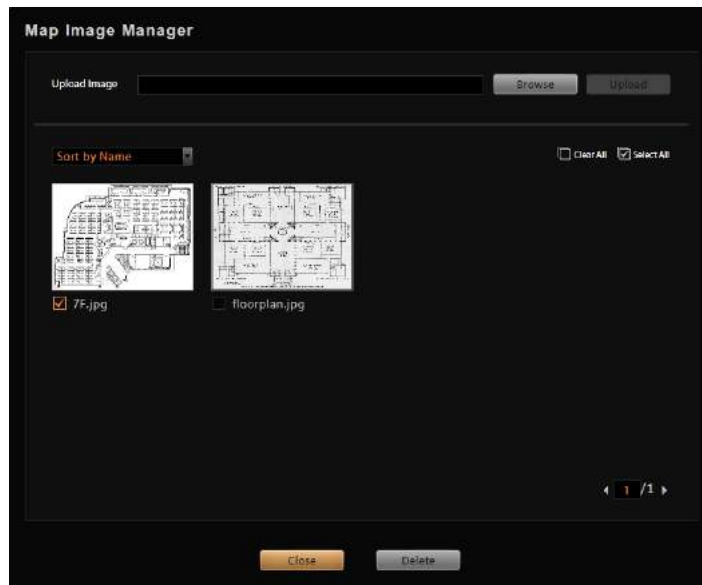

Step 6: Add Devices to the Map

Pull a device from **Device List** to the map.

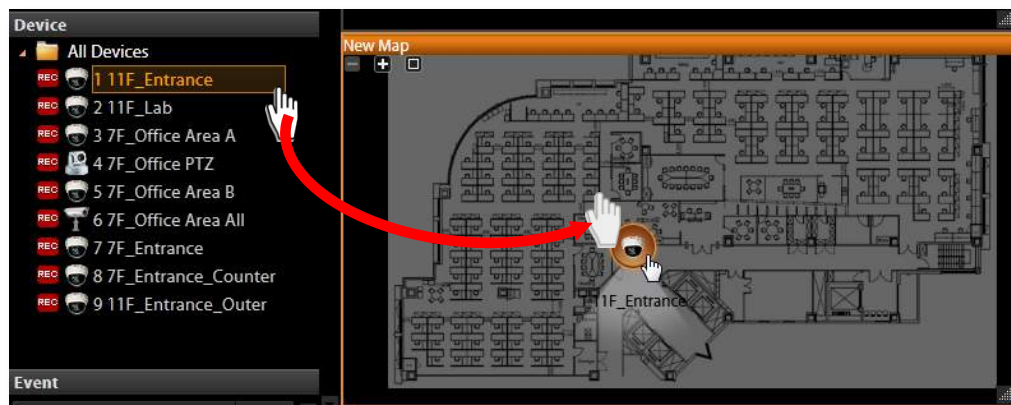

- To remove this device from map:
Click 
- To move this device:
Left-click on the device icon and drag.
- To turn the pointed direction:
Mouse over the viewing angle area, left-click on the clockwise arrow to turn the direction.




•To adjust precise pointed direction:
Right-click on the device icon, select
“**Pointed Direction**”.

•To adjust device's viewing angle:
Right-click on the device icon, select
“**Vision Angle**”.

Step 7: Adjust the Channel Size & Layout


□Adjust the channel size:

Click  on right lower corner of the channel window, drag and then release.

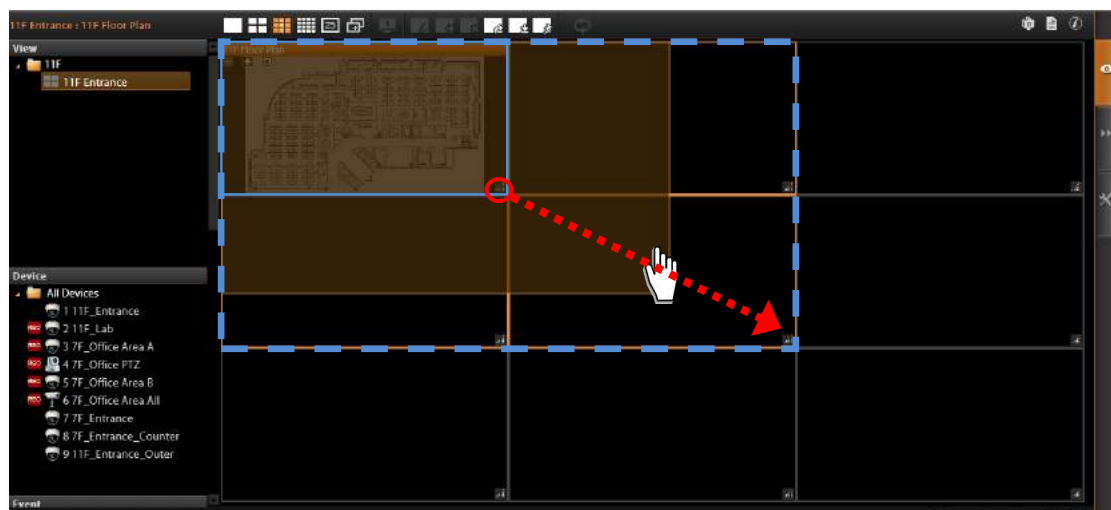

□Switch channel windows:

Click on a channel title until the cross arrow  appears, hold it to drag this device or map to your desired channel.

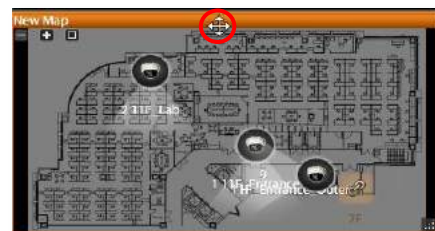


Step 8: Save the View

Click  on **View Tool Bar** to save it.

Step 9: Set Default View

To set a View as default, select it in the **View List** panel and then click  on **View Tool Bar**.
By next time you log in, you will directly enter this View.

Step 10: Set Default Hotspot Channel (Optional)

By system default, the global hotspot channel will always be the top left one. You can set any other channel on your live view screen to be the default hotspot channel. Right-click on the channel and select “**Default Hotspot**”  then click  on **View Tool Bar** to save it.

Step 11: Set Fisheye Camera Mode

Define a view for a fisheye camera channel by selecting its mode and using ePTZ control. Please note that the maximum number of fisheye channels on the same View is **16**.


1. On this channel, right-click to bring up channel menu, click “**Fisheye Mode**” and select one mode.




2. After the fisheye mode is selected, click the entire channel or a region of interest.

●Use **PTZ Panel** controls to operate PTZ movements:

ePTZ Controls on PTZ Panel

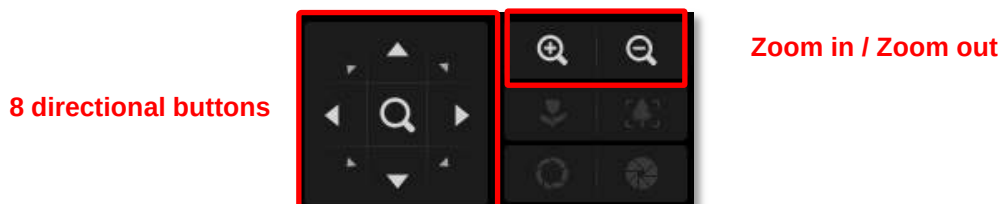

- Click the mouse anywhere on the view to pan/tilt, scroll the mouse wheel to zoom in/out.



- To reset the ePTZ navigation area back to default viewing angle, right-click to bring up channel menu, and then click **“Reset”**.

3. click  on **View Tool Bar** to save the configuration.


Note

Once a channel is changed to any of the following fisheye modes: **Dewarping, Panorama, Double Panorama, Panorama/Focus** or **Quad**, the resolution of this live stream will become 1920x1080, while 3PS Network Server still records the live stream at the resolution you set on **Setup** page.

Manage the Views

Each View belongs to a specific **View Group**. With the group management, 3PS Network Server 3.0 makes it easy to deal with Views you created for multiple Users.


After you created and saved the Views on **Live View** screen, click  → **View Manager**.

- 1 Click on the right arrow icon in front of a group folder to reveal its **Views**.
- 2 By selecting a **View**, you may directly modify its name in **Name** field.
- 3 You may change a group's **Group Type**. Upon the change, for example, by changing a group from **“Private”** to **“Public”**, all the views belonging to it will be open to every User.
- 4 Click this icon to add a new group.  **New Group**  **Public**
- 5 Click this icon to delete a selected group.
- 6 Click this icon to copy a selected group to another group.
- 7 Click this icon to move a selected group to another group.



Set View Link


By creating a link button on a view, you can directly be linked to another specific view. On the picture below shows how to create a link button to 7F View on 11F View.

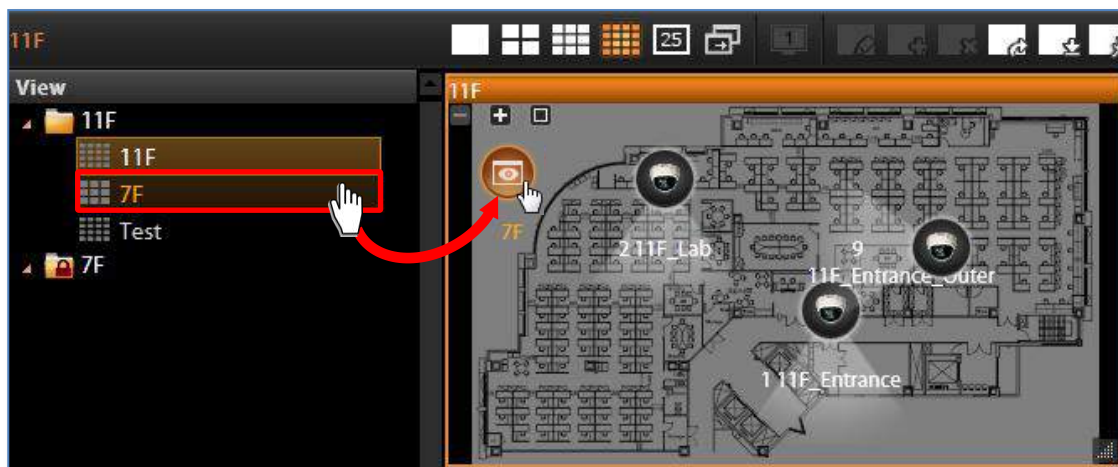

1. Select a View, on which you will place a link button to another view.
2. Click  on **View Tool Bar** to enter edit mode.
3. From **View List**, drag the target View to current View, a link button will appear.
4. Click  on **View Tool Bar** to save it.


Set View Patrol

You may have the saved Views patrol in turns. In this way, the views in different area in your site may cycle through themselves for you automatically.

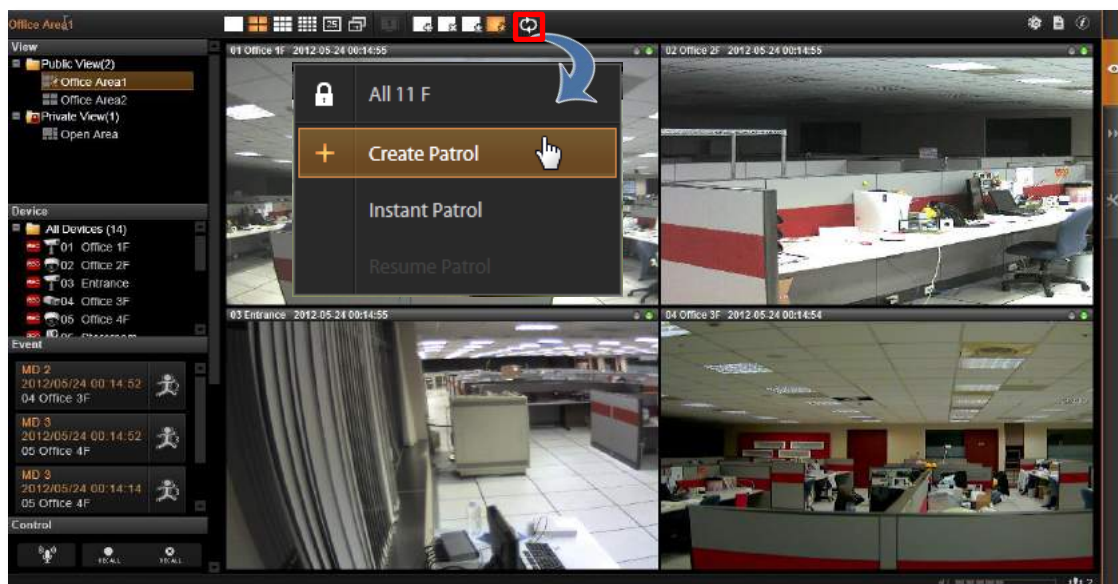

On **View Tool Bar**, click  then **Create Patrol**.

1. Input the **Patrol Name**
2. Select the **Patrol Type** to be either available for all Users or to the creator's account only.
3. Define the **Global Dwell Time** between the views. If you want to set different dwell time length for individual Views, do not check this option, and configure them separately in the table below.
4. Choose the **Views** to display in patrol. If you select the **All Device** group, you will also need to select "**All Device Layout Style**" for it.
5. Click "**Apply**" to save the settings.

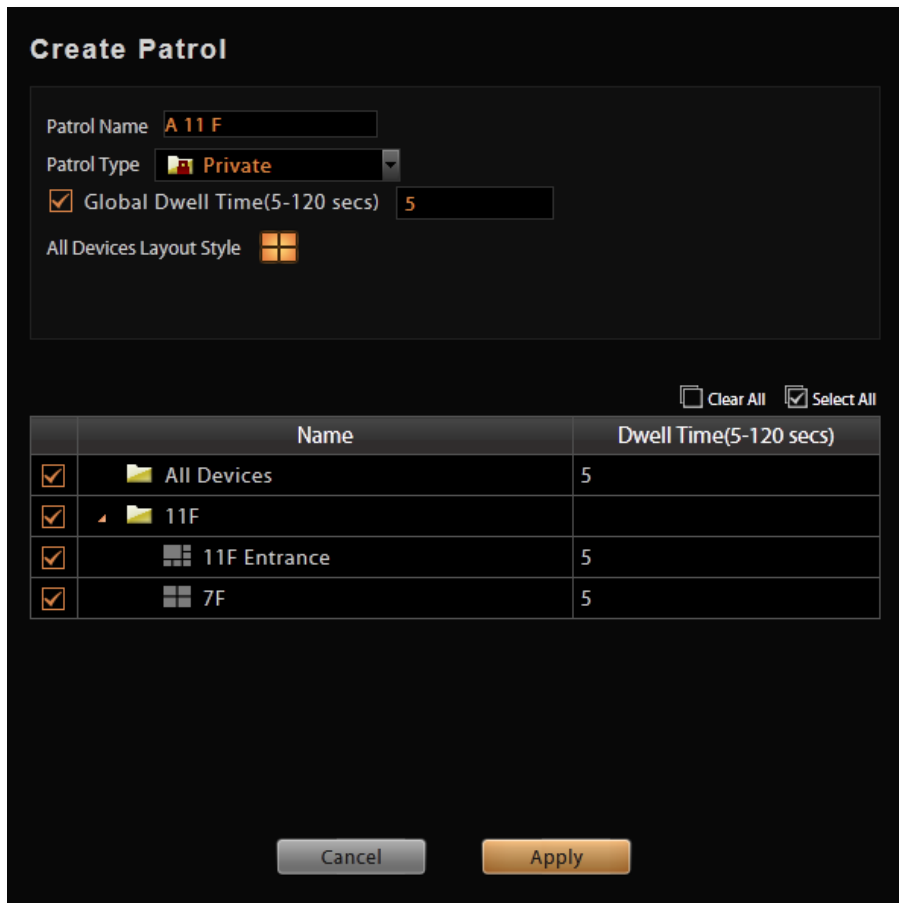

Create Patrol

Patrol Name:

Patrol Type:  **Private**

☒ Global Dwell Time(5-120 secs)

All Devices Layout Style: 

☐ Clear All ☒ Select All

	Name	Dwell Time(5-120 secs)
☒	 All Devices	5
☒	 11F	
☒	 11F Entrance	5
☒	 7F	5

6. The saved patrols will be shown on the patrol list after you click  on **View Tool Bar**, you may delete and edit a saved patrol or select it to start patrolling.




Tips to Enhance Live View Performance


Live view for multiple channels requires sufficient computing power to run the performance. In certain extreme cases, like when viewing several megapixel H.264 video streams at the same time, client computer will be overloaded and hence affect browser's performance. This is a common limitation imposed upon all Windows based video management programs and web browser.

To enhance live view performance, below are several tips you may try:

1. Use dual stream mode for those devices supporting this function. Enable the dual stream mode and use the stream of lower resolution/frame rate/bit rate for live view, and megapixel resolution stream for recording.
2. Use another browser client to share these high-resolution channels. Given that there are 32 megapixel channels to be monitored, you may have Layout 1 to display channel 1~16, set Layout 2 to display channel 17~32, then open one browser client to show Layout 1 and the second browser on an extended monitor to show Layout 2.
3. Have 3PS Network Server automatically decode only I frame for live view stream when system loading is high. Go to **Setup** page → **System** tab → **Settings** → **Display Performance Settings** for the settings. You may choose to enable the **Decode I frame** function under either or both of the conditions: when current layout is displaying channels above certain number, or when the CPU usage is above certain percentage. This setting will be applied to all web clients or Workstation clients.

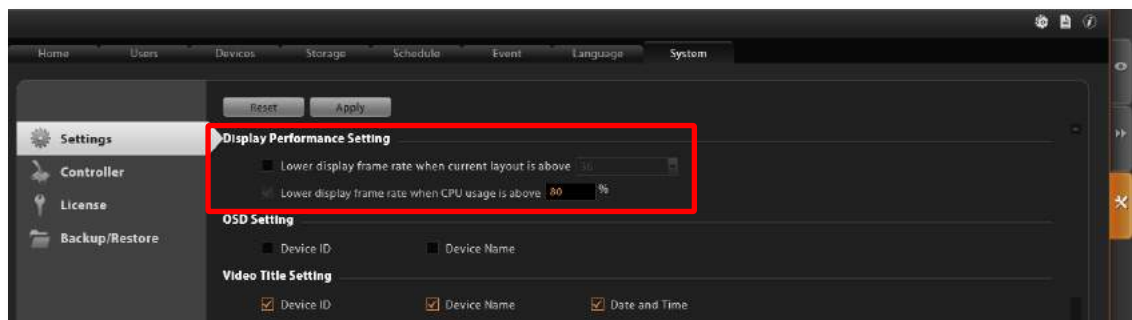

A **Workstation** client computer can have its own specific display configuration without being affected by 3PS Network Server universal setting. Log in as **3PS Network Server Workstation** client, go to **Setup** page → **System** tab → **Workstation** and configure the

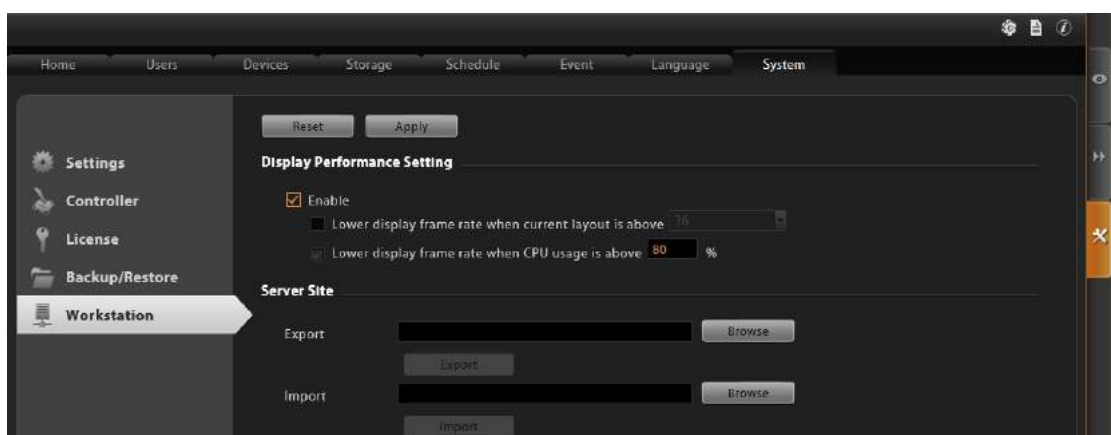

Display Performance Setting.

Let Windows Automatically Start with 3PS Network Server Live View

You may have the client application automatically run and open the live view after Windows starts. In this way, you may save steps and time before you eventually see the desired live view screen. Additionally, whenever a power breakdown takes place, the live view may recover as soon as your computer resumes.

If more than one users would log in to this computer, this tip might not be suitable due to account security issues.

1. On 3PS Network Server 3.0, set a **default View** for your account. For detailed procedures, please refer to this section in this manual: [Customize Views](#) on page 91.
2. Set **Auto-login** for your Workstation client or web browser client. For detailed procedures, please refer to this section in this manual: C. Remember _on page 31.
3. If you are using a browser client, open the browser, and set the 3PS Network Server ip as default homepage.
4. Set your browser or Workstation application to start right after Windows has started. Click **Windows Start → Programs → Startup** to open the **Startup** folder, and drag the application shortcut into it. In your case, you will have to drag the Internet Explorer shortcut or 3PS Network Server Workstation shortcut into the **Startup** folder.
5. The next time you start Windows, 3PS Network Server 3.0 live view will be running automatically, and you may start monitoring the system in no time.




Customize System Language


3PS Network Server supports multiple languages for user interface display. There are already **10** translated language files in the server system. Each language is open to customization based on your own needs. This section will describe how to choose or customize language strings for your site.

System Languages List

You may decide which languages to be selectable on Login screen. The chosen languages will appear on the “**Language**” dropdown list.

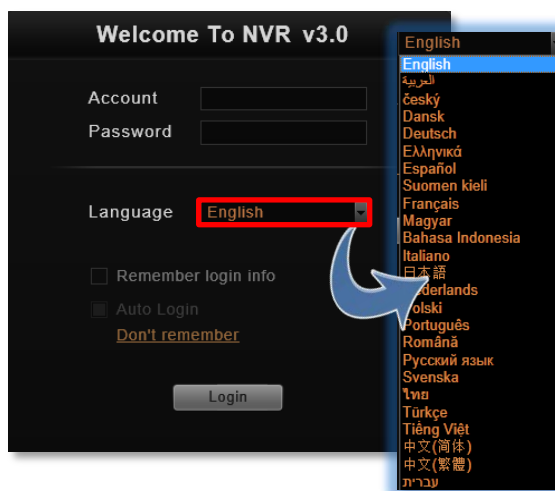

Go to **Setup** page → **Language** tab, click “**Active Languages**”. On popup window, check the languages you need, and click “**Apply**”. By default, all languages are selected, as the default system language, **English** and **Traditional Chinese** are not removable from this list.

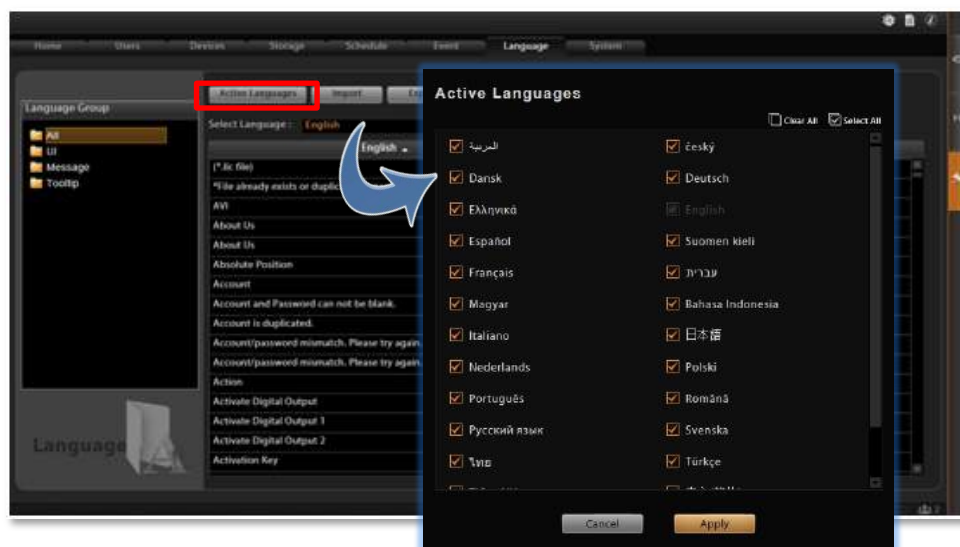


Edit User Interface Wordings


Each language file contains four editable string tables. Each table displays the default wordings in English and the translation in target language.

To view each table:


1. Select the language from “**Select Language**” dropdown list, then select a table from the “**Language List**” list on the left column.

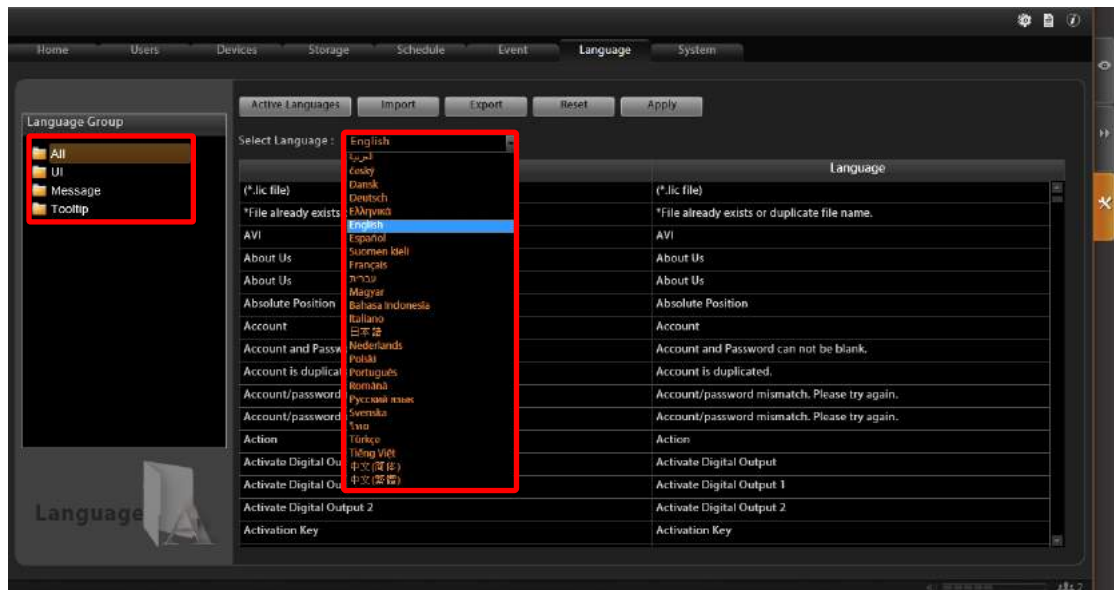

2. Your target language will be displayed on the right column, while the default system language “**English**” appears on the left for reference. Click in any field on right column to customize your desired wordings, and click “**Apply**” to overwrite the current.

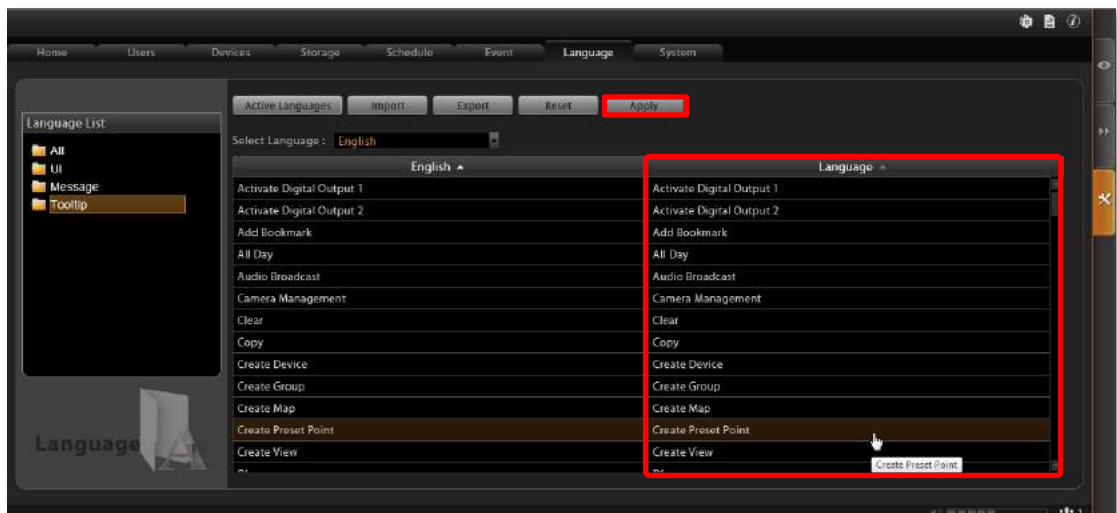

The new string will be applied by next time you log in. If you log in as a **3PS Network Server Workstation client**, please press  button on **Login** page to synchronize with the latest modified language file, then log in to the system.

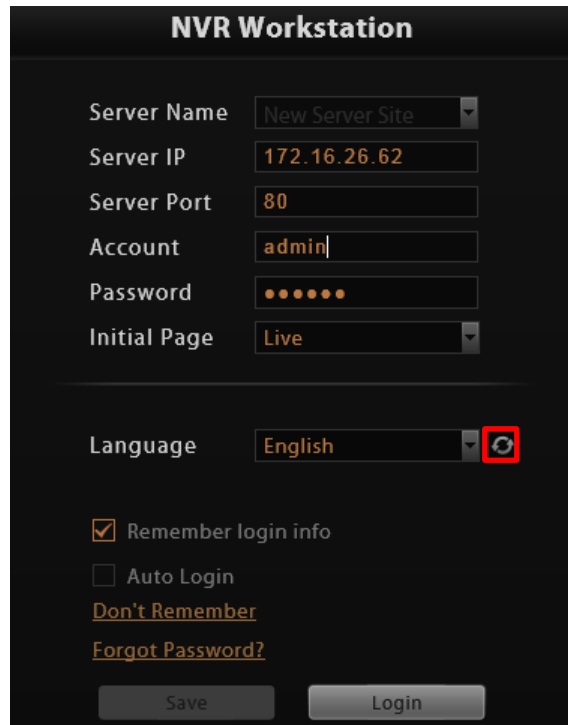

NVR Workstation

Server Name:

Server IP:

Server Port:

Account:

Password:

Initial Page:

Language: 

☒ Remember login info


☐ Auto Login

[Don't Remember](#)

[Forgot Password?](#)

Export / Import Language String File


You may also click “**Export**” to export the language file as .xml format to edit in **Notepad**, or “**Import**” to import a language file to use in the system.

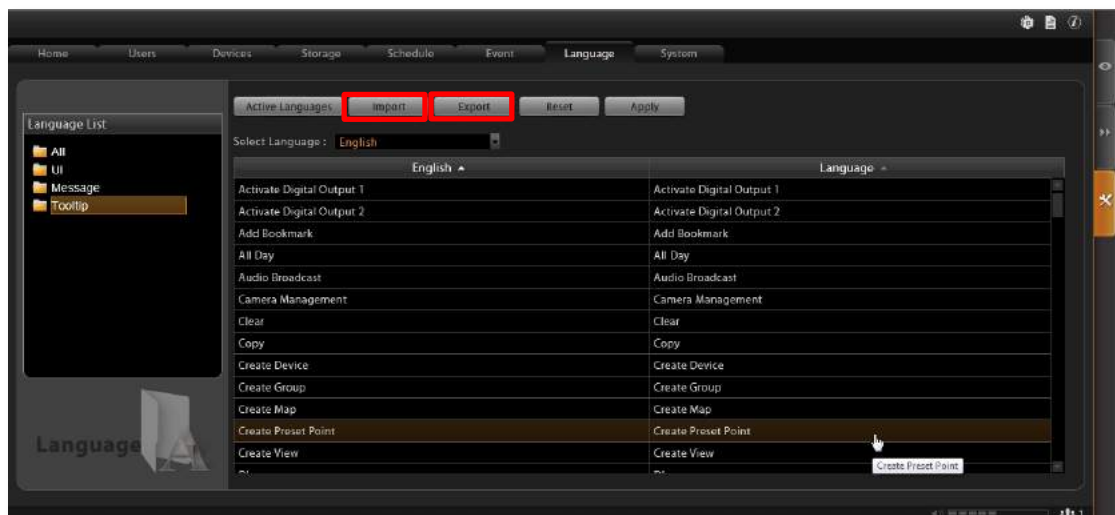

In general, it is suggested that you always save a modified language table with a different file name in a location other than default system language folder *C:\Program Files\Inaxsys\NVR3\Language*, then import it to use. In this way, you can avoid overwriting the original language file.

Display Configurations

You can change the user interface style by arranging the main screen and **Panel/Device List** on the right or left. Go to **Setup** page→**System** tab→**Settings**, in **User Interface Style** section, select the setting style then click “**Apply**”. The change will be applied upon your next login.

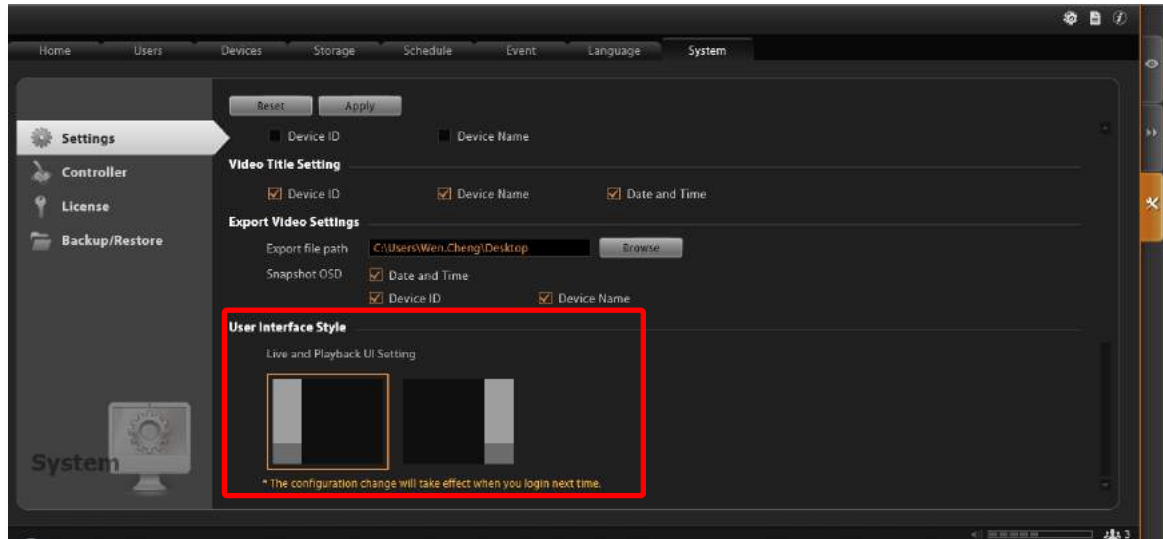


Video & Snapshot Export Configurations

The snapshots taken by Users on **Live View** and all exported video files are saved to a default file location, and you may configure the destination on 3PS Network Server. Go to **Setup** page→**System** tab→**Settings**, in **Export Video Settings** section, click **“Browse”** to choose the Export file path.

You may also define what information is printed on each snapshot by checking the items: **Date and time**, **Device ID** and **Device Name**.

These configurations will take place after you click **“Apply”**.

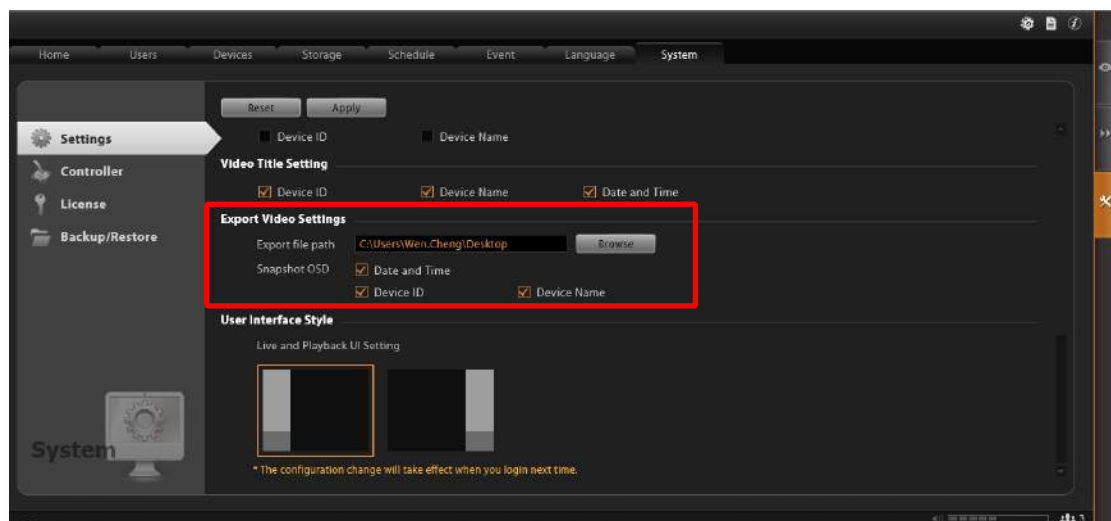

Joystick

On 3PS Network Server 3.0, other than user interface PTZ panel and mouse operation, you may also control the PTZ movements by physical controllers. 3PS Network Server 3.0 supports two types of controllers, which both feature in a joystick and twelve buttons for users to assign specific actions.




Model: **IP Desktop**
Manufacturer: CH Products



Model: **Extreme™ 3D Pro**
Manufacturer: Logitech

Joystick Configurations

1. Log out from 3PS Network Server.
2. Connect the controller device to your computer. To make sure the device is installed properly, open **Windows Start menu** and enter **Devices and Printers** to check the status.
3. Log in to 3PS Network Server, go to **Setup** page → **System** tab, enter “**Controller**” section and select your product.
4. You may assign specific commands from dropdown list to buttons 1~12 of the controller. When setting is done, click “**Apply**”. The modification you did on one controller model will be applied to the other joystick model as well.

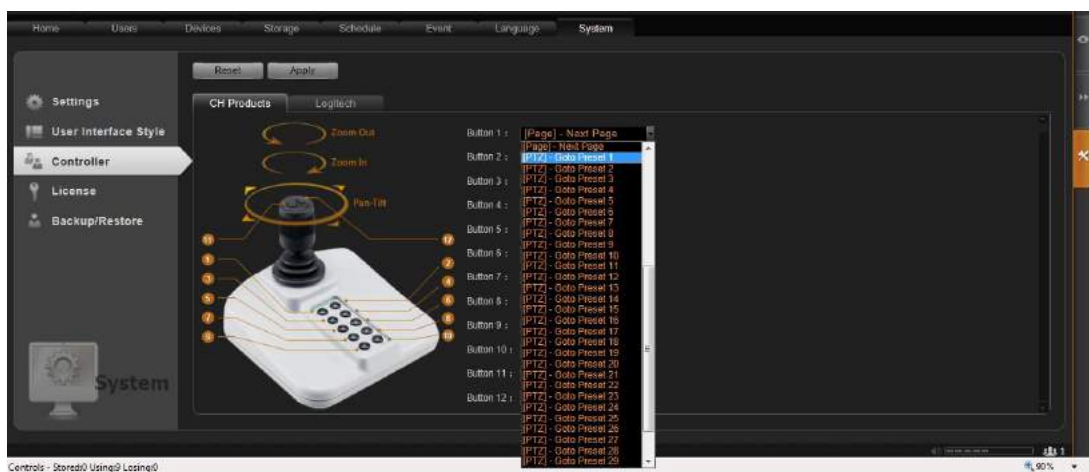

5. To validate its function, go to **Live View** page and focus on a PTZ device channel to operate the supported PTZ operations.


Un-install Server Software

In certain cases, un-installation of 3PS Network Server system is necessary, for example, (1) you want to terminate 3PS Network Server and clear all the evidence due to privacy and security reasons, (2) you need to reinstall the system due to an unsuccessful installation.


Before starting un-installation, please back up important data (please refer to Back Up System Data on page 111) first and prepare the 3PS Network Server install shield application. This chapter will describe un-installation process.

Step 1: Remove 3PS Network Server 3.0 Program

1. Go to **Windows Control Panel**→ **Add/Remove Programs** (in Windows Server 2003/Windows XP) or **Programs**→ **Programs and Features** (in Windows Vista /Windows 7/Windows 2008) to remove it. When you un-install 3PS Network Server program, the web client will be terminated at the same time.

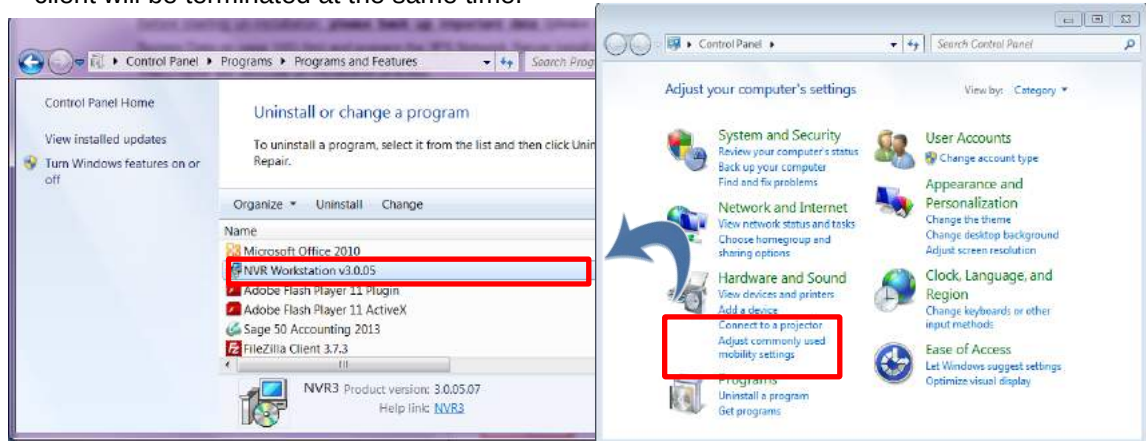

2. After you choose to uninstall “**3PS Network Server v3.0.02**” program, the uninstallshield will execute and notify you when it is completed.

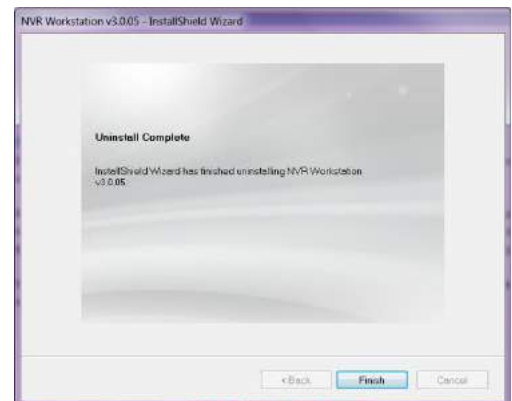


Step 2: Remove 3PS Network Server 3.0 Program Folder (Optional)

If you are performing a complete un-installation without leaving any 3PS Network Server related data on the current computer, you may consider deleting this folder.


After un-installation, the **3PS Network Server** system folder will remain under Inaxsys product folder on your hard drive, the system configuration data here will not be removed until you delete them manually. By default, the path of **3PS Network Server** system folder is *C:\Program Files\Inaxsys*.

However, keeping this folder is convenient for a un-installation followed by an instant re-installation, for the previous system settings can directly be applied to the new server.

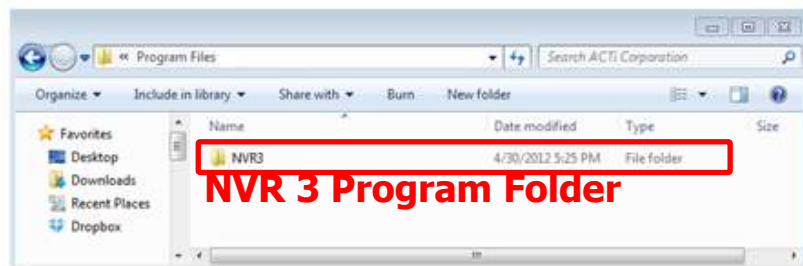

Step 3: Remove the Recordings Folder (Optional)

Remove the whole **Recordings** folder(s) that saves the recorded video files on storage hard drive(s). If you selected multiple storage hard drives via **Setup** page → **Storage** tab → “**Disk Drive List**”, then the server may have generated one **Recordings** folder under each selected drive. If you have renamed the folders or change the locations, please make sure you find the correct path.

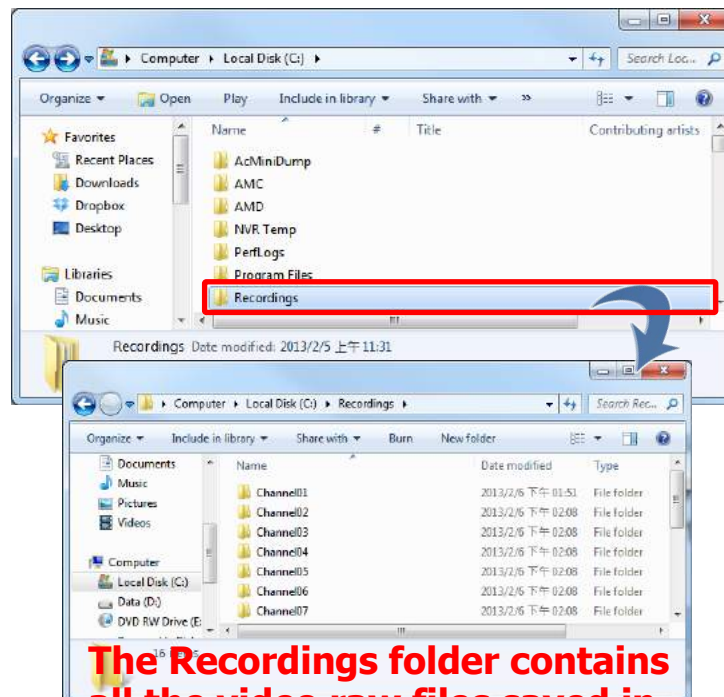

The Recordings folder contains all the video raw files saved in individual channel subfolders.

Back Up System Data

Making regular system backups is always recommended in case of unexpected disasters or accidents that may damage 3PS Network Server. Other than this, you may need to perform an on-demand backing up to (1) migrate the whole 3PS Network Server data to another computer, or (2) re-install the 3PS Network Server on current computer. There are several types of data on 3PS Network Server essential to your surveillance system, please consider your purpose and follow the below instructions to create their backups:

Regular Backup (system settings only)


3PS Network Server can create a backup file of the whole system settings within one click. The settings being backed up include the following properties you set for system: (1) **Users** (2) **Device** (3) **Storage** (4) **Schedule** (5) **Event** (6) **System** → **Settings** / **User Interface Style** / **Joystick**, and (7) the saved **Views** in **Live View** page.

Complete Backup (system settings + video files)

Besides system settings, some organizations may want to back up the video recording occasionally in case that the recording hard drives may fail. The recording files (*.raw) can only be played on the playback utility **Archive Player**.

Step 1: Back up System Settings

1. Go to **Setup** page → **System** tab → **Backup / Restore**
2. In **Backup** section, click "**Browse**" to select the destination for backup file, the file will be saved as *Backup_YYYYMMDD.xml* file. Then click "**Backup**" to export the file.

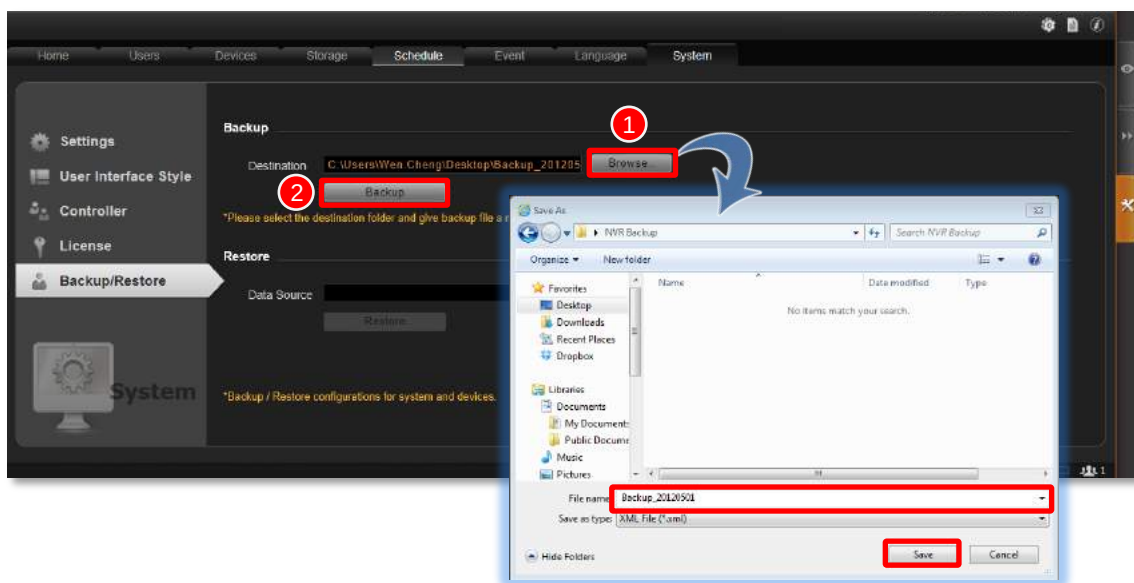


Important Notice

The license data is not included in the system backup file. You have to preserve the license key information provided in email or printed card to you after the purchase takes place.


Step 2: Back up Recording Files Folder (Optional)

Back up the whole **Recordings** folder(s) that saves the recorded video files on storage hard drive(s). If you selected multiple storage hard drives via **Setup** page → **Storage** tab → “**Disk Drive List**”, then the server may have generated one **Recordings** folder under each selected drive. If you have renamed the folders or change the locations, please make sure you find the correct path.

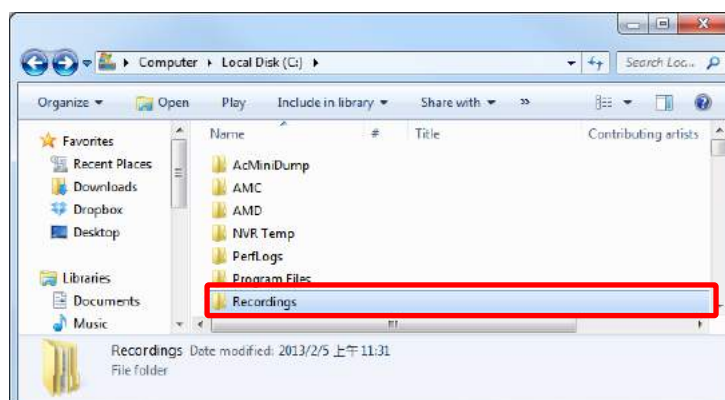

Step 3: Back up Recording Files Index Folder (Optional)

This step is necessary for 3PS Network Server 3.0 migration between two server computers. The recording files index folder contains important video index data 3PS Network Server needs to process recorded video clips. Enter the server program **NVR3\DataSource**, and back up the **DataBase** folder (where stores the recording files index data).

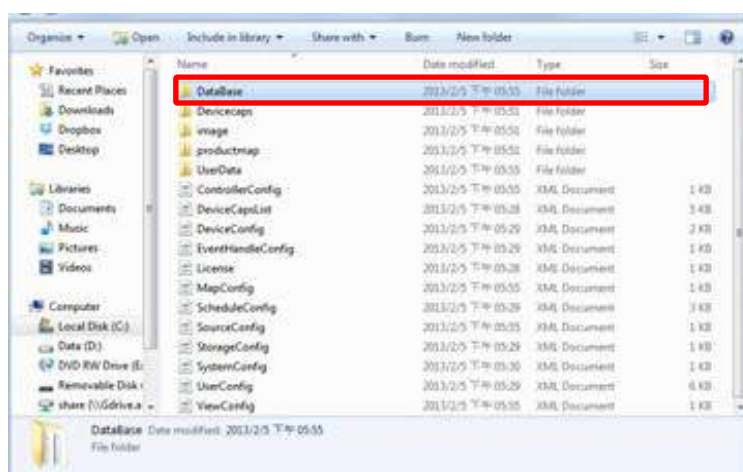

Step 4: System Log (Optional)

The system log records the operations Users perform during logging in to 3PS Network Server. You may export the system log of latest three days as *.csv file as backup. Please refer to the section in this manual: [Export the Log](#) on page 82 for instructions.


Restore System Data

Before starting restoring the system, make sure you have done the following:


- (1) **Re-activate the license.** If you have done un-installation previously, and the number of channels to be recovered is over **16**. Please prepare the license key information for online activation or the activation file(.lic) for offline activation, and follow the instructions in License and Activation on page 22 to activate your license. The license should be activated before settings are restored so that the licensed channels are ready for recovery.
- (2) The backup file(.xml).

To start,

1. Go to **Setup** page → **System** tab → **Backup / Restore**
2. In **Restore** section, Click "**Browse**" to select the backup file, and then click "**Restore**" to start restoring the settings.

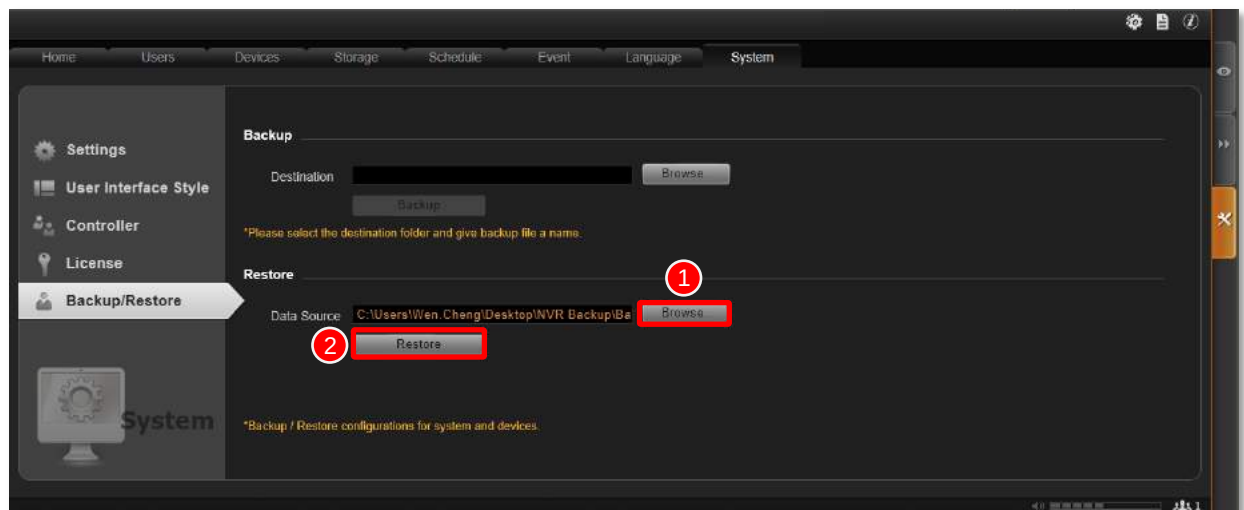

3. The restoring process requires logging out of 3PS Network Server. After restoring is done, you may log in using your previous user account properties.

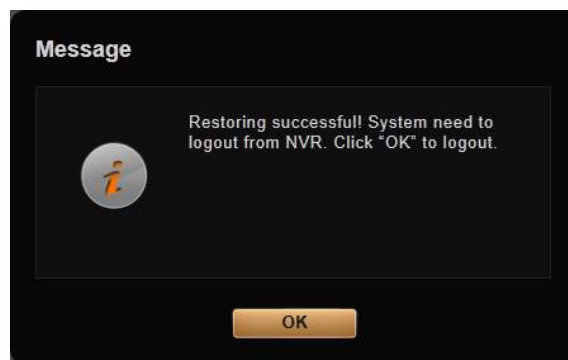

System Migration

3PS Network Server system migration is necessary when there is a need to upgrade your 3PS Network Server for functions supported in newer version, or a replacement of current server computer. The migration process will involve a series of different procedures including backup, un-installation, installation and restoration, which should be executed carefully to prevent from loss of important data. You should go through the instructions of required procedures before the migration starts. This chapter will lead you through the procedures for managing a safe migration process.

Migrate from 3PS Network Server 2.3 to 3PS Network Server 3.0

The 3PS Network Server 3.0 has a disparate database structure from previous 3PS Network Server systems. Therefore, the backup files and video files created from 3PS Network Server 2.3 are not compatible with 3PS Network Server 3.0.

Inaxsys provides a backup converter utility to create a system settings backup directly from 3PS Network Server 2.3.03 for 3PS Network Server 3.0 to restore, in this way, you may directly carry the whole server settings to 3PS Network Server 3.0 system with a single backup file.

Therefore, if you are currently using a 3PS Network Server 2.x product (Enterprise or Professional), please upgrade it to 2.3.03 or later versions.

3PS Network Server 2.3 to 3PS Network Server 3.0 Data Compatibilities

Data Type	Compatibility	Description
License Data	X	The license key for 3PS Network Server 2.3 is not compatible to 3PS Network Server 3.0. If you require more than 16 channels to use on 3PS Network Server 3.0, please contact your system provider to purchase new license key.
System Settings	V	Please download the utility Config Convertor from Inaxsys website and use it to export system settings from 3PS Network Server 2.3 to an 3PS Network Server 3.0 compatible file. The settings for User, Devices, Storage, Schedule, Event and System can be exported as a backup file.
Recording Files	X	Individual video files recorded by 3PS Network Server 2.3 are not playable on 3PS Network Server 3.0. Please make a copy of these recordings and use the playback utility Archive Player to play them.

Please have the following data prepared before the migration takes place: (1) 3PS Network Server 3.0 install shield application file, (2) 3PS Network Server 3.0 license key, (3) 3PS

Network Server 2.3 backup file(.xml), created by **Config Converter**.

To start,

1. Uninstall all 3PS Network Server 2.3 components including **Server** and **Workstation** programs, and then restart the computer. (This step is required when 3PS Network Server 3.0 is to be installed on the same server computer where 3PS Network Server 2.3 locates, as **3PS Network Server 2.3 and 3PS Network Server 3.0 cannot co-exist on the same computer due to system conflict**).
2. Install 3PS Network Server 3.0. (refer to [Server Installation](#) on page 18)
3. Activate 3PS Network Server 3.0 license (refer to License and Activation on page 22)
4. Restore the system settings with backup file(.xml). (refer to [Restore System Data](#) on page 113)

Migrate 3PS Network Server 3.0 to Another Computer

For the migration of 3PS Network Server 3.0 server between two computers, make sure you have contacted Inaxsys Technical Support for assistance in resetting your previous activation record on Inaxsys license data server, so that this license key can be activated again with another MAC address.

Please have the following data prepared before migration takes place: (1) 3PS Network Server 3.0 install shield application file, (2) 3PS Network Server 3.0 license key or activation file (.lic) (3) 3PS Network Server 3.0 backup file(.xml). (4) make sure you have made a copy of previous 3PS Network Server 3.0 recordings folder, (5) a copy of 3PS Network Server 3.0 recording index file folder.


To start,

1. Install 3PS Network Server 3.0 on new server computer (refer to [Server Installation](#) on page 18).
2. Activate 3PS Network Server 3.0 license on new server computer (refer to License and Activation on page 22).
3. Copy the whole backup recordings folder(s) to the storage hard drive(s).
4. Copy the whole backup **DataBase** folder to **Inaxsys\DataSource** folder on server computer (default path is C:\Program Files\Inaxsys\NVR3\ DataSource\). Remember to replace the existing folders that are with the same folder names (refer to [Back Up System Data](#) on page 111).
5. Restore the system settings with backup file (refer to [Restore System Data](#) on page 113).
6. Uninstall the 3PS Network Server 3.0 on previous computer and remove sensitive files if needed (refer to [Un-install Server Software](#) on page 109).

Advanced Administrative Tasks

To assist the 3PS Network Server administrator in monitoring the server status and basic trouble-shooting, the **NVR3 Administrator Tool** is installed along with 3PS Network Server program on the server computer.

This tool will start running as the server computer starts up, and resides in the system tray. You may double-click the icon to open this tool.

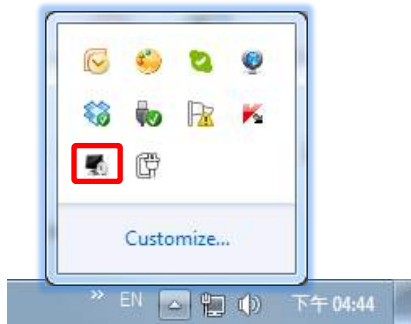


3PS Network Server Status

You may observe the 3PS Network Server services status on **Service** tab.



Change Server Port

On **Settings** tab, input a new port and then click “**Apply**”.

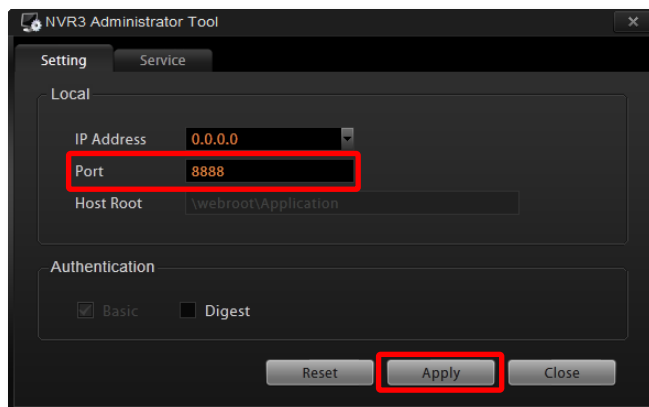

Change Authentication Method

You may enable the **Digest** authentication other than the basic way. With this method, User's credentials are encrypted using MD5 algorithm. In this way, there is more secure protection to prevent from unauthorized access.

Please also note that, with **Digest** authentication method enabled, a mobile client user or a domain user will be blocked from 3PS Network Server system.

